

## TABLE OF CONTENTS

### Introduction

Basic Connection Principles **O-2 - O-5** Terminal Stud Size Chart **O-32**

### Hardware Data

DURIUM™ Steel/Aluminum Tightening **O-6** AWG vs. Metric Wire Sizes **O-33, O-34**

Torques

DURIUM™ Hex Bolts Data **O-6** Inches - Millimeters Conversion Chart **O-35**

UL Tightening Torque UL486 **O-7, O-8**

Recommended Clamping on Bolted Connectors **O-9** BURNDY Conductor Numbering System **O-36, O-37**

### Cable Data (Tables)

#### Copper Cable

Copper Tube **O-10**

Solid Copper Wire **O-11**

Compact Stranded Copper Cable **O-11**

Stranded Copper Cable **O-12, O-13**

Flexible Copper Stranded Cable **O-14, O-15**

Present Installation Tool Index **O-38 - O-48**

Color Coding for Overhead Connectors **O-49**

Color Coding for AL/CU Connectors **O-49**

#### Aluminum and ACSR Cable

Aluminum Tube **O-16**

Aluminum 1350 Cable Bare - Classes AA and A **O-17**

Aluminum 1350 Cable Bare - Class B **O-18**

ACSR Cable **O-19**

High Strength ACSR Cable **O-20**

Compact Aluminum 1350 Cable **O-21**

Aluminum Alloy 5005 Cable **O-22**

Aluminum 6201 Cable **O-22**

Aluminum Alloy 8000 Series "O" Temper Cable **O-23, O-24**

Compact ACSR Cable **O-25**

ACSR/TW Cable (Trap Wire) **O-25, O-26**

AAC/TW Cable (All Aluminum Trap Wire) **O-26**

ACAR Cable **O-27**

SSAC Cable **O-27, O-28**

Color Coding for Copper Lugs and Splices **O-50**

Product/Trade Name Index **O-51**

Alpha-Numeric Index **O-52 - O-99**

Terms and Conditions **O-100 - O-101**

#### Steel Conductors

Copperweld Cable **O-29**

Copperweld - Copper Cable **O-29, O-30**

Galvanized Steel Cable **O-31**

Aluminum Coated Steel Cable **O-32**

## Introduction - Basic Electrical Connection Principles:

### Basic Factors:

The basic factors which influence the design and performance of pressure wire connections are as follows:

1. Creep
2. Surface Oxide
3. Corrosion

A fourth factor, known as thermal effects, is also a consideration, but due to the technical nature and length of this topic, it will not be discussed in this publication.

At the outset it should be pointed out that these factors give rise to much more difficult problems in connections involving aluminum conductors than those encountered in copper to copper connections.

### Creep (Cold Flow)

Creep is the cold flow of the metal under pressure and it continues until the pressure reduces to a value at which any further creep is negligible. Creep properties depend on the particular metal or alloy and on its hardness; alloys having less creep than pure metals, and harder metals have less creep than soft metals. In a typical connection, the conductors are generally of pure metal and often of soft temper and therefore, subject to considerable creep. In addition, the condition is further exaggerated when aluminum is the conductor as compared to copper, since its creep rate is many times that of copper.

**Effect of Creep:** Figure 2 shows typical curves of total contact resistance plotted against total contact force. Curve A shows how the contact resistance continually decreases with increasing contact force. When the full contact force  $F_1$  is reached, the contact resistance reaches the low value of  $R_1$ . In general, the full tightening force on a connector greatly exceeds the maximum force for which there is no appreciable creep. Therefore, the force will gradually settle down to a value after which there will be no further significant creep. Fortunately, however, the resistance does not climb back up along curve A, the tightening curve, but instead it follows a new curve B, the relaxing curve, along which the resistance changes very little until the force relaxes to a value such as  $F_2$ .

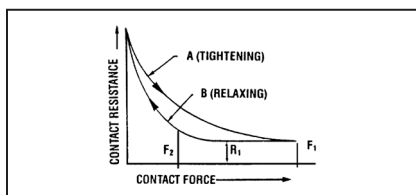


Figure 2

Admittedly, the point of “no appreciable creep” is difficult to define. For pure metals, especially in the soft state, there is always some creep, even at very low pressures at room temperature. However, we do know that the pressure required to produce the same creep rate is several times greater for copper than for aluminum. Thus, to permit the same contact force  $F_2$  for aluminum and copper, the contact area  $A$  required for aluminum can be expected to be considerably greater than that required for copper. This explains why the contact areas for connectors for aluminum must be considerably greater than for copper and why many light duty connectors for copper are entirely inadequate for aluminum, even when specially plated and when recommended compounds are used on the contact surfaces.

**Relaxation:** Relaxation of pressure due to creep, or for any other reason, would be a much more difficult factor in a pressure connection were it not for the relationship of contact pressure to contact resistance on the relaxation curve as shown in Figure 2. It is frequently observed that some time after the bolts of a clamp type connector are tightened, the bolt tensions are relaxed appreciably. The question arises as to whether it is necessary to retighten the bolts to the original torque value. In a properly designed connector, retightening is unnecessary since the contact resistance should increase very little due to the relaxation of pressure, as shown by the relaxation curve of Figure 2.

This fact is largely responsible for the successful operation of a compression connector. The application of the compression tool applies very high pressure, establishing very low contact resistance. The removal of the compression tool releases a very large proportion of this pressure, and creep further relaxes this pressure. Fortunately, the contact resistance increases very little due to this pressure relaxation.

**Contact Force:** The previous analysis shows that the total contact force largely determines the contact resistance. Thus, to achieve the desired low value of contact resistance, the proper size and number of bolts in a clamp type connector must be supplied, and the compression tool must apply the proper force to a compression connector. In addition, the connector must be designed with sufficient structural strength, contact area, and resilience, to assure that the contact force cannot relax beyond the point where contact resistance begins to rise appreciably, as shown in Figure 2.

### Surface Oxide

The contact of pure metallic surfaces cannot be assured in practical connections. Surface contamination must be expected, especially surface oxidation. These surface films are insulators as far as contact resistance is concerned, and they must be broken to achieve metal to metal contact to make an adequate electrical connection. The difficulty of breaking the film depends on the nature of the film, its thickness, and the metal on which it is formed.

Copper oxide is generally broken down by reasonably low values of contact pressure. Unless the copper is badly oxidized, good contact can be obtained with very little or no cleaning.

Silver oxide is even more easily broken down by the contact pressure; and since silver oxide forms less readily at elevated temperatures, silver contact surfaces are preferred over copper when used for high temperatures. For this reason, it is considered good practice to silver plate copper contact surfaces that must operate at temperatures over 200° C.

On the other hand, aluminum oxide is a hard, tenacious, high resistance film that forms very rapidly on the surface of aluminum exposed to air. In fact, it is the toughness of this film that gives aluminum its good corrosion resistance. The oxide film that forms after more than a few hours is too thick and tough to permit a low resistance contact without cleaning. The aluminum oxide film is transparent so that even the bright and clean appearance of an aluminum connector is no assurance that the low contact resistance can be attained without cleaning.

In addition to the necessity for cleaning the oxide from aluminum, the surface should be covered with a good connector compound to prevent the oxide from reforming. Common practice is to clean the surface with a wire brush or emery cloth. The compound should be applied immediately after cleaning, or the compound should be put on first and the surface scraped through the compound. Present practice is to scratch brush dry and to apply the compound immediately thereafter. This allows a more thorough job of cleaning the conductor.

**Contact Compounds:** Petrolatum or No-Oxid are good contact surface compounds for aluminum, but BURNDY® PENETROX™ A, a petroleum type compound containing zinc dust, has the additional advantage of assisting in the

## Introduction - Basic Electrical Connection Principles: (continued)

breaking down of the contact resistance. How this is accomplished is not certain, but it appears that the zinc particles of PENETROX™ probably act as current bridges in the breaks in the oxide film. For more complete information about the PENETROX™ line of compounds, refer to the Accessories section of this catalog.

**Interstrand Resistance:** The high contact resistance due to the oxide on the strands of an aluminum cable may be responsible for a poor distribution of current among the strands on the cable. Thus, the outer strands may carry much more than their share of the current and overheating of the cable may result. Tests have shown that even on new cable this effect of interstrand resistance can be considerable unless a good contact compound is used. The clamping action tends to break down the oxide and force the compound between the strands. This is particularly true of compression connectors due to the very high unit pressures developed.

The most effective way to break down interstrand resistance of aluminum cable is to use compression connectors filled with a compound having zinc particles. Then, when the end of the cable is inserted in the connector, the compound is forced between the strands where it very effectively breaks down the interstrand resistance upon application of the compressive force.

**Plating Aluminum:** Plating the contact surfaces of aluminum connectors will prevent the formation of aluminum oxide. Electro-tin, cadmium and zinc platings have been used for this purpose. However, the use of a plated aluminum conductor, does not make it less necessary to scratch brush the aluminum conductor, nor does it reduce the need for a good contact compound. Additional problems are introduced due to the plating on aluminum which render it of very doubtful value over the proper use of base aluminum. This will be more fully discussed later.

### Corrosion

The electrical conductivity and mechanical strength of an electrical connection must remain stable under the deteriorating influences of the environment. This deterioration is corrosion. It is the electrolytic action of moisture and other elements of the atmosphere in conjunction with the metals of the connection. If the conductors and connectors are of copper or a corrosion resistant copper alloy, corrosion is usually a minor factor. However, it is a very vital factor if aluminum is involved.

If moisture can be kept away from the connection, corrosion will not be a factor. The electrical connection of a high voltage splice on insulated cable is generally free from corrosion since the taping may be used to avoid corrosion on bare cable, provided it excludes moisture. It is difficult to get a good tape seal to the conductor itself, especially on stranded cable. If moisture does penetrate the taping, it will not dry out as readily as if the joint were untaped. Various plastic materials are available today for covering low voltage connections or for bare conductor connections on high voltage. Unless such coverings are completely moisture-proof, it is better to rely on installation with a good contact compound, using a connector designed to resist corrosion.

**Galvanic Action:** Whenever dissimilar metals are in the presence of an electrolyte, a difference in electric potential is developed. One metal becomes the cathode and receives a positive charge. The other becomes the anode and receives a negative charge. When these metals are in contact, an electrical current will flow, as in the case of any short-circuited electric cell. This electrolytic action causes an attack of the anodic metal, leaving the cathodic metal unharmed. The extent of the attack is proportional to the strength of the electrolytic current, which in turn is proportional to the electric potential difference developed.

The magnitude of the potential difference generated between two dissimilar metals can be seen by the position of these metals in the electrolytic series. Figure 3 is such a series. When two metals are in contact in an electrolyte, the one higher up in this series is the anode, the corroded metal, while the one lower is the cathode, the protected metal. The further apart the metals are in this series, the greater the electrolytic potential difference, and the greater the attack to the anodic metal.

Note that copper and aluminum are quite far apart in the series, copper being cathodic and aluminum anodic. Hence, when aluminum and copper are in contact in an electrolyte, the aluminum can be expected to be severely attacked.

**Crevice Corrosion:** Electrolytic attack can also occur between like metals due to a phenomenon known as oxygen concentration cell or crevice corrosion. Since oxygen is necessary for corrosive action, a variation in the concentration of

oxygen where a metal is exposed to an electrolyte will generate a difference of potential, and cause a corrosive attack in the oxygen starved area. Thus, since an electrolyte in a deep crevice is freely exposed to the air at the outside, the concentration of oxygen will be greatest at the mouth of the crevice. Then corrosion can be expected to occur in the crevice remote from the surface. Crevice corrosion can be prevented if the crevice is filled with a compound to exclude moisture. Thus, within the contact groove of an aluminum connector containing an aluminum conductor, there will be numerous crevices in which corrosion will take place unless a good connector compound is applied during installation. Copper, being a more noble metal, appears to be much less subject to crevice corrosion.

**Corrosion Testing:** The effectiveness of an electrical connection to resist corrosion can be tested in the laboratory under conditions designed to greatly accelerate the natural corrosive conditions of actual service. The most widely accepted means is the standard salt spray chamber. In this chamber the specimens are placed in a salt fog made by atomizing a 20% salt solution at 100° F.

BURNDY, as well as other manufacturers and utility companies, have done a great deal of testing and a considerable area of agreement has been reached. There are, however, minor differences in recommended practices. The problem is concerned with aluminum and aluminum to copper connections since the effect of corrosion on copper to copper connections is far less serious. Let us study the recommended practices.

**Aluminum to Aluminum Connections:** For joining aluminum to aluminum conductors, there is little disagreement that an aluminum bodied connector is the proper choice, since this obviously eliminates the galvanic corrosion of dissimilar metals. However, even in this case, care must be taken to prevent crevice corrosion and to select an alloy of aluminum for the connector body that is free from cracking due to stress corrosion.

**Aluminum to Copper Connections:** Similarly, for joining aluminum to copper conductors, an aluminum bodied connector is the best choice since it prevents galvanic corrosion of the aluminum conductor, the most vulnerable element to attack in the connection. Realizing this, BURNDY initiated a research program aimed at finding the best way to make an aluminum

## Introduction - Basic Electrical Connection Principles: (continued)

## + LESS NOBLE (ANODIC)

- ↓ Magnesium
- ↓ Magnesium alloys
- ↓ Zinc
- ↓ Aluminum 1100
- ↓ Cadmium
- ↓ Aluminum 2024-T4
- ↓ Steel or Iron
- ↓ Cast Iron
- ↓ Chromium Iron (Active)
- ↓ Ni-Resist
- ↓ Type 304 Stainless (Active)
- ↓ Type 316 Stainless (Active)
- ↓ Lead Tin Solders
- ↓ Lead
- ↓ Tin
- ↓ Nickel (Active)
- ↓ Inconel
- ↓ Brasses
- ↓ Copper
- ↓ Bronzes
- ↓ Copper-Nickel alloys
- ↓ Monel
- ↓ Silver Solder
- ↓ Nickel (Passive)
- ↓ Inconel (Passive)
- ↓ Chromium-Iron (Passive)
- ↓ Type 304 Stainless (Passive)
- ↓ Type 316 Stainless (Passive)
- ↓ Silver
- ↓ Titanium
- ↓ Graphite
- ↓ Gold
- ↓ Platinum

## — MORE NOBLE (CATHODIC)

Figure 3

connector suitable for joining aluminum to copper conductors.

This led to the evolution of the “Massive Anode Principle” of connector design for joining conductors of dissimilar metal. On the basis of this principle, properly designed, all-aluminum connectors became available for universal use in joining aluminum to aluminum or aluminum to copper conductors.

**Massive Anode Principle:** By making the aluminum connector massive in comparison to the copper conductor, when the copper conductor emerges from the connector, the electrolytic current density over the exposed face of the aluminum connector is greatly reduced. This is schematically represented in Figure 4. Since the rate of corrosion is directly related to the current density on the surface of the anodic material, the relatively large face of the aluminum connector will suffer only minor attack.

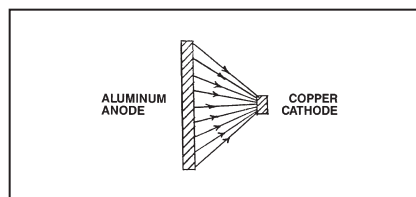


Figure 4

In addition, because the aluminum connector body is massive in the region where the corrosion occurs, the small loss of metal caused by corrosion is insignificant, even after long periods of service. Furthermore, the connector design should be such that clamping bolts, and areas of high stress which provide structural strength, are not in the regions subject to galvanic attack.

The effectiveness of this theory has been amply demonstrated in salt spray corrosion tests in which the connectors were subject to 1,000 hours in the salt spray fog with only minor corrosive pitting adjacent to the copper conductor, as seen in Figure 5. In addition, the aluminum conductor was completely protected, and the joint resistance remained virtually unchanged. The test involved a wide variety of sizes and types of connectors showing the effectiveness for small service connectors as well as large power connectors. Figure 6 shows a large all aluminum clamp type T connector installed on 3-1/2" diameter copper run and 750 kcmil aluminum tap. The figure shows this connector which was opened up after 1,400 hours of the salt spray test. Note that the contact surfaces are bright and clean and the only

evidence is minor pitting along the faces adjacent to the copper.

\*It should be emphasized that a good compound should be used on the contact surfaces whether aluminum or copper is used in an aluminum connector.

**Position of Conductor:** A properly designed aluminum connector for joining aluminum to copper must provide adequate separation between the conductors to prevent electrolytic attack on the aluminum conductor. Even then, it is good practice to install the aluminum conductor above the copper conductor if possible. This will prevent pitting of the aluminum conductor due to copper salts being washed over the aluminum.

**Plated Aluminum Connectors:** Plating has been used as a means to make an aluminum connector suitable for copper conductor. Such platings as copper, zinc, tin and cadmium have been used. The plating of aluminum is much more critical than plating a more noble metal such as copper. In addition, a preplate, usually of copper or brass, must be applied, thus introducing numerous metals and further possibilities for galvanic corrosion.

To be effective in reducing galvanic corrosion between the copper conductor and the aluminum connector, the plated metal must be closer in the Electrolytic Series to copper than is aluminum. It must therefore, be cathodic to aluminum. Since porosity and minor scratches are always present, galvanic action can be expected in the presence of moisture, resulting in attack of the aluminum under the plating. Corrosion tests reveal attack in the form of a mottled appearance and flaking of the plating.

In addition, the presence of plated metal can cause galvanic attack of the aluminum conductor, thus reducing the protection offered to this conductor in an aluminum connector.

**Cleaning and the Use of Compound:** It should be emphasized that when aluminum connectors or conductors are involved, proper cleaning of the aluminum and the use of a good connector compound, such as BURNDY PENETROX™ A, are essential for trouble-free service. BURNDY, as well as other manufacturers, provide the contact grooves with a coating to make it unnecessary to clean the connectors, but in all cases the aluminum conductor should be

## Introduction - Basic Electrical Connection Principles: (continued)

cleaned by means such as scratch brushing, and immediately coated with the connector compound.

To simplify the application of the compound, and to assure its use, almost all BURNDY aluminum connectors, except the large clamp type substation connectors, are supplied factory filled with PENETROX™ compound. For the tubular compression connectors, the tubular barrels are sufficiently filled with PENETROX™ and capped. For other types, the contact grooves are filled with PENETROX™ and enclosed in plastic packaging in a process called 'stripsealing'.

**Clamp vs. Compression:** In general, a compression connection can be expected to be more corrosion resistant than a clamp connection. The high pressures applied to a compression connector more effectively seal the contact against the penetration of moisture. The tubular sleeve of a compression connector has no side openings such as exist in clamp connectors between the clamping members. On the other hand, the clamp connector can be made more corrosion resistant if the conductor grooves conform more closely with the conductor contour. Thus a clamp connector made to accommodate a wide range of conductor sizes cannot be expected to be as corrosion resistant as one designed for one specific conductor size. Nevertheless, the differences in effectiveness of various designs can be minimized if a good contact compound is used.

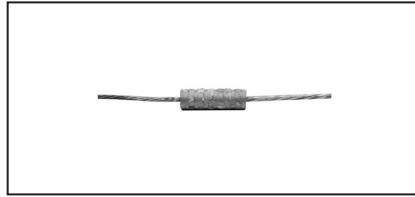


Figure 5

*Negligible Corrosion of Severe Salt Spray on Compression Connector Joining Aluminum to Copper.*

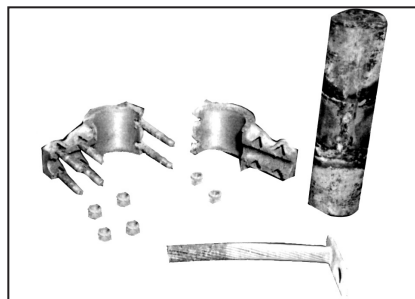


Figure 6

*Large Aluminum Bolted Connector Joining Copper Run to Aluminum Tap After Severe Salt Spray Test.*

**HARDWARE DATA**

**Recommended Tightening Torque**

The hardware used in connectors must be compatible with the connector material, have high mechanical strength and be corrosion resistant.

Copper alloy connectors have hardware made of DURIUM™, which is the BURNDY trade name for silicon bronze alloy ASTM B99. This material was first introduced by BURNDY in 1927 for use in outdoor construction and today is the standard throughout the industry.


Aluminum connectors generally have aluminum alloy hardware. The bolts are 2024T4 and anodized to resist corrosion. The nuts are 6061T6, which is resistant to corrosion and does not require anodizing. Bolts are lubricated to eliminate galling and to provide consistent clamping forces.

The size material for clamping hardware are selected to provide the required force when tightened to the recommended torque. To reduce or greatly exceed the recommended torque can adversely affect the performance of the connector.

Steel Hardware	
Bolt Size	Recommended Torque (Inch Pounds)
1/4 - 20	80
5/16 - 18	180
3/8 - 16	240
1/2 - 13	480
5/8 - 11	660
3/4 - 10	1050

Aluminum Hardware	
Bolt Size	Recommended Torque (Inch Pounds)
1/2 - 13	300
5/8 - 11	480
3/4 - 10	650

**DURIUM™ (Silicon Bronze) Hexagonal Bolt Data**

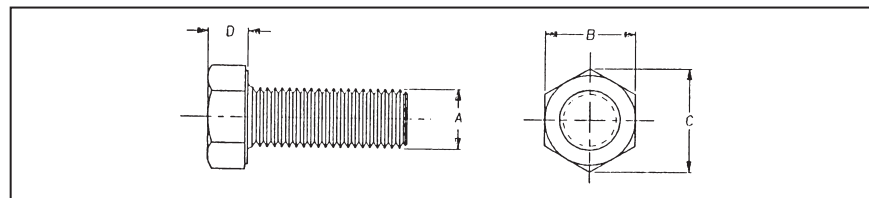

DURIUM™ (Silicon Bronze) Hardware							
Catalog Number Series*	"A" Bolt Size	"B"	"C"	"D"	Recommended Torque (in-lb)**	Min. Breaking Force (lb)	Min. Shearing Force (lb)
25X__HEB	1/4 - 20	7/16	.50	.16	80	1,780	990
31X__HEB	5/16 - 18	1/2	.56	.21	180	2,930	1,640
38X__HEB	3/8 - 16	9/16	.65	.24	240	4,350	2,430
50X__HEB	1/2 - 13	3/4	.87	.32	480	7,950	4,460
62X__HEB	5/8 - 11	15/16	1.08	.40	660	12,700	7,100
75X__HEB	3/4 - 10	1-1/8	1.30	.48	1050	17,510	10,540


\* \_\_ is substituted for bolt length; Consult sales representative for available lengths

\*\*These torque values develop maximum bolt preload

This drawing is based on BURNDY engineering specification

**HARDWARE DATA (continued)**

**Recommended Termination Hardware**

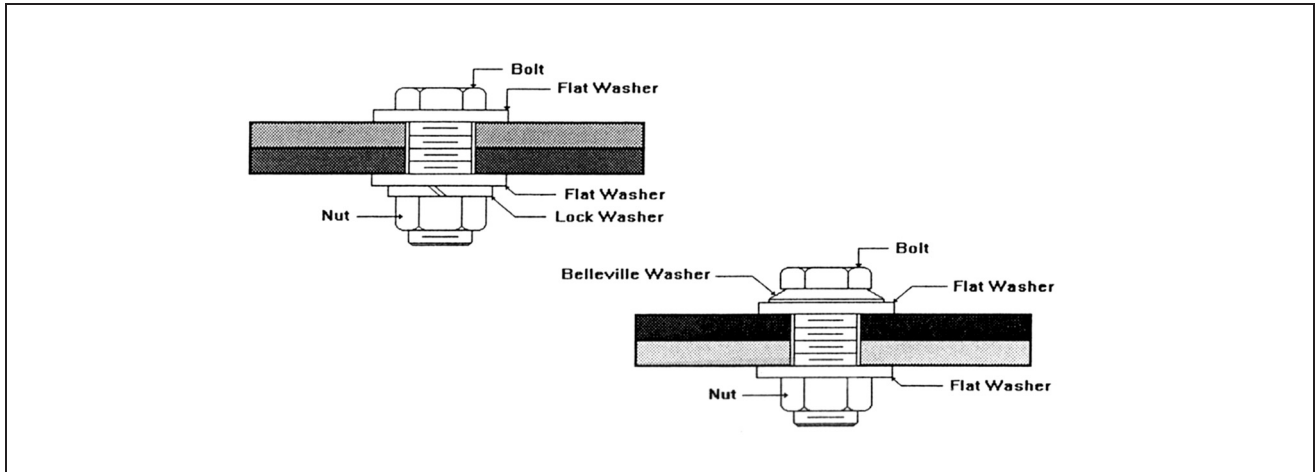

**Recommended Tightening Torque per UL 486A and UL486B**

**Table 21 - Tightening torque for screws**

Conductor Size Installed in Connector		Tightening Torque, N•m (lbf-in)			
		Slotted Head No. 10 and Larger*		Hexagonal Head - External Drive Socket Wrench	
		Slot Width - 1.2mm (.047 in) or Less and Slot Length - 6.4mm (1/4 in.) or less	Slot Width - Over 1.2mm (.047 in) or Slot Length - Over 6.4mm (1/4 in.)	Split-Bolt Connectors	Other Connectors
AWG or kcmil	mm <sup>2</sup>				
30 - 10	.05 - 5.3	2.3 (20)	4.0 (35)	9.0 (80)	8.5 (75)
8	8.4	2.8 (25)	4.5 (40)	9.0 (80)	8.5 (75)
6 - 4	13.2 - 21.2	4.0 (35)	5.1 (45)	18.6 (165)	12.4 (110)
3	26.7	4.0 (35)	5.6 (50)	31.1 (275)	16.9 (150)
2	33.6	4.5 (40)	5.6 (50)	31.1 (275)	16.9 (150)
1	42.4	-	5.6 (50)	31.1 (275)	16.9 (150)
1/0 - 2/0	53.5 - 67.4	-	5.6 (50)	43.5 (385)	20.3 (180)
3/0 - 4/0	85.0 - 107.2	-	5.6 (50)	56.5 (500)	28.2 (250)
250 - 350	127 - 177	-	5.6 (50)	73.4 (650)	36.7 (325)
400	203	-	5.6 (50)	93.2 (825)	36.7 (325)
500	253	-	5.6 (50)	93.2 (825)	42.4 (375)
600 - 750	304 - 380	-	5.6 (50)	113.0 (1000)	42.4 (375)
800 - 1000	406 - 508	-	5.6 (50)	124.3 (1100)	56.5 (500)
1250 - 2000	635 - 1000	-	-	124.3 (1100)	67.8 (600)

\* For values of slot width or length not corresponding to those specified, select the largest torque value associated with the conductor size. Slot width is the nominal design value. Slot length shall be measured at the bottom of the slot.

## HARDWARE DATA (continued)

### Recommended Tightening Torque per UL486A & UL486B

**Table 22 - Tightening torque for slotted head screws smaller than No. 10 intended for use with 8 AWG (8.4 mm<sup>2</sup>) or smaller conductors**

Slot Length of Screw*		Tightening Torque, N•m (lbf-in)	
		Slot Width of Screw Smaller than 1.2 mm (.047 in.) <sup>b</sup>	Slot Width of Screw 1.2mm (.047 in.) and larger**
mm	inch		
Less than 4	Less than 5/32	0.79 (7)	1.0 (9)
4	5/32	0.79 (7)	1.4 (12)
4.8	3/16	0.79 (7)	1.4 (12)
5.6	7/32	0.79 (7)	1.4 (12)
6.4	1/4	1.0 (9)	1.4 (12)
7.1	9/32	-	1.7 (15)
Above 7.1	Above 9/32	-	2.3 (20)

\* For slot lengths of intermediate values, select torques pertaining to next shorter slot length.

Also see Table 21 for screws with multiple tightening means.

Slot length shall be measured at the bottom of the slot.

\*\* Slot width is the nominal design value

### Recommended Tightening Torque per UL486A & UL486B

**Table 23 - Tightening torque for screws with recessed allen or square drives**

Socket Width Across Flats*		Tightening Torque, N•m (lbf-in)
mm	inch	
3.2	1/8	5.1 (45)
4.0	5/32	11.3 (100)
4.8	3/16	13.6 (120)
5.6	7/32	16.9 (150)
6.4	1/4	25.4 (225)
7.9	5/16	33.9 (300)
9.5	3/8	45.2 (400)
12.7	1/2	56.6 (500)
14.3	9/16	67.8 (600)

\* See Table 21 for screws with multiple tightening means



**HARDWARE DATA (continued)**


**Recommended Clamping on Bolted Connectors:**

When installing a bolted connector, an appropriate sequence needs to be followed.


**INSTALLATION INSTRUCTIONS:**

1. Nuts need to be tightened up to 30% of expected torque.
2. A check needs to be done to ensure the clamping elements are even.

**Even clamping elements**

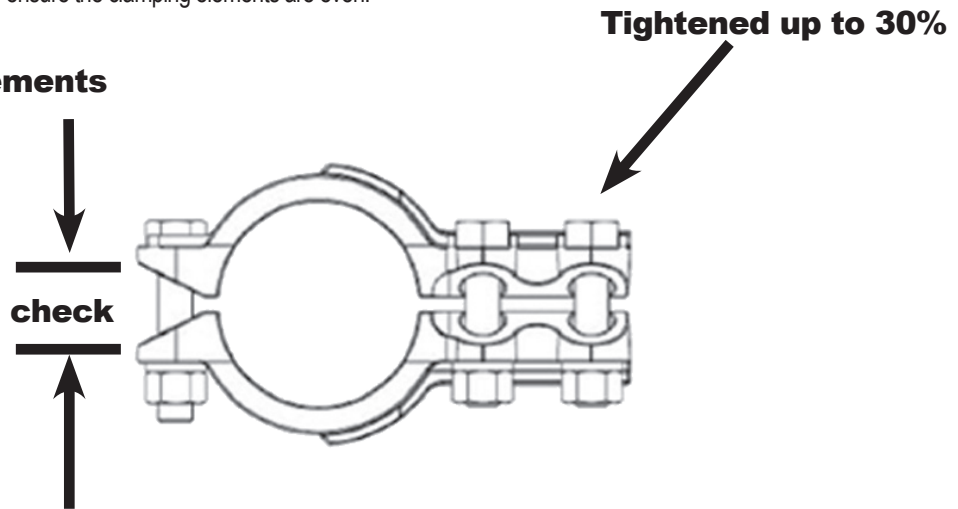

3. Tightening has to follow a sequence (1-6) as shown below. As a general rule, the torque has to be applied to the nut. For ease of installation most connectors are designed for one wrench installation. A torque wrench is recommended when tightening the nut to ensure the proper torque is applied.

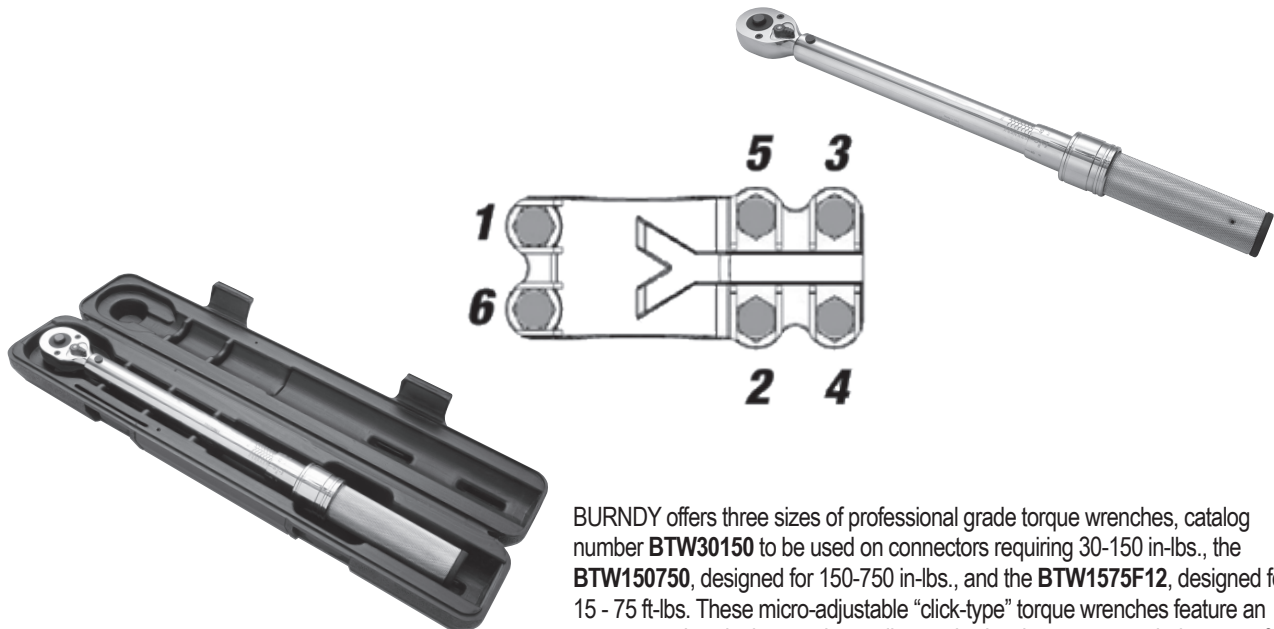

BURNDY offers three sizes of professional grade torque wrenches, catalog number **BTW30150** to be used on connectors requiring 30-150 in-lbs., the **BTW150750**, designed for 150-750 in-lbs., and the **BTW1575F12**, designed for 15 - 75 ft-lbs. These micro-adjustable "click-type" torque wrenches feature an easy-to-read scale that can be easily matched to the recommended torque of each of our mechanical connector products. Calibration traceable to N.I.S.T.

## CABLE DATA

## COPPER TUBE (BUS)

Size of Tube IPS	Diameter of Tube (Inches)		Wall Thickness (Inches)
	Outside	Inside	
<b>STANDARD PIPE SIZES</b>			
1/4"	0.540	0.375	0.082
3/8"	0.675	0.494	0.090
1/2"	0.840	0.625	0.107
3/4"	1.050	0.822	0.114
1"	1.315	1.062	0.126
1-1/4"	1.660	1.368	0.146
1-1/2"	1.900	1.600	0.150
2"	2.375	2.062	0.156
2-1/2"	2.875	2.500	0.187
3"	3.500	3.062	0.219
3-1/2"	4.000	3.500	0.250
4"	4.500	4.000	0.250
4-1/2"	5.000	4.500	0.250
5"	5.563	5.063	0.250
6"	6.625	6.125	0.250
<b>EXTRA HEAVY PIPE SIZES</b>			
1/4"	0.540	0.294	0.123
3/8"	0.675	0.421	0.127
1/2"	0.840	0.542	0.149
3/4"	1.050	0.736	0.157
1"	1.315	0.951	0.182
1-1/4"	1.660	1.272	0.194
1-1/2"	1.900	1.494	0.203
2"	2.375	1.933	0.221
2-1/2"	2.875	2.315	0.280
3"	3.500	2.892	0.304
3-1/2"	4.000	3.358	0.321
4"	4.500	3.818	0.341
4-1/2"	5.000	4.250	0.375
5"	5.563	4.813	0.375
6"	6.625	5.751	0.437

Size of Tube IPS	Diameter of Tube (Inches)		Wall Thickness (Inches)
	Outside	Inside	
<b>DOUBLE EXTRA HEAVY PIPE SIZES</b>			
1/2"	0.840	0.252	0.294
3/4"	1.050	0.434	0.308
1"	1.315	0.599	0.358
1-1/4"	1.660	0.896	0.382
1-1/2"	1.900	1.100	0.400
2"	2.375	1.503	0.436
2-1/2"	2.875	1.771	0.552
3"	3.500	2.300	0.600
3-1/2"	4.000	2.728	0.636
4"	4.500	3.152	0.674
4-1/2"	5.000	3.580	0.710
5"	5.563	4.063	0.750
6"	6.625	4.897	0.864

Tube dimensions (excepting wall thickness of double extra heavy) taken from A.S.T.M. Specification B42-33.

Tubular values based on a density of 0.322 pound per cubic inch.

\* Conductivity of 98% I.A.C.S. at 20° C or 68° F

**CABLE DATA (continued)**

**SOLID COPPER WIRE (ASTM B1, B2, & B3)**

Size AWG (Solid)	Wire Dia (Inch)	Hard Drawn	Medium Drawn	Soft Drawn
		Normal Breaking Load (Pounds)	Minimum Breaking Load (Pounds)	Elongation in 10 in. % Min.
18	.040	85.8	67.6	25
17	.045	107.5	84.7	25
16	.050	135.2	106.2	25
15	.057	170.0	133.0	25
14	.064	213.8	166.6	25
13	.071	268.2	208.0	25
12	.080	337.0	261.6	25
11	.090	422.5	327.6	25
10	.101	529.2	410.4	25
9	.114	661.0	514.2	30
8	.128	826.0	643.9	30
7	.144	1,030.0	806.6	30
6	.162	1,280.0	1,010.0	30
5	.181	1,591.0	1,265.0	30
4	.204	1,970.0	1,584.0	30
3	.229	2,439.0	1,984.0	30
2	.257	3,003.0	2,450.0	30
1	.289	3,688.0	3,024.0	30
1/0	.324	4,519.0	3,730.0	35
2/0	.364	5,518.0	4,599.0	35
3/0	.409	6,722.0	5,667.0	35
4/0	.460	8,143.0	6,980.0	35

**COMPACT STRANDED COPPER CABLE  
(ASTM SPEC. B496)**

Conductor Size		Number of Wires	Conductor Dia (in)
KCMIL	AWG		
1000		61 <sup>1</sup>	1.060
900		61 <sup>1</sup>	0.999
800		61 <sup>1</sup>	0.938
750		61 <sup>1</sup>	0.908
700		61 <sup>1</sup>	0.877
650		61 <sup>1</sup>	0.845
600		61 <sup>1</sup>	0.813
550		61 <sup>1</sup>	0.775
500		37 <sup>2</sup>	0.736
450		37 <sup>2</sup>	0.700
400		37 <sup>2</sup>	0.659
350		37 <sup>2</sup>	0.616
300		37 <sup>2</sup>	0.570
250		37 <sup>2</sup>	0.520
	4/0	19 <sup>3</sup>	0.475
	3/0	19 <sup>3</sup>	0.423
	2/0	19 <sup>3</sup>	0.376
	1/0	19 <sup>3</sup>	0.336
	1	19 <sup>3</sup>	0.299
	2	7	0.268
	4	7	0.213
	6	7	0.169
	8	7	0.134

<sup>1</sup> 58 Wires Minimum

<sup>2</sup> 35 Wires Minimum

<sup>3</sup> 18 Wires Minimum

## CABLE DATA (continued)

## STRANDED COPPER WIRE (ASTM B8 EXCLUDING BREAKING LOADS)

Size		A.S.T.M. Strandings			Hard Drawn	Medium Drawn	Soft Drawn
Stranded		Class	No. of Wires	Cable Diameter (Inches)	Minimum Breaking Load (Pounds)		
Circular Mils	AWG						
1,022	20	B	7	0.036	50.0	40.67	32.1
1,624	18	B	7	0.045	79.0	63.91	51.0
2,583	16	B	7	0.057	124.7	100.4	81.1
4,107	14	B	7	0.072	197.1	157.7	124.2
6,530	12	B	7	0.091	311.1	247.7	197.5
10,380	10	B	7	0.116	491.7	388.9	314.0
13,090	9	B	7	0.130	618.2	487.4	395.9
16,510	8	B	7	0.146	777.2	610.7	499.2
20,820	7	B	7	0.164	977.1	765.2	629.5
26,250	6	B	7	0.184	1,288.0	958.6	793.8
33,100	5	B	7	0.206	1,542.0	1,201.0	1,001.0
41,740	4	AA	3	0.254	1,879.0	1,465.0	1,213.0
41,740	4	B&A	7	0.232	1,938.0	1,505.0	1,262.0
52,630	3	AA	3	0.285	2,359.0	1,835.0	1,530.0
52,630	3	B&A	7	0.260	2,433.0	1,885.0	1,592.0
66,370	2	AA	3	0.320	2,913.0	2,299.0	1,929.0
66,370	2	B&A	7	0.292	3,045.0	2,361.0	2,007.0
83,690	1	AA	3	0.360	3,621.0	2,879.0	2,432.0
83,690	1	A	7	0.328	3,804.0	2,958.0	2,432.0
83,690	1	B	19	0.332	3,899.0	3,037.0	2,531.0
105,500	1/0	A&A	7	0.368	4,752.0	3,705.0	3,067.0
105,500	1/0	-	12	0.390	4,841.0	3,755.0	3,191.0
105,500	1/0	B	19	0.373	4,901.0	3,805.0	3,191.0
133,100	2/0	A&A	7	0.414	5,926.0	4,640.0	3,867.0
133,100	2/0	-	12	0.438	6,048.0	4,703.0	3,867.0
133,100	2/0	B	19	0.419	6,152.0	4,765.0	4,024.0
167,800	3/0	A&A	7	0.464	7,366.0	5,812.0	4,876.0
167,800	3/0	-	12	0.492	7,556.0	5,890.0	4,876.0
167,800	3/0	B	19	0.470	7,698.0	5,970.0	5,074.0
211,600	4/0	A&A	7	0.522	9,154.0	7,278.0	6,149.0
211,600	4/0	-	12	0.522	9,483.0	7,378.0	6,149.0
211,600	4/0	B	19	0.528	9,617.0	7,479.0	6,149.0

**CABLE DATA (continued)**

**STRANDED COPPER WIRE (ASTM B8 EXCLUDING BREAKING LOADS continued)**

Size	A.S.T.M. Strandings			Hard Drawn	Medium Drawn	Soft Drawn
	Circular Mils	Class	No. of Wires			
250 kcmil	AA	12	0.600	11,130	8,717	7,265
250 kcmil	A	19	0.574	11,360	8,986	7,265
250 kcmil	B	37	0.575	11,560	8,952	7,559
300 kcmil	AA	12	0.657	13,170	10,390	8,718
300 kcmil	A	19	0.628	13,510	10,530	8,718
300 kcmil	B	37	0.630	13,870	10,740	9,071
350 kcmil	AA	12	0.710	15,140	12,040	10,170
350 kcmil	A	19	0.679	15,590	12,200	10,170
350 kcmil	B	37	0.681	16,060	12,450	10,580
400 kcmil	A&AA	19	0.726	17,810	13,950	11,620
400 kcmil	B	37	0.728	18,320	14,140	11,620
450 kcmil	AA	19	0.770	19,750	15,590	13,080
450 kcmil	B&A	37	0.772	20,450	15,900	13,080
500 kcmil	AA	19	0.811	21,950	17,320	14,530
500 kcmil	B&A	37	0.813	22,510	17,550	14,530
600 kcmil	A&AA	37	0.891	27,020	21,060	17,440
600 kcmil	B	61	0.893	27,530	21,350	18,140
700 kcmil	AA	37	0.963	31,170	24,410	20,340
700 kcmil	B&A	61	0.964	31,820	24,740	20,340
750 kcmil	AA	37	0.997	33,400	26,150	21,790
750 kcmil	B&A	61	0.998	34,090	26,510	21,790
800 kcmil	AA	37	1.029	35,120	27,710	23,250
800 kcmil	B&A	61	1.031	36,360	28,270	23,250
900 kcmil	AA	37	1.092	39,510	31,170	26,150
900 kcmil	B&A	61	1.094	40,520	31,590	26,150
1000 kcmil	AA	37	1.151	43,830	34,400	29,060
1000 kcmil	B&A	61	1.152	45,030	35,100	29,060
1250 kcmil	A	61	1.288	55,670	43,590	36,320
1250 kcmil	B	91	1.289	56,280	43,880	36,320
1500 kcmil	A	61	1.411	65,840	51,950	43,590
1500 kcmil	B	91	1.412	67,540	52,650	43,590
1750 kcmil	A	91	1.526	77,930	61,020	50,850
1750 kcmil	B	127	1.526	78,800	61,430	50,850
2000 kcmil	A	91	1.630	87,790	69,270	58,120
2000 kcmil	B	127	1.632	90,050	70,210	58,120

## CABLE DATA (continued)

## FLEXIBLE COPPER STRANDED CABLE

Conductor Size kcmil or B & S G (AWG)	# Strands	Strand Diameter	Nominal Diameter	Class
8	41	.0201	.156	I
8	49	.0184	.166	G
8	133	.0111	.167	H
8	168	.010	.157	K
8	420	.0063	.162	M
7	49	.0206	.185	G
7	52	.0201	.185	I
7	133	.0125	.188	H
7	210	.010	.179	K
7	532	.0063	.196	M
6	49	.0231	.208	G
6	63	.0201	.207	I
6	133	.0140	.210	H
6	266	.010	.210	K
6	665	.0063	.215	M
5	49	.0260	.234	G
5	84	.0201	.235	I
5	133	.0158	.237	H
5	336	.010	.235	K
5	836	.0063	.240	M
4	49	.0292	.263	G
4	105	.0201	.263	I
4	133	.0177	.266	H
4	420	.010	.272	K
4	1064	.0063	.269	M
3	49	.0328	.295	G
3	133	.0199	.299	I
3	133	.0201	.291	H
3	532	.010	.304	K
3	1323	.0063	.305	M
2	49	.0368	.331	G
2	133	.0223	.335	I
2	161	.0201	.319	H
2	665	.010	.338	K
2	1666	.0063	.337	M
1	133	.0251	.377	G
1	210	.0201	.367	I
1	259	.018	.378	H
1	836	.010	.397	K
1	2107	.0063	.376	M

Conductor Size kcmil or B & S G (AWG)	# Strands	Strand Diameter	Nominal Diameter	Class
1/0	133	.0282	.423	I
1/0	259	.0202	.424	G
1/0	266	.0201	.441	H
1/0	1064	.010	.451	K
1/0	2646	.0063	.423	M
2/0	133	.0316	.474	G
2/0	259	.0227	.477	I
2/0	342	.0201	.500	H
2/0	1323	.010	.470	K
2/0	3325	.0063	.508	M
3/0	133	.0355	.533	G
3/0	259	.0255	.536	I
3/0	418	.0201	.549	H
3/0	1666	.010	.533	K
3/0	4256	.0063	.576	M
4/0	133	.0399	.599	G
4/0	259	.0286	.601	I
4/0	532	.0201	.613	H
4/0	2107	.010	.627	K
4/0	5320	.0063	.645	M
250	259	.0311	.650	G
250	427	.0242	.653	I
250	637	.0201	.682	H
250	2499	.010	.682	K
250	6384	.0063	.713	M
300	259	.0340	.714	G
300	427	.0265	.716	I
300	735	.0201	.737	H
300	2989	.010	.768	K
300	7581	.0063	.768	M
350	259	.0368	.773	G
350	427	.0286	.772	I
350	882	.0201	.800	H
350	3458	.010	.809	K
350	8806	.0063	.825	M
400	259	.0393	.825	G
400	427	.0306	.826	I
400	980	.0201	.831	H
400	3990	.010	.878	K
400	10101	.0063	.901	M

## CABLE DATA (continued)

## FLEXIBLE COPPER STRANDED CABLE (continued)

Conductor Size kcmil or B & S G (AWG)	# Strands	Strand Diameter	Nominal Diameter	Class
450	259	.0417	.876	I
450	427	.0325	.878	G
450	1127	.0201	.894	H
450	4522	.010	.933	K
450	11396	.0063	.940	M
500	259	.0439	.922	G
500	427	.0342	.923	I
500	1225	.0201	.941	H
500	5054	.010	.988	K
500	12691	.0063	.997	M
600	427	.0375	1.013	G
600	703	.0292	1.022	I
600	1470	.0201	1.027	H
600	5985	.010	1.125	K
600	14945	.0063	1.084	M
700	427	.0405	1.094	G
700	703	.0316	1.106	I
700	1729	.0201	1.194	H
700	6916	.010	1.207	K
700	17507	.0063	1.183	M
800	427	.0433	1.169	G
800	703	.0337	1.180	I
800	1995	.0201	1.290	H
800	7980	.010	1.305	K
800	20069	.0063	1.256	M
900	427	.0459	1.239	G
900	703	.0358	1.253	I
900	2261	.0201	1.372	H
900	9065	.010	1.323	K
900	22631	.0063	1.331	M
1000	427	.0484	1.307	G
1000	703	.0377	1.320	I
1000	2527	.0201	1.427	H
1000	10101	.010	1.419	K
1000	25193	.0063	1.404	M

## CABLE DATA (continued)

## ALUMINUM TUBE

Size of Tube IPS	Diameter of Tube (Inches)		Wall Thickness (Inches)
	Outside	Inside	
<b>STANDARD PIPE SIZES</b>			
1/4"	0.540	0.364	0.088
3/8"	0.675	0.493	0.091
1/2"	0.840	0.622	0.109
3/4"	1.050	0.824	0.113
1"	1.315	1.049	0.133
1-1/4"	1.660	1.380	.0140
1-1/2"	1.900	1.610	0.145
2"	2.375	2.067	0.154
2-1/2"	2.875	2.469	0.203
3"	3.500	3.068	0.213
3-1/2"	4.000	3.548	0.226
4"	4.500	4.026	0.237
4-1/2"	5.000	4.506	0.247
5"	5.563	5.047	0.258
6"	6.625	6.065	0.280

Size of Tube IPS	Diameter of Tube (Inches)		Wall Thickness (Inches)
	Outside	Inside	
<b>EXTRA HEAVY PIPE SIZES</b>			
1/4"	0.540	0.302	0.119
3/8"	0.675	0.423	0.126
1/2"	0.840	0.546	0.147
3/4"	1.050	0.742	0.154
1"	1.315	0.957	0.179
1-1/4"	1.660	1.278	0.191
1-1/2"	1.900	1.500	0.200
2"	2.375	1.939	0.218
2-1/2"	2.875	2.323	0.276
3"	3.500	2.900	0.300
3-1/2"	4.000	3.364	0.318
4"	4.500	3.826	0.337
4-1/2"	5.000	4.290	0.355
5"	5.563	4.813	0.375
6"	6.625	5.761	0.432



**CABLE DATA (continued)**

**ALUMINUM 1350 CABLE  
BARE-CLASSES AA AND A - Hard Drawn**

Cable Code Word	Size (circular mils or AWG)	Copper Equivalent based on equal D.C. resistance, Cu 97% Al 61%	# of Wires	Cable Dia. (inches)	Ultimate Strength (pounds)
Peachbell	6	8	7	0.184	528
Rose	4	6	7	0.232	826
Lily	3	5	7	0.260	1022
Iris	2	4	7	0.292	1266
Pansy	1	3	7	0.328	1537
Poppy	1/0	2	7	0.368	1865
Aster	2/0	1	7	0.414	2350
Phlox	3/0	1/0	7	0.464	2845
Oxlip	4/0	2/0	7	0.522	3590
Daisy	266800	3/0	7	0.586	4525
Laurel	266800	3/0	19	0.593	4800
Tulip	336400	4/0	19	0.666	5940
Canna	397500	250000	19	0.724	6880
Cosmos	477000	300000	19	0.793	8090
Syringa	477000	300000	37	0.795	8600
Dahlia	556500	350000	19	0.856	9440
Mistletoe	556500	350000	37	0.858	9830
Orchid	636000	400000	37	0.918	11240
Violet	715500	450000	37	0.974	12640
Nasturtium	715500	450000	61	0.975	13150
Arbutus	795000	500000	37	1.026	13770
Lilac	795000	500000	61	1.028	14330
Anemone	874500	550000	37	1.077	14830
Crocus	874500	550000	61	1.078	15760
Magnolia	954000	600000	37	1.124	16180
Goldenrod	954000	600000	61	1.126	16860
Bluebell	1033500	650000	37	1.170	17530
Larkspur	1033500	650000	61	1.172	18260
Marigold	1113000	700000	61	1.216	19660
Narcissus	1272000	800000	61	1.300	22000
Carnation	1431000	900000	61	1.379	24300
Coreopsis	1590000	1000000	61	1.454	27000
Dogwood	1590000	1000000	91	1.454	28100

## CABLE DATA (continued)

ALUMINUM 1350 CABLE  
BARE-CLASS B

Size (circular mils or AWG)	Copper Equivalent based on equal D.C. resistance, Cu 97% Al 61%	# of Wires	Cable Dia. (inches)	Ultimate Strength (pounds) Hard Drawn	Minimum Ultimate Strength (pounds) 3/4 Hard	Minimum Ultimate Strength (pounds) Inter Temper
250000	157300	37	0.575	4860	3338	2946
300000	188800	37	0.629	5831	4005	3534
350000	220200	37	0.681	6680	4673	4123
400000	251500	37	0.728	7352	5341	4713
450000	283000	37	0.772	8110	6007	5301
500000	314500	37	0.813	9012	6675	5890
550000	346000	61	0.855	10490	7344	6480
600000	377000	61	0.893	11450	8010	7068
650000	409000	61	0.929	11940	8678	7657
700000	440000	61	0.964	12860	9346	8247
750000	472000	61	0.998	13510	10010	8835
800000	503000	61	1.031	14410	10680	9424
900000	566000	61	1.094	15900	12010	10600
1000000	629000	61	1.152	17670	13350	11780
1100000	692000	91	1.209	20210	14680	12950
1200000	755000	91	1.263	21630	16020	14130
1250000	786000	91	1.289	22530	16690	14720
1300000	818000	91	1.315	23430	17350	15310
1400000	880000	91	1.364	24750	18700	16500
1500000	943000	91	1.412	26500	20020	17670
1600000	1006000	127	1.459	28840	21360	18850
1700000	1069000	127	1.504	30630	22690	20020
1750000	1101000	127	1.526	31530	23350	20610
1800000	1132000	127	1.548	32450	24030	21210
1900000	1195000	127	1.590	33570	25360	22380
2000000	1258000	127	1.632	35340	26700	23560
2500000	1570000	127	1.824	43300	33380	29460
3000000	1890000	169	1.998	53010	40050	35340
3500000	2200000	169	2.158	60610	46730	41230

**CABLE DATA (continued)**

**ACSR**

Cable Code Word	Size (circular mils or AWG)	No. Alum Strands	No. Steel Strands	Complete Cable Dia. (inches)	Steel Core Dia. (inches)	Copper Equivalent based on equal D.C. resistance, Cu 97% Al 61%	Ultimate Strength (pounds)
Turkey	6	6	1	0.198	0.0661	8	1170
Thrush	5	6	1	0.223	0.0743	7	1460
Swan	4	6	1	0.250	0.0834	6	1830
Swanate	4	7	1	0.257	0.1029	6	2288
Swallow	3	6	1	0.281	0.0937	5	2250
Sparrow	2	6	1	0.316	0.1052	4	2790
Sparate	2	7	1	0.325	0.1299	4	3525
Robin	1	6	1	0.355	0.1182	3	3480
Raven	1/0	6	1	0.398	0.1327	2	4280
Quail	2/0	6	1	0.447	0.1490	1	5345
Pigeon	3/0	6	1	0.502	0.1672	1/0	6675
Penguin	4/0	6	1	0.563	0.1878	2/0	8420
Waxwing	266800	18	1	0.609	0.1217	3/0	7100
Owl	266800	26	7	0.633	0.2109	3/0	9645
Partridge	266800	26	7	0.642	0.2364	3/0	11250
Ostrich	300000	26	7	0.680	0.2505	188700	12650
Merlin	336400	18	1	0.684	0.1367	4/0	8950
Linnet	336400	26	7	0.721	0.2655	4/0	14050
Oriole	336400	30	7	0.741	0.3177	4/0	17040
Chickadee	397500	18	1	0.743	0.1486	250000	10400
Brant	397500	24	7	0.771	0.2575	250000	14690
Ibis	397500	26	7	0.783	0.2883	250000	16190
Lark	397500	30	7	0.806	0.3453	250000	19980
Pelican	477000	18	1	0.814	0.1628	300000	12300
Flicker	477000	24	7	0.846	0.2820	300000	17200
Hawk	477000	26	7	0.858	0.3162	300000	19430
Hen	477000	30	7	0.883	0.3783	300000	23300
Parakeet	556500	24	7	0.914	0.3045	350000	19850
Dove	556500	26	7	0.927	0.341	350000	22400
Eagle	556500	30	7	0.953	0.409	350000	27200
Peacock	605000	24	7	0.953	0.318	380500	21500
Squab	605000	26	7	0.966	0.356	380500	24100
Teal	605000	30	19	0.994	0.426	380500	30000
Rook	636000	24	7	0.977	0.326	400000	22600
Grosbeak	636000	26	7	0.990	0.365	400000	25000
Egret	636000	30	19	1.019	0.437	400000	31500
Flamingo	666600	24	7	1.000	0.333	419000	23700
Crow	715500	54	7	1.036	0.345	450000	26300
Starling	715500	26	7	1.051	0.387	450000	28100
Redwing	715500	30	19	1.081	0.463	450000	34600
Condor	795000	54	7	1.093	0.364	500000	28500

## CABLE DATA (continued)

### ACSR (continued)

Cable Code Word	Size (circular mils or AWG)	No. Alum Strands	No. Steel Strands	Complete Cable Dia. (inches)	Steel Core Dia. (inches)	Copper Equivalent based on equal D.C. resistance, Cu 97% Al 61%	Ultimate Strength (pounds)
Drake	795000	26	7	1.108	0.408	500000	31200
Mallard	795000	30	19	1.140	0.489	500000	38400
Crane	874500	54	7	1.146	0.382	550000	31400
Canary	900000	54	7	1.162	0.387	566000	32300
Cardinal	954000	54	7	1.196	0.399	600000	34200
Curlew	1033500	54	7	1.246	0.415	650000	37100
Finch	1113000	54	19	1.293	0.431	700000	40200
Pheasant	1272000	54	19	1.382	0.461	800000	44800
Plover	1431000	54	19	1.465	0.489	900000	50400
Falcon	1590000	54	19	1.545	0.515	100000	56000

### HIGH STRENGTH ACSR

Cable Code Word	Size (circular mils or AWG)	No. Alum Strands	No. Steel Strands	Complete Cable Dia. (inches)	Steel Core Dia. (inches)	Copper Equivalent based on equal D.C. resistance, Cu 97% Al 61%	Ultimate Strength (pounds)
Grouse	80000	8	1	0.367	0.1670	50310	5200
Petrel	101800	12	7	0.461	0.2763	64160	9860
Minorca	110800	12	7	0.481	0.2883	69700	10730
Leghorn	134600	12	7	0.530	0.3177	84600	12920
Guinea	159000	12	7	0.576	0.3453	100000	15200
Dotterel	176900	12	7	0.607	0.3642	111200	16440
Dorking	190800	12	7	0.631	0.3783	120000	17730
Cochin	211300	12	7	0.663	0.3981	132900	19640
Brahma	203200	16	9	0.714	0.4885	127800	27500

**CABLE DATA (continued)**

**COMPACT ALUMINUM 1350 CABLE (ASTM B400) EXTRA HARD**

Conductor Size		Class	No. of Wires	Cable Diameter (Inches)	Breaking Strength (pounds)
kcmil	AWG				
1000		B	61 <sup>1</sup>	1.060	17700
900		B	61 <sup>1</sup>	0.999	15900
800		B	61 <sup>1</sup>	0.938	14400
750		B	61 <sup>1</sup>	0.908	13500
700		B	61 <sup>1</sup>	0.877	12900
650		B	61 <sup>1</sup>	0.845	11900
600		B	61 <sup>1</sup>	0.813	11500
556		AA	19 <sup>3</sup>	0.780	9750
550		B	61 <sup>1</sup>	0.775	10500
500		B	37 <sup>2</sup>	0.736	9110
500		AA	19 <sup>3</sup>	0.736	8760
477		AA	19 <sup>3</sup>	0.722	8360
450		B	37 <sup>2</sup>	0.700	8200
400		B	37 <sup>2</sup>	0.659	7440
397		AA, A	19 <sup>3</sup>	0.659	7110
350		B	37 <sup>2</sup>	0.616	6760
350		A	19 <sup>3</sup>	0.616	6390
336		A	19 <sup>3</sup>	0.603	6150
336		AA	7	0.603	5960
300		B	37 <sup>2</sup>	0.570	5890
300		A	19 <sup>3</sup>	0.570	5480
300		AA	7	0.570	5430
266		A	19 <sup>3</sup>	0.537	4970
266		AA	7	0.537	4830
250		B	37 <sup>2</sup>	0.520	4910
250		A	19 <sup>3</sup>	0.520	4660
250		AA	7	0.520	4520
	4/0	B	19 <sup>3</sup>	0.475	4020
	4/0	AA, A	7	0.475	3830
	3/0	B	19 <sup>3</sup>	0.423	3310
	3/0	AA, A	7	0.423	3040
	2/0	B	19 <sup>3</sup>	0.376	2670
	2/0	AA, A	7	0.376	2510
	1/0	B	19 <sup>3</sup>	0.336	2160
	1/0	AA, A	7	0.336	1990
	1	B	19 <sup>3</sup>	0.299	1740
	1	AA, A	7	0.299	1640
	2	AA, A, B	7	0.268	1350
	3	A, B	7	0.238	1090
	4	A, B	7	0.213	.881
	6	A, B	7	0.169	.563
	8	A, B	7	0.134	.312

<sup>1</sup> 58 Wires Minimum  
<sup>2</sup> 35 Wires Minimum  
<sup>3</sup> 18 Wires Minimum

## CABLE DATA (continued)

## ALUMINUM ALLOY 5005 CABLE (ASTM B397)

Conductor Size cmil	Number of Wires	Approx. Aluminum 1350 Size having Equivalent Resistance		Size & Stranding of ACSR with Equal Diameter			Rated Strength (pounds)
		cmil	AWG	cmil	AWG	Stranding	
927200	37	795000	-	795000	-	26/7	23900
740800	37	636000	-	636000	-	26/7	19300
652400	19	556500	-	556500	-	26/7	16200
587200	19	506500	-	506500	-	18/1	14600
559500	19	477000	-	477000	-	26/7	13900
503600	19	435500	-	435500	-	18/1	12500
465400	19	397500	-	397500	-	26/7	12200
419400	19	362000	-	362000	-	18/1	11200
394500	19	336400	-	336400	-	26/7	10500
355100	19	306400	-	306400	-	18/1	9600
312800	19	266800	-	266800	-	26/7	8450
281400	19	242900	-	242900	-	18/1	7610
246900	7	211600	4/0	211600	4/0	6/1	6330
195700	7	167800	3/0	167800	3/0	6/1	5020
155400	7	133100	2/0	133100	2/0	6/1	4280
123300	7	105600	1/0	105600	1/0	6/1	3440
77470	7	66360	2	66360	2	6/1	2200
48690	7	41740	4	41740	4	6/1	1430
30580	7	26240	6	26240	6	6/1	922

## ALUMINUM ALLOY 6201 CABLE (ASTM B399)

Conductor Size cmil	Number of Wires	Approx. Aluminum 1350 Size having Equivalent Resistance		Size & Stranding of ACSR with Equal Diameter			Rated Strength (pounds)
		cmil	AWG	cmil	AWG	Stranding	
1439200	61	1272000	-	1272000	-	54/7	46800
1348800	61	1192500	-	1192500	-	54/7	43900
1259600	61	1113000	-	1113000	-	54/7	41000
1165100	61	1033500	-	1033500	-	54/7	37900
1077400	61	954000	-	954000	-	54/7	35000
927200	37	795000	-	795000	-	26/7	30500
740800	37	636000	-	636000	-	26/7	24400
652400	19	556500	-	556500	-	26/7	21900
559500	19	477000	-	477000	-	26/7	18800
465400	19	397500	-	397500	-	26/7	15600
394500	19	336400	-	336400	-	26/7	13300
312800	19	266800	-	266800	-	26/7	11000
246900	7	211600	4/0	211600	4/0	6/1	8560
195700	7	167800	3/0	167800	3/0	6/1	6790
155400	7	133100	2/0	133100	2/0	6/1	5390
123300	7	105600	1/0	105600	1/0	6/1	4460
77470	7	66360	2	66360	2	6/1	2800
48690	7	41740	4	41740	4	6/1	1760
30580	7	26240	6	26240	6	6/1	1110

**CABLE DATA (continued)**

**ALUMINUM ALLOY 8000 SERIES “O” TEMPER CABLE ASTM B801)**

Conductor Size		Number of Wires†	Class	Conductor Diameter (inches)			Min. Breaking Strength (pounds)
kcmil	AWG			Conventional	Compressed	Compact	
1000		127	D	1.153	1.119	1.060	6010
1000		91	C	1.153	1.118	1.060	6010
1000		61	B, A	1.152	1.117	1.060	6010
900		127	D	1.095	1.062	0.999	5400
900		91	C	1.093	1.060	0.999	5400
900		61	B, A	1.093	1.060	0.999	5400
800		127	D	1.032	1.001	0.938	4800
800		91	C	1.032	1.001	0.938	4800
800		61	B, A	1.031	1.000	0.938	4800
750		127	D	0.998	0.968	0.908	4500
750		91	C	0.999	0.969	0.908	4500
750		61	B, A	0.998	0.938	0.908	4500
700		127	D	0.965	0.936	0.877	4200
700		91	C	0.965	0.936	0.877	4200
700		61	B, A	0.964	0.935	0.877	4200
650		127	D	0.930	0.902	0.845	3900
650		91	C	0.930	0.902	0.845	3900
650		61	B	0.929	0.901	0.845	3900
650		37	A	0.928	0.900	0.845	3950
600		127	D	0.893	0.866	0.813	3600
600		91	C	0.893	0.866	0.813	3600
600		61	B	0.893	0.866	0.813	3600
600		37	A	0.891	0.864	0.813	3640
556		127	D	0.861	0.835	0.780	3340
556		91	C	0.860	0.834	0.780	3340
556		61	B	0.860	0.834	0.780	3340
556		37	A	0.858	0.832	0.780	3380
550		127	D	0.855	0.829	0.775	3300
550		91	C	0.855	0.829	0.775	3300
550		61	B	0.855	0.829	0.775	3300
550		37	A	0.853	0.827	0.775	3340
500		91	D	0.815	0.791	0.736	3000
500		61	C	0.815	0.791	0.736	3000
500		37	B, A	0.813	0.789	0.736	3040
477		91	D	0.796	0.772	0.722	2860
477		61	C	0.796	0.772	0.722	2860
477		37	B, A	0.795	0.771	0.722	2900
450		91	D	0.773	0.750	0.700	2700
450		61	C	0.773	0.750	0.700	2700
450		37	B, A	0.772	0.749	0.700	2730

## CABLE DATA (continued)

## ALUMINUM ALLOY 8000 SERIES "O" TEMPER CABLE (ASTM B801) Continued

Conductor Size		Number of Wires†	Class	Conductor Diameter (inches)			Min. Breaking Strength (pounds)
kcmil	AWG			Conventional	Compressed	Compact	
400		91	D	0.729	0.707	0.659	2400
400		61	C	0.729	0.707	0.659	2400
400		37	B, A	0.728	0.706	0.659	2430
397		91	D	0.727	0.705	0.659	2390
397		61	C	0.726	0.704	0.659	2390
397		37	B	0.725	0.703	0.659	2410
397		19	A	0.724	0.702	0.659	2470
350		91	D	0.682	0.661	0.616	2100
350		61	C	0.681	0.661	0.616	2100
350		37	B	0.681	0.661	0.616	2130
350		19	A	0.679	0.659	0.616	2170
336		61	C	0.669	0.649	0.603	2020
336		37	B	0.668	0.648	0.603	2040
336		19	A	0.666	0.646	0.603	2090
300		61	C	0.631	0.612	0.570	1800
300		37	B	0.630	0.611	0.570	1820
300		19	A	0.629	0.610	0.576	1860
266		61	C	0.595	0.577	0.537	1600
266		37	B	0.594	0.576	0.537	1620
266		19	A	0.593	0.575	0.537	1660
250		61	C	0.576	0.559	0.520	1500
250		37	B	0.575	0.558	0.520	1520
250		19	A	0.574	0.557	0.520	1550
	4/0	37	C	0.529	0.513	0.475	1280
	4/0	19	B	0.528	0.512	0.475	1310
	4/0	7	A	0.522	0.506	0.475	1360
	3/0	37	C	0.471	0.457	0.423	1020
	3/0	19	B	0.470	0.456	0.423	1040
	3/0	7	A	0.464	0.450	0.423	1070
	2/0	19	B	0.419	0.406	0.376	826
	2/0	7	A	0.414	0.402	0.376	853
	1/0	19	B	0.373	0.362	0.336	655
	1/0	7	A	0.368	0.357	0.336	676
	1	19	B	0.332	0.322	0.229	519
	2	7	B, A	0.292	0.283	0.268	425
	3	7	B, A	0.260	0.252	0.238	337
	4	7	B, A	0.232	0.225	0.213	267
	6	7	B, A	0.184	0.178	0.169	168
	8	7	B, A	0.146	0.142	0.134	106

† For compact-stranded constructions, the number of wires may be reduced as follows:

19-Wire Constructions - 18 Wires Minimum

37-Wire Constructions - 35 Wires Minimum

61-Wire Constructions - 58 Wires Minimum

91-Wire Constructions - 87 Wires Minimum

127-Wire Constructions - 122 Wires Minimum



**CABLE DATA (continued)**

**COMPACT ACSR (ASTM B401)**

Conductor Size		Cable Diameter (Inches)	Breaking Strength (pounds)
kcmil	AWG		
336.4		0.628	8260
266.8		0.559	6540
	4/0	0.517	7420
	3/0	0.461	5880
	2/0	0.410	4880
	1/0	0.365	3980
	1	0.326	3290
	2	0.298	3260
	2	0.290	2640
	3	0.258	2130
	4	0.236	2160
	4	0.229	1760
	6	0.182	1120

**ACSR/TW (TRAP WIRE) CABLE (ASTM B779)**

Conductor Size kcmil	Stranding		Nominal Diameter (inches)	Rated Strength (pounds)
	No. Aluminum Wires	No. Steel Wires		
336.4	14	1	0.63	8600
405.1	14	1	0.68	10200
477.0	18	7	0.78	17200
477.0	18	7	0.79	19400
556.5	18	7	0.84	20000
556.5	20	7	0.85	22600
565.3	20	7	0.86	22900
571.7	18	7	0.85	20600
636.0	27	1	0.85	13500
636.0	18	7	0.89	22900
636.0	20	7	0.91	25400
664.8	20	7	0.93	26600
666.6	20	7	0.91	24000
762.8	20	7	0.99	30500
768.2	20	7	0.98	27700
768.9	27	1	0.93	16400
795.0	17	7	0.96	21000
795.0	18	7	0.98	25900
795.0	20	7	0.99	28200
795.0	20	7	1.01	31800
946.7	35	7	1.08	29600
954.0	30	7	1.05	23700

Conductor Size kcmil	Stranding		Nominal Diameter (inches)	Rated Strength (pounds)
	No. Aluminum Wires	No. Steel Wires		
954.0	32	7	1.06	25900
954.0	20	7	1.08	33500
957.2	32	7	1.06	26000
959.6	22	7	1.11	37000
966.2	21	7	1.09	34000
1033.5	30	7	1.09	25700
1033.5	32	7	1.10	28100
1033.5	21	7	1.13	36300
1113.0	30	7	1.13	27500
1113.0	33	7	1.14	30000
1113.0	38	19	1.19	39100
1158.0	33	7	1.17	31600
1158.4	25	7	1.20	39600
1168.1	30	7	1.16	28900
1192.5	30	7	1.17	29500
1192.5	33	7	1.18	32400
1192.5	38	19	1.22	41900
1233.6	38	19	1.25	42900
1257.1	35	7	1.21	34200
1272.0	30	7	1.20	31400
1272.0	35	7	1.22	34600
1272.0	39	19	1.26	44100

## CABLE DATA (continued)

## ACSR/TW (TRAP WIRE) Continued

Conductor Size kcmil	Stranding		Nominal Diameter (inches)	Rated Strength (pounds)
	No. Aluminum Wires	No. Steel Wires		
1334.6	39	19	1.29	46300
1351.5	35	7	1.26	36700
1351.4	39	19	1.30	46800
1359.7	36	7	1.26	36900
1372.5	30	7	1.25	33400
1431.0	36	7	1.29	38900
1431.0	39	19	1.34	49600
1433.6	39	19	1.34	49700
1455.3	36	7	1.30	39200
1467.8	33	7	1.29	35800
1533.3	39	19	1.38	53200
1557.4	36	7	1.35	41900
1569.0	33	7	1.33	38200

Conductor Size kcmil	Stranding		Nominal Diameter (inches)	Rated Strength (pounds)
	No. Aluminum Wires	No. Steel Wires		
1590.0	36	7	1.36	42200
1590.0	42	19	1.41	55100
1622.0	39	19	1.42	57500
1657.4	36	7	1.39	44000
1730.6	39	19	1.47	59400
1758.6	37	19	1.47	34600
1780.0	37	19	1.45	50700
1926.9	42	19	1.55	65300
1949.6	42	7	1.50	51900
2153.8	64	19	1.60	61100
2156.0	64	19	1.61	61100
2627.3	64	19	1.76	74500

## AAC/TW (ALL ALUMINUM TRAP WIRE) (ASTM B778)

Conductor Size kcmil	Nominal Diameter (inches)	Number of Wires	Rated Strength (pounds)
336.4	0.612	17	6220
397.5	0.661	17	7230
477.0	0.720	17	8530
500.0	0.736	17	8940
556.5	0.775	17	9950
600.0	0.803	17	10700
636.0	0.825	17	11400
700.0	0.864	17	12500
750.0	0.893	17	13400
795.0	0.919	17	13900
900.0	0.990	31	15800
954.0	1.018	31	16700
1000.0	1.041	31	17500
1033.5	1.057	31	18100
1113.0	1.095	31	19500
1192.5	1.132	31	20900
1272.0	1.168	31	22300
1351.5	1.202	31	23700
1431.0	1.236	31	24600
1590.0	1.315	49	27300
1750.0	1.377	49	30000
2000.0	1.468	49	34300

CABLE DATA (continued)

ACAR CABLE (ASTM B524)

Conductor Size		Number of Wires	Nominal Outside Diameter (inches)
kcmil	AWG		
2000		91	1.630
2000		61	1.630
1900		61	1.588
1800		61	1.546
1750		61	1.525
1700		61	1.502
1600		61	1.458
1500		61	1.411
1400		61	1.364
1300		61	1.314
1300		37	1.312
1250		61	1.288
1250		37	1.287
1200		61	1.263
1200		37	1.261
1100		61	1.209
1100		37	1.207
1000		61	1.152
1000		37	1.151
950		37	1.121
900		37	1.092
850		37	1.061
800		37	1.029
750		37	0.997
700		37	0.962
650		37	0.928
600		37	0.891
600		19	0.888
550		37	0.853
550		19	0.850
500		37	0.813
500		19	0.811
450		19	0.770
400		19	0.726
350		19	0.678
300		19	0.628
250		19	0.574
246.9		7	0.563

Conductor Size		Number of Wires	Nominal Outside Diameter (inches)
kcmil	AWG		
	4/0	7	0.522
195.7		7	0.502
	3/0	7	0.464
155.4		7	0.447
	2/0	7	0.414
123.3		7	0.398
	1/0	7	0.368
77.4		7	0.316
	2	7	0.292
48.6		7	0.250
	4	7	0.232
30.5		7	0.198

SSAC CABLE

Size AWG or kcmil	# Alum Strands	# Steel Strands	Conductor Diameter	Rated Strength (pounds)
266.8	22	7	.622	6030
266.8	24	7	.633	7410
266.8	26	7	.642	8880
266.8	30	7	.660	11700
300.0	26	7	.680	9970
336.4	20	7	.692	5990
336.4	22	7	.701	7610
336.4	24	7	.710	9340
336.4	26	7	.720	11200
336.4	30	7	.741	14800
397.5	20	7	.752	7090
397.5	22	7	.762	8990
397.5	24	7	.772	11000
397.5	26	7	.783	13000
397.5	30	7	.806	17500
477.0	20	7	.823	8490
477.0	22	7	.834	10800
477.0	24	7	.846	13000
477.0	26	7	.858	15600
477.0	30	7	.883	21000
500.0	30	7	.904	22000

## CABLE DATA (continued)

## SSAC CABLE (Continued)

Size AWG or kcmil	# Alum Strands	# Steel Strands	Conductor Diameter	Rated Strength (pounds)
556.5	20	7	.890	9910
556.5	22	7	.901	12600
556.5	24	7	.914	15200
556.5	26	7	.927	18200
556.5	30	7	.953	24500
605.0	24	7	.953	16500
605.0	26	7	.966	19700
605.0	30	7	.994	26000
605.0	30	19	.994	26600
636.0	20	7	.951	11300
636.0	22	7	.963	14100
636.0	24	7	.977	17300
636.0	26	7	.990	20700
636.0	30	7	1.019	27400
636.0	30	19	1.019	28000
666.6	24	7	1.000	18200
666.6	26	7	1.104	21700
715.5	24	7	1.036	19500
715.5	26	7	1.051	23300
715.5	30	19	1.081	30800
795.0	42	7	1.055	11800
795.0	20	7	1.063	14200
795.0	45	7	1.063	14200
795.0	22	7	1.077	17700
795.0	24	7	1.092	21700
795.0	54	7	1.092	21700
795.0	26	7	1.108	25900
795.0	30	19	1.140	34300
900.0	45	7	1.131	15800
900.0	54	7	1.162	24600
954.0	42	7	1.155	14200
954.0	20	7	1.185	16700
954.0	45	7	1.165	16700
954.0	48	7	1.175	19700
954.0	24	7	1.196	26000
954.0	54	7	1.196	26000
954.0	30	19	1.248	41100
1033.5	42	7	1.203	15400

Size AWG or kcmil	# Alum Strands	# Steel Strands	Conductor Diameter	Rated Strength (pounds)
1033.5	45	7	1.212	18100
1033.5	48	7	1.222	21300
1033.5	54	7	1.245	28200
1113.0	42	7	1.248	16300
1113.0	45	7	1.259	19500
1113.0	48	7	1.269	23000
1113.0	54	19	1.293	30400
1192.5	42	7	1.292	17500
1192.5	45	7	1.302	20900
1192.5	48	7	1.313	24600
1192.5	54	19	1.338	32600
1272.0	42	7	1.334	18700
1272.0	45	7	1.345	22300
1272.0	48	7	1.357	26200
1272.0	54	19	1.382	34100
1351.5	42	7	1.376	19900
1351.5	45	7	1.386	23700
1351.5	48	7	1.398	27900
1351.5	54	19	1.424	36200
1431.0	42	7	1.415	21000
1431.0	45	7	1.427	25100
1431.0	48	7	1.439	29500
1431.0	54	19	1.465	38400
1510.5	45	7	1.466	26500
1510.5	54	19	1.505	40500
1590.0	42	7	1.492	23400
1590.0	45	7	1.504	27900
1590.0	48	7	1.517	32200
1590.0	54	19	1.545	42600
1780.0	84	19	1.602	35400
1869.0	68	7	1.603	21500
2034.5	72	7	1.681	27200

**CABLE DATA (continued)**

**SOLID COPPERWELD CABLE (ASTM B227)**

Conductor Size (AWG)	Nominal Diameter (inches)	Circular Mils	Minimum Breaking Load (pounds)			
			Grade 40 HS	Grade 40 EHS	Grade 30 HS	Grade 30 EHS
4	0.2043	41740	3540	-	3934	4671
5	0.1819	33090	2937	-	3249	3911
-	0.1650*	27230	2779	-	2779	3367
6	0.1620	26240	2679	-	2679	3246
7	0.1443	20820	2207	-	2207	2681
8	0.1285	16510	1816	-	1816	2205
-	0.1280*	16380	1802	-	1802	2188
9	0.1144	13090	1491	-	1491	1790
-	0.1040*	10820	1283	1325	1283	1487
10	0.1019	10380	1231	-	1231	1460
12	0.0808	6530	774	-	774	918
-	0.0800*	6400	759	-	759	900
-	0.0640*	4096	485	-	485	576
18	0.0403	1624	193	-	193	228
-	0.0390*	1521	180	-	180	214
20	0.0320	1024	121	-	121	144

\* These diameters are often employed by purchasers for communication lines BUT are not in the American Wire Gauge (B&S Wire Gauge) series, as are the other diameter listed.

**STRANDED COPPERWELD CABLE (ASTM B228)**

Nominal Diameter† (inch) Size AWG‡	Circular Mils	Diameter* (inch)	Breaking Load (pounds)**		
			High Strength		Extra High Strength
			40% Cond.	30% Cond.	30% Cond.
7/8 (19 No. 5)	628900	.910	50240	55570	66910
13/16 (19 No. 6)	498800	.810	41600	45830	55530
23/32 (19 No. 7)	395500	.721	34390	37740	45850
27/32 (19 No. 8)	313700	.642	28380	31040	37690
9/16 (19 No. 9)	248800	.572	23390	25500	30610
5/8 (7 No. 4)	292200	.613	22310	24780	29430
9/16 (7 No. 5)	231700	.546	18510	20470	24650
1/2 (7 No. 6)	183800	.486	15330	16890	20460
7/16 (7 No. 7)	145700	.433	12670	13910	16890
3/8 (7 No. 8)	115600	.385	10460	11440	13890
11/32 (7 No. 9)	91650	.343	8616	9393	11280
5/16 (7 No. 10)	72680	.306	7121	7758	9196
3 No. 5	99310	.392	8373	9262	11860
3 No. 6	78750	.349	6934	7639	9754
3 No. 7	62450	.311	5732	6291	7922
3 No. 8	49530	.277	4730	5174	6282
3 No. 9	39280	.247	3898	4250	5129
3 No. 10	31150	.220	3221	3509	4160
3 No. 12	19590	.174	2236	-	-


† The designation "inch" is the approximate diameter in proper fraction of an inch.  
 ‡ The designation AWG is a combination of the number of wires each of the American Wire Gauge size indicated by "No."  
 \* Diameter of circumscribing.  
 \*\* Breaking loads of 7-wire and 19-wire conductors are taken as 90% of the sum of the breaking loads of individual wires; breaking load of 3-wire conductors is taken as 95% of the sum of the breaking loads of the individual wires.

CABLE DATA (continued)

COPPERWELD-COPPER CABLE (ASTM B229)

Conductor size Hard Drawn Copper Equivalent			Nom. Dia. of Conductor (inches)	Min. Breaking Load (pounds)
cmil	AWG	Type		
350000	-	E	0.788	32420
350000	-	EK	0.735	23850
350000	-	V	0.754	23480
300000	-	E	0.729	27770
300000	-	EK	0.680	20960
300000	211600	V	0.698	20730
250000	-	E	0.666	23920
250000	-	EK	0.621	17840
250000	-	V	0.637	17420
	4/0	E	0.613	20730
211600	4/0	G	0.583	15640
211600	4/0	EK	0.571	15370
211600	4/0	V	0.586	15000
211600	4/0	F	0.550	12290
167800	3/0	E	0.545	16800
167800	3/0	J	0.555	16170
167800	3/0	G	0.519	12860
167800	3/0	EK	0.509	12370
167800	3/0	V	0.522	12200
167800	3/0	F	0.490	9980
133100	2/0	K	0.534	17600
133100	2/0	J	0.494	13430
133100	2/0	G	0.463	10510
133100	2/0	V	0.465	9846
133100	2/0	F	0.436	8094
105600	1/0	K	0.475	14490
105600	1/0	J	0.440	10970
105600	1/0	G	0.412	8563
105600	1/0	F	0.388	6536
83690	1	N	0.464	15410
83690	1	K	0.423	11900
83690	1	J	0.392	9000
83690	1	G	0.367	6956
83690	1	F	0.346	5266
66360	2	P	0.462	16870
66360	2	N	0.413	12680
66360	2	K	0.377	9730
66360	2	J	0.349	7322
66360	2	A	0.366	5876
66360	2	G	0.327	5626
66360	2	F	0.308	4233
55620	3	P	0.411	13910
52620	3	N	0.368	10390

Conductor size Hard Drawn Copper Equivalent			Nom. Dia. of Conductor (inches)	Min. Breaking Load (pounds)
cmil	AWG	Type		
52620	3	K	0.336	7910
52620	3	J	0.311	5955
52620	3	A	0.326	4810
41740	4	P	0.366	11420
41740	4	N	0.328	8460
41740	4	D	0.348	7340
41740	4	A	0.290	3938
33090	5	P	0.326	9311
33090	5	D	0.310	6035
33090	5	A	0.258	3193
26240	6	D	0.276	4942
26240	6	A	0.230	2585
26240	6	C	0.225	2143
20820	7	D	0.246	4022
20820	7	A	0.223	2754
16510	8	D	0.219	3256
16510	8	A	0.199	2233
16510	8	C	0.179	1362
11750	9	D	0.174	1743

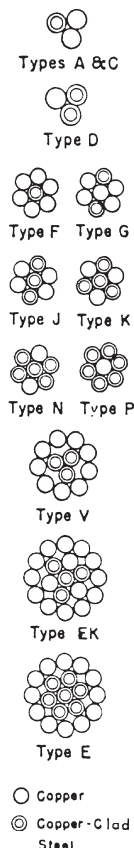

**CABLE DATA (continued)**

**GALVANIZED STEEL CABLE (ASTM A475)**

inches	Nom. Dia. of Strand (mm)	Number of Wires in Strand	Minimum Breaking Load (pounds)				
			Utilities Grade	Common Grade	Siemens-Martin Grade	High-Strength Grade	Extra High-Strength Grade
1/8	3.18	7	-	540	910	1330	1830
5/32	3.97	7	-	870	1470	2140	2940
3/16	4.76	7	-	1150	1900	2850	3990
3/16	4.76	7	2400	-	-	-	-
7/32	5.56	3	-	1400	2340	3500	4900
7/32	5.56	7	-	1540	2560	3850	5400
1/4	6.35	3	3150	1860	3040	4730	6740
1/4	6.35	3	4500	-	-	-	-
1/4	6.35	7	-	1900	3150	4750	6650
9/32	7.14	3	-	2080	3380	5260	7500
9/32	7.14	7	4600	2570	4250	6400	8950
5/16	7.94	3	6500	2490	4090	6350	9100
5/16	7.94	7	-	3200	5350	8000	11200
5/16	7.94	7	6000	-	-	-	-
3/8	9.52	3	8500	3330	5560	8360	11800
3/8	9.52	7	11500	4250	6950	10800	15400
7/16	11.11	7	18000	5700	9350	14500	20800
1/2	12.70	7	25000	7400	12100	18800	26900
1/2	12.70	19	-	7620	12700	19100	26700
9/16	14.29	7	-	9600	15700	24500	35000
9/16	14.29	19	-	9640	16100	24100	33700
5/8	15.88	7	-	11600	19100	29600	42400
5/8	15.88	19	-	11000	18100	28100	40200
3/4	19.05	19	-	16000	26200	40800	58300
7/8	22.22	19	-	21900	35900	55800	79700
1	25.40	9	-	28700	47000	73200	104500
1	25.40	37	-	28300	46200	71900	102700
1-1/8	28.58	37	-	36000	58900	91600	130800
1-1/4	31.75	37	-	44600	73000	113600	162200





















CABLE DATA (continued)

ALUMINUM-COATED STEEL CABLE (ASTM A474)

Nom. Dia. of Strand (inches)	Number of Wires in Strand	Minimum Breaking Strength (pounds)				
		Utilities Grade*	Common Grade	Siemens-Martin Grade	High-Strength Grade	Extra High-Strength Grade
3/16	7		1150	1900	2850	
3/16	7	2400				
1/4	3	3150				
1/4	3	4500				
1/4	7		1900	3150	4750	6650
9/32	7	4600				
5/16	3	6500				
5/16	7		3200	5350	8000	11200
5/16	7	6000				
3/8	3	8500				
3/8	7	11500	4250	6950	10800	15400
7/16	7	18000	5350	9350	14500	20800
1/2	7	25000	7400	12100	18800	26900

\* The Utilities Grade is used principally by communications and power and light industries.

TERMINAL STUD SIZE CHART\*

STUD SIZE	#0	#1	#2	#3	#4	#5	#6	#8	#10	#12	#14	1/4"	5/16"	3/8"
Stud Diameter	.060	.073	.086	.090	.112	.125	.138	.164	.190	.216	.242	.250	.312	.375
														
Stud Hole	.067	.093	.119			.145	.171	.197	.223	.250	17/64	21/64	25/64	
STUD SIZE	7/16"		1/2"		5/8"		3/4"		7/8"		1"			
Stud Diameter	.437		.500		.625		.750		.875		1.000			
														
Stud Hole	29/64		33/64		21/32		29/32		29/32		1 - 1/32			

\*Tolerance .003" on decimal and .005" on fractional dimensions



**AWG VS. METRIC WIRE SIZES**

Circ. Mils	Equivalent Circ. Mils	AWG Size	Metric Wire Size (mm)	Number of Strands	Wire Dia. per Strand		Approx. Overall Diameter	
					inches	mm	inches	mm
-	937	-	.50	1	.032	.813	.032	.81
1020	-	20	-	7	.0121	.307	.036	.91
-	1480	-	.75	1	.039	.091	.039	.99
1620	-	18	-	1	.0103	1.02	.040	1.02
1620	-	18	-	7	.0152	.386	.046	1.16
-	1974	-	1.0	1	.045	1.14	.045	1.14
-	1974	-	1.0	7	.017	.422	.061	1.30
2580	-	16	-	1	.0503	1.29	.051	1.29
2580	-	16	-	7	.0192	.468	.058	1.46
-	2960	-	1.5	1	.055	1.40	.055	1.40
-	2960	-	1.5	7	.021	5.33	.063	1.60
4110	-	14	-	1	.0641	1.63	.064	1.63
4110	-	14	-	7	.0242	.615	.073	1.84
-	4934	-	2.5	1	.071	1.80	.071	1.80
-	4934	-	2.5	7	.027	6.66	.081	2.06
6530	-	12	-	1	.0308	2.05	.081	2.05
6530	-	12	-	7	.0305	.775	.092	2.32
-	7894	-	4	1	.089	2.26	.089	2.26
-	7894	-	4	7	.034	.864	.102	2.59
10380	-	10	-	1	.1019	2.59	.102	2.59
10380	-	10	-	7	.0355	.978	.116	2.93
-	11840	-	6	1	.109	2.77	.109	2.77
-	11840	-	6	7	.042	.107	.126	3.21
13000	-	9	-	1	.1144	2.91	.114	2.91
13090	-	9	-	7	.0432	1.10	.130	3.30
16510	-	8	-	1	.1285	3.26	.128	3.25
16510	-	8	-	7	.0486	1.23	.146	3.70
-	19740	-	10	1	.141	3.58	.141	3.58
-	19740	-	10	7	.054	1.37	.162	4.12
20520	-	7	-	1	.1443	3.67	.144	3.67
20520	-	7	-	7	.0545	1.38	.164	4.15
26240	-	6	-	1	.162	4.11	.162	4.11
26240	-	6	-	7	.0612	1.55	.184	4.66
-	31580	-	16	7	.008	1.73	.204	5.13
33090	-	5	-	7	.0688	1.75	.206	5.24
41740	-	4	-	7	.0772	1.96	.232	5.88
-	49340	-	25	7	.085	2.16	.255	6.48
-	49340	-	25	19	.052	1.32	.260	6.60
52620	-	3	-	7	.0867	2.20	.260	6.61
66300	-	2	-	7	.0974	2.47	.292	7.42
-	69070	-	35	7	.100	2.54	.300	7.62
-	69070	-	35	19	.001	1.55	.305	7.75

## AWG VS. METRIC WIRE SIZES (continued)

Circ. Mils	Equivalent Circ. Mils	AWG Size	Metric Wire Size (mm)	Number of Strands	Wire Dia. per Strand		Approx. Overall Diameter	
					inches	mm	inches	mm
83690	-	1	-	19	.0064	1.50	.332	8.43
-	98680	-	50	19	.073	1.85	.365	9.27
105000	-	1/0	-	19	.0745	1.59	.373	9.46
133100	-	2/0	-	19	.0837	2.13	.419	10.6
-	138100	-	70	19	.086	2.18	.430	10.9
167800	-	3/0	-	19	.094	2.59	.470	11.9
167800	-	3/0	-	36	.0673	1.71	.471	12.0
-	187500	-	95	19	.101	2.57	.505	12.8
-	187500	-	95	37	.072	1.83	.504	12.5
211600	-	4/0	-	19	.1055	2.89	.528	13.4
-	237.8 kcmil	-	120	37	.081	2.06	.567	14.4
250 kcmil	-	-	-	37	.0822	2.07	.575	14.6
300 kcmil	-	-	150	37	.090	2.29	.630	16.0
350 kcmil	-	-	-	37	.0973	2.47	.681	17.3
-	365.1 kcmil	-	185	37	.100	2.54	.700	17.8
400 kcmil	-	-	-	37	.104	2.64	.728	18.5
-	473.6 kcmil	-	240	37	.114	2.90	.798	20.3
-	473.6 kcmil	-	240	61	.089	2.26	.801	20.3
500 kcmil	-	-	-	37	.1162	2.95	.813	20.7
500 kcmil	-	-	-	61	.0905	2.30	.814	20.7
-	592.1 kcmil	-	300	61	.099	2.51	.891	22.6
600 kcmil	-	-	-	61	.0992	2.52	.893	22.7
700 kcmil	-	-	-	61	.1071	2.72	.964	24.5
750 kcmil	-	-	-	6	.1109	2.82	.998	25.4
750 kcmil	-	-	-	91	.0908	2.31	.998	25.4
-	789.4 kcmil	-	400	61	.114	2.90	1.026	26.1
800 kcmil	-	-	-	61	.1145	2.91	1.031	26.2
800 kcmil	-	-	-	91	.0938	2.38	1.032	26.2
1000 kcmil	986.8 kcmil	-	500	61	.1280	3.25	1.152	28.3
1000 kcmil	-	-	-	91	.1048	2.66	1.153	29.3
-	1233.7 kcmil	-	625	91	.117	2.97	1.287	32.7
1250 kcmil	-	-	-	91	.1172	2.93	1.289	32.7
1250 kcmil	-	-	-	127	.0992	2.52	1.200	32.8
1500 kcmil	-	-	-	91	.1284	3.26	1.412	36.9
1500 kcmil	-	-	-	127	.1087	2.76	1.413	36.9
-	1578.8 kcmil	-	800	91	.132	3.35	1.452	36.9
-	1973.5 kcmil	-	1000	91	.147	3.73	1.617	41.1
2000 kcmil	-	-	-	127	.1255	3.19	1.632	41.5
2000 kcmil	-	-	-	169	.1088	2.76	1.632	41.5

INCHES & MILLIMETERS CONVERSION CHART

INCHES		MM	INCHES		MM	MM	INCHES	MM	INCHES
$\frac{1}{64}$	.015625	0.397	$\frac{33}{64}$	.515625	13.097	.1	.0039	46	1.8110
$\frac{1}{32}$	.03125	0.794	$\frac{17}{32}$	.53125	13.494	.2	.0079	47	1.8504
$\frac{3}{64}$	.046875	1.191	$\frac{35}{64}$	.546875	13.891	.3	.0118	48	1.8898
$\frac{1}{16}$	.0625	1.588	$\frac{9}{16}$	.5625	14.288	.4	.0157	48	1.9291
$\frac{5}{64}$	.078125	1.984	$\frac{37}{64}$	.578125	14.684	.5	.0197	50	1.9685
$\frac{3}{32}$	.09375	2.381	$\frac{19}{32}$	.59375	15.081	.6	.0236	51	2.0079
$\frac{7}{64}$	.109375	2.778	$\frac{39}{64}$	.609375	15.478	.7	.0276	52	2.0472
$\frac{1}{8}$	.1250	3.175	$\frac{5}{8}$	.6250	15.875	.8	.0315	53	2.0866
$\frac{9}{64}$	.140625	3.572	$\frac{41}{64}$	.640625	16.272	.9	.0354	54	2.1260
$\frac{5}{32}$	.15625	3.969	$\frac{21}{32}$	.65625	16.669	1	.0394	55	2.1654
$\frac{11}{64}$	.171875	4.366	$\frac{43}{64}$	.671875	17.066	2	.0787	56	2.2047
$\frac{3}{16}$	.1875	4.763	$\frac{11}{16}$	.6875	17.463	3	.1181	57	2.2441
$\frac{13}{64}$	.203125	5.159	$\frac{45}{64}$	.703125	17.859	4	.1575	58	2.2835
$\frac{7}{32}$	.21875	5.556	$\frac{23}{32}$	.71875	18.256	5	.1969	59	2.3228
$\frac{15}{64}$	.234375	5.953	$\frac{47}{64}$	.734375	18.653	6	.2362	60	2.3622
$\frac{1}{4}$	.2500	6.350	$\frac{3}{4}$	.7500	19.050	7	.2756	61	2.4016
$\frac{17}{64}$	.265625	6.747	$\frac{49}{64}$	.765625	19.447	8	.3150	62	2.4409
$\frac{9}{32}$	.28125	7.144	$\frac{25}{32}$	.78125	19.844	9	.3543	63	2.4803
$\frac{19}{64}$	.296875	7.541	$\frac{51}{64}$	.796875	20.241	10	.3937	64	2.5197
$\frac{5}{16}$	.3125	7.938	$\frac{13}{16}$	.8125	20.638	11	.4331	65	2.5591
$\frac{21}{64}$	.328125	8.334	$\frac{45}{64}$	.828125	21.034	12	.4724	66	2.5984
$\frac{11}{32}$	.34375	8.731	$\frac{27}{32}$	.84375	21.431	13	.5118	67	2.6378
$\frac{23}{64}$	.359375	9.128	$\frac{55}{64}$	.859375	21.828	14	.5512	68	2.6772
$\frac{3}{8}$	.3750	9.525	$\frac{7}{8}$	.8750	22.225	15	.5906	69	2.7165
$\frac{25}{64}$	.390625	9.922	$\frac{57}{64}$	.890625	22.622	16	.6299	70	2.7559
$\frac{13}{32}$	.40625	10.319	$\frac{29}{32}$	.90625	23.019	17	.6693	71	2.7953
$\frac{27}{64}$	.421875	10.716	$\frac{59}{64}$	.921875	23.416	18	.7087	72	2.8346
$\frac{7}{16}$	.4375	11.113	$\frac{15}{16}$	.9375	23.813	19	.7480	73	2.8740
$\frac{29}{64}$	.453125	11.509	$\frac{61}{64}$	.953125	24.209	20	.7874	74	2.9134
$\frac{15}{32}$	.46875	11.906	$\frac{31}{32}$	.96875	24.606	21	.8268	75	2.9528
$\frac{31}{64}$	.484375	12.303	$\frac{63}{64}$	.984375	25.003	22	.8661	76	2.9921
$\frac{1}{2}$	.5000	12.700	1	1.000	25.400	23	.9055	77	3.0315
						24	.9449	78	3.0709
						25	.9843	79	3.1102
						26	1.0236	80	3.1496
						27	1.0630	81	3.1890
						28	1.1024	82	3.2283
						29	1.1417	83	3.2677
						30	1.1811	84	3.3071
						31	1.2205	85	3.3465
						32	1.2598	86	3.3858
						33	1.2992	87	3.4252
						34	1.3386	88	3.4646
						35	1.3780	89	3.5039
						36	1.4173	90	3.5433
						37	1.4567	91	3.5827
						38	1.4961	92	3.6220
						39	1.5354	93	3.6614
						40	1.5748	94	3.7008
						41	1.6142	95	3.7402
						42	1.6535	96	3.7795
						43	1.6929	97	3.8189
						44	1.7323	98	3.8583
						45	1.7717	99	3.8976
								100	3.9370

BURNDY CONDUCTOR NUMBERING SYSTEM - © BURNDY ENGINEERING CO., INC., 1940

Outside Dia. IN	Outside Dia. MM	STR. CABLE		SOL. WIRE		AREA MM <sup>2</sup> Copper Cable	ACSR		PIPE SIZE CONDUCTOR				TUBE & ROD		SERVIT NO.	
		Cat. No.	Size	Cat. No.	Size		Cat. No.	Cable Size	Cat. No.	ST D	Cat No.	Ex Hvy	Cat. No.	Dia.		
.102	2.594			10W	10	5.261										KS90
.114	2.896			9W	9	6.634										
.116	2.946	10 C	10			5.261										
.125	3.175												60	1/8		
.129	3.277			8W	8	8.366										KS15
.130	3.302	9 C	9			6.634										
.144	3.658			7W	7	10.550										
.146	3.708	8 C	8			8.366										
.158	4.013						8R	8								
.162	4.115			6W	6	13.300										KS17
.164	4.166	7 C	7			10.550										
.176	4.470						7R	7								
.182	4.597			5W	5	16.770										
.184	4.648	6 C	6			13.300										
.198	5.029						6R	6								
.204	5.182			4W	4	21.150										KS20
.206	5.258	5 C	5			16.770										
.223	5.664						5R	5								
.229	5.817			3W	3	26.670										
.232	5.867	4 C	4			21.150										
.250	6.350						4R	4					61	1/4		
.258	6.553			2W	2	33.630										KS22
.260	6.629	3 C	3			2.6670										
.281	7.137						3R	3								
.289	7.344			1W	1	42.410										
.292	7.394	2 C	2			33.630										KS23
.316	8.026						2R	2								
.325	8.255			75	1/0	53.480										
.332	8.382	1 C	1			42.410										
.355	9.017						1R	1								
.365	9.274			76	2/0	67.430										
.372	9.474	25	1/0			53.480										KS25
.375	9.525												62	3/8		
.398	10.109						25R	1/0								
.405	10.287								10	1/8	50	1/8				
.410	10.414			77	3/0	85.030										
.419	10.617	26	2/0			67.430										KS26
.447	11.354						26R	2/0								
.460	11.684			78	4/0	107.200										
.470	11.938	27	3/0			85.030										
.500	12.700												63	1/2		
.502	12.725						27R	3/0								
.528	13.414	28	4/0			107.200										KS28
.540	13.716								11	1/4	51	1/4				
.563	14.326						28R	4/0								
.575	14.605	29	250			127.000										
.630	16.002	30	300			152.000										
.633	16.078						29R	266.800								
.642	16.307						30R	266.800								
.675	17.145								12	3/8	52	3/8				
.680	17.272						31R	300.000								
.681	17.297	31	350			177.000										KS31
.721	18.313						32R	336.400								
.728	18.494	32	400			203.000										
.741	18.824						33R	336.400								
.750	19.050												64	3/4		
.772	19.609	33	450			228.000										
.783	19.888						34R	397.500								
.806	20.472						35R	397.500								
.813	20.676	34	500			253.000										
.840	21.336								13	1/2	53	1/2				
.855	21.717	35	550			279.000										KS34
.858	21.742						36R	477.000								
.883	22.428						37R	477.000								
.893	22.682	36	600			304.000										
.904	22.962						38R	500.000								
.927	23.546						39R	556.500								
.929	23.597	37	650			329.000										
.953	24.206						40R	556.500								
.953	24.206						41R	605.000								
.964	24.486	38	700			355.000										
.977	24.714						42R	636.000								
.998	25.349	39	750			380.000										KS39
1.000	25.400						43R	666.600					65	1		


BURNDY CONDUCTOR NUMBERING SYSTEM (continued)

Outside Dia. IN	Outside Dia. MM	STR. CABLE		SOL. WIRE		AREA MM <sup>2</sup> Copper Cable	ACSR		PIPE SIZE CONDUCTOR				TUBE & ROD		SERVIT NO.	
		Cat. No.	Size	Cat. No.	Size		Cat. No.	Cable Size	Cat. No.	ST D	Cat No.	Ex Hvy	Cat. No.	Dia.		
1.031	26.187	40	800			405.000										
1.036	26.314						44R	715,500								
1.050	26.670								14		54					
1.062	26.975	41	850			431.000										
1.094	27.762	42	900			456.000	45R	795,000								
1.123	28.524	43	950			481.000										
1.146	29.108						46R	874,000								
1.152	29.264	44	1000			507.000										KS44
1.162	29.515						47R	900,000								
1.196	30.378						48R	954,000								
1.209	30.709	444	1100			557.000										
1.246	31.648						49R	1,033,500								
1.250	31.750												66	1		
1.263	32.080	448	1200			608.000										
1.289	32.744	45	1250			633.000										
1.293	32.817						50R	1,113,000								
1.315	33.404	452	1300						15	1	55	1				
1.338	33.960						51R	1,192,500								
1.364	34.646	456	1400			709.000										
1.382	35.103						52R	1,272,000								
1.412	35.865	46	1500			760.000										
1.424	36.170						53R	1,351,500								
1.459	37.059	464	1600			811.000										
1.465	37.214						54R	1,431,000								
1.500	38.100												67	1-1/2		
1.504	38.202	468	1700			861.000										
1.506	38.252						55R	1,510,500								
1.526	38.786	47	1750			866.000										
1.545	39.218						56R	1,590,000								
1.548	39.319	472	1800			912.000										
1.590	40.386	476	1900			963.000										
1.632	41.427	48	2000			1013.000										
1.660	42.164								16	1	56	1				
1.729	43.917	483	2250			1140.000										
1.824	46.330	486	2500			1267.000										
1.900	48.260								17	1-1/2	57	1-1/2				
1.914	48.616	490	2750			1393.000										
1.988	50.495	493	3000			1520.000										
2.000	50.800												68	2		
2.375	60.325								18	2	58	2				
2.500	63.500												69	2-1/2		
2.875	73.025								19	2-1/2	59	2-1/2				
3.000	76.200												70	3		
3.500	88.900								20	3	90	3	71	3-1/2		
4.000	101.600								21	3-1/2	91	3-1/2	72	4		
4.500	114.300								22	4	92	4	73	4-1/2		
5.000	127.000								23	4-1/2	93	4-1/2	74	5		
5.563	141.300								24	5	94	5				
6.063	154.000								85	5-1/2	95	5-1/2				
6.625	168.275								86	6	96	6				
7.625	193.675								87	7	97	7				
8.625	219.075								88	8	98	8				

PRESENT INSTALLATION TOOL INDEX

This chart provides a cross-reference between die index numbers marked on BURNDY® COMPRESSION CONNECTORS and the CORRESPONDING DIE SETS used with the various BURNDY® INSTALLATION TOOLS. This is the only way to have a complete connections with the BURNDY® ENGINEERED SYSTEM.

A die index number has been assigned to each required groove configuration. A prefix letter is used to indicate the specific installation tool for which the die has been designed, as shown.

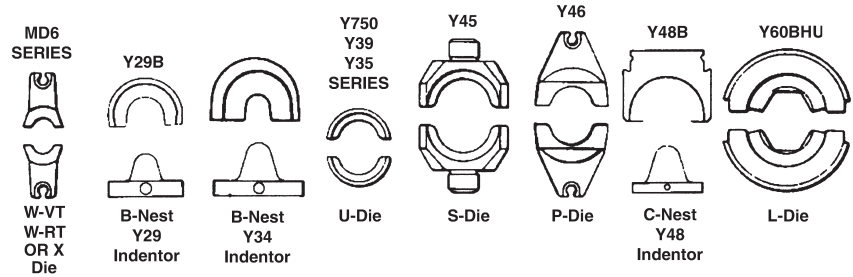

U	34	ART	USE CHART (CHART III)		
			WIRE SIZE (CHART II) OR INDEX		
			TOOL TYPE (CHART I)		
<b>CHART I</b>					
A - Y34A	E - Y44B	P - Y46	X - OUR840/MD-6		
B - Y34BH	F - Y486RB	S - Y45			
C - Y48B	G - Y34C	U - Y35			
	L - Y60B	W - MD-6/OUR840			
<b>CHART II</b>					
12 - #12	4C - #4	26 - 2/0	31 - 350 MCM	OR INDEX	
10 - #10	3C - #3	27 - 3/0	32 - 400 MCM	i.e., U312	
8C - # 8	2C - #2	28 - 4/0	34 - 500 MCM	312 Die Index	
6C - # 6	1C - #1	29 - 250 MCM	36 - 600 MCM		
5C - # 5	25 - 1/0	30 - 300 MCM	39 - 750 MCM		
			44 - 1000 MCM		
<b>CHART III</b>					
A - ALUMINUM					
B - INDENTOR NEST (USED WITH INDENTOR DIE # Y34P**)					
R - ROUND DIE (CIRCUMFERENTIAL)					
T - TWIN DIE (BOTH HALVES)					

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES										
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC						
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B <sup>⑤</sup>	Y35 <sup>①</sup>	Y39	Y750 <sup>①</sup>	Y45 <sup>②</sup>	Y46 <sup>③</sup>	Y60 Ser.
A				DIE SET					U-A	U-A	U-A	U-A	U-A	
BG				DIE SET		Perm. GR W-BG	X-BG X-NBG		U-BG	U-BG	U-BG	U-BG	U-BG	
C				DIE SET	BROWN	W-C			U-C	U-	U-C	U-C	U-C	
D				DIE SET					U-D	U-D	U-D	U-D	U-D	
D3				DIE SET	BLUE				U-YFD	U-YFD	U-YFD	U-YFD	U-YFD	
				DIE SET		Perm. GR			U-D3	U-D3	U-D3	U-D3	U-D3	
E				DIE SET					U-E	U-E	U-E	U-E	U-E	
F				DIE SET					U-F	U-F	U-F	U-F	U-F	
H				DIE SET					U-H	U-H	U-H	U-H	U-H	
K-1/4				DIE SET		WK14								
K-5/16				DIE SET		WK516			UK516T	UK526T	UK516T	UK516T	UK516T	
K-3/8				DIE SET		WK38			UK38T	UK38T	UK38T	UK38T	UK38T	
K-1/2				DIE SET		WK12								
K-9/16				DIE SET		WK916			UK916T	UK916T	UK916T	UK916T	UK916T	
K-19/32				DIE SET		WK1932								
K-5/8-1				DIE SET					UK581T	UK581T	UK581T	UK581T	UK581T	
K-11/16				DIE SET		WK1116			UK1116T	UK1116T	UK1116T	UK1116T	UK1116T	
K-3/4				DIE SET					UK34T	UK34T	UK34T	UK34T	UK34T	
K-1				DIE SET					UK1T	UK1T	UK1T	UK1T	UK1T	
K-1-5/16				DIE SET					UK1516T	UK1516T	UK1516T	UK1516T	UK1516T	
K-635				DIE SET		WK737			UK737T	UK737T	UK737T	UK737T	UK737T	
K-747				DIE SET		WK747								
K-781				DIE SET		WK781								
K-840				DIE SET		W-K840			U-K840	U-K840	U-K840	U-K840	U-K840	
KB				DIE SET		WKB			UKBT	UKBT	UKBT	UKBT	UKBT	
KBKT				DIE SET					UKBKTT	UKBKTT	UKBKTT	UKBKTT	UKBKTT	
KC				DIE SET					UKCT	UKCT	UKCT	UKCT	UKCT	
KK				DIE SET		WKK								
KR				DIE SET	YELLOW									P-YFR
												S-KR	P-KR	
KT				DIE SET		WKT								
KU				DIE SET					UKUT	UKUT	UKUT	UKUT	UKUT	
L				DIE SET		W-L			U-L	U-L	U-L	U-L	U-L	
L80				DIE SET					U32XRT	U32XRT	U32XRT	U32XRT	U32XRT	
L99				DIE SET	PINK				U38XRT	U38XRT	U38XRT	U38XRT	U38XRT	
L115				DIE SET	YELLOW				U44XRT	U44XRT	U44XRT	U44XRT	U44XRT	
M				DIE SET					U-M	U-M	U-M	U-M	U-M	
N				DIE SET	RED				U-YFN	U-YFN	U-YFN	U-YFN	U-YFN	
									U-N	U-N	U-N	U-N	U-N	
O				DIE SET	GREEN				U-YFO	U-YFO	U-YFO	U-YFO	U-YFO	
						Perm. GR W-O			U-O	U-O	U-O	U-O	U-O	
Q				DIE SET		W-Q								

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
 ④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑤ Also pneumatic version Y29NC.

PRESENT INSTALLATION TOOL INDEX (continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES										
GROOVE		MECH.	HYD.	DIE INFORMATION			MECHANICAL		HYDRAULIC					
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.
R				DIE SET					U-R	U-R	U-R	U-R	U-R	
T				DIE SET								S-T		
Z				DIE SET								S-Z		
7 94		MR4C MY29-3 MY29-11	1 CRIMP	DIE SET	BLUE	W5CRT	X5CRT		U5CRT	U5CRT	U5CRT	U5CRT	U5CRT	
				NEST				D6CL	U6CD-1	U6CD-1	U6CD-1	U6CD-1	U6CD-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
8 95		MR4C MY29-3 MY29-11	1 CRIMP	DIE SET	GRAY	W4CRT	X4CRT		U4CRT	U4CRT	U4CRT	U4CRT	U4CRT	
				NEST				D4CL	U4CD-1	U4CD-1	U4CD-1	U4CD-1	U4CD-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
9 96		MY29-3 MY29-11	1 CRIMP	DIE SET	WHITE	W3CRT	X3CRT		U3CRT	U3CRT	U3CRT	U3CRT	U3CRT	
				NEST				D3CL	U3CD-1	U3CD-1	U3CD-1	U3CD-1	U3CD-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
10 97		MY29-3 MY29-11	1 CRIMP	DIE SET	BROWN	W2CRT	X2CRT		U2CRT	U2CRT	U2CRT	U2CRT	U2CRT	
				NEST				D2CL	U2CD-1	U2CD-1	U2CD-1	U2CD-1	U2CD-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
11 98		MY29-3 MY29-11	1 CRIMP	DIE SET	GREEN	W1CRT-1	X1CRT-1		U1CRT-1	U1CRT-1	U1CRT-1	U1CRT-1	U1CRT-1	
				NEST				D1CL	U1CD-1	U1CD-1	U1CD-1	U1CD-1	U1CD-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
12 99		MY29-3 MY29-11	1 CRIMP	DIE SET	PINK	W25RT	X25RT		U25RT	U25RT	U25RT	U25RT	U25RT	
				NEST				D25L	U25D-1	U25D-1	U25D-1	U25D-1	U25D-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
13 100		MY29-3 MY29-11	1 CRIMP	DIE SET	BLACK	W26RT	X26RT		U26RT	U26RT	U26RT	U26RT	U26RT	
				NEST				D26L	U26D-1	U26D-1	U26D-1	U26D-1	U26D-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
14 101		MY29-3 MY29-11	1 CRIMP	DIE SET	ORANGE	W27RT	X27RT		U27RT	U27RT	U27RT	U27RT	U27RT	
				NEST				D27L	U27D-1	U27D-1	U27D-1	U27D-1	U27D-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
15		MY29-3 MY29-11	1 CRIMP	DIE SET	PURPLE	W28RT	X28RT		U28RT	U28RT	U28RT	U28RT	U28RT	
				NEST				D28L	U28D-1	U28D-1	U28D-1	U28D-1	U28D-1	
				INDENTOR				Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	
16		MY29-3 MY29-11	1 CRIMP	DIE SET	YELLOW	W29RT④	X29RT		U29RT	U29RT	U29RT	U29RT	U29RT	
				NEST				D29L		U29D-1	U29D-1	U29D-1	U29D-1	
				INDENTOR				Y29PR		Y34PR	Y34PR	Y34PR	Y34PR	
17			1 CRIMP	DIE SET	WHITE	W30RT④			U30RT	U30RT	U30RT	U30RT	U30RT	L30RT
				NEST						U30D-1	U30D-1	U30D-1	U30D-1	
				INDENTOR						Y34PR	Y34PR	Y34PR	Y34PR	
18			1 CRIMP	DIE SET	RED	W31RT④			U31RT	U31RT	U31RT	U31RT	U31RT	L31RT
				NEST						U31D-1	U31D-1	U31D-1	U31D-1	
				INDENTOR						Y34PR	Y34PR	Y34PR	Y34PR	
19			1 CRIMP	DIE SET	BLUE	W32RT④			U32RT	U32RT	U32RT	U32RT	U32RT	L32RT
				NEST						U32D-1	U32D-1	U32D-1	U32D-1	
				INDENTOR						Y34PR	Y34PR	Y34PR	Y34PR	

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
 ④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑤ Also pneumatic version Y29NC.



PRESENT INSTALLATION TOOL INDEX (continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES										
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL			HYDRAULIC					
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B Ⓢ	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.
20			1 CRIMP	DIE SET	BROWN	W34RTⓈ			U34RT	U34RT	U34RT	U34RT	U34RT	L34RT
				NEST					U34D-1	U34D-1	U34D-1	U34D-1		
				INDENTOR					Y34PR	Y34PR	Y34PR	Y34PR		
21			1 CRIMP	DIE SET	YELLOW					U35RT	U35RT	U35RT	U35RT	
				NEST										
				INDENTOR										
22			1 CRIMP	DIE SET	GREEN					U36RT	U36RT	U36RT	U36RT	L36RT
				NEST									P36D	
				INDENTOR									P44PR	
23			1 CRIMP	DIE SET	ORANGE					U37RT	U37RT	U37RT	U37RT	
				NEST										
				INDENTOR										
24			1 CRIMP	DIE SET	BLACK					U39RT	U39RT	S39RT	P39RT	L39RT
				NEST									P39D	
				INDENTOR									P44PR	
25			1 CRIMP	DIE SET	ORANGE							S40RT	P40RT	
				NEST									P40D	
				INDENTOR									P44PR	
26			1 CRIMP	DIE SET	GOLD									
				NEST										
				INDENTOR										
27			1 CRIMP	DIE SET	WHITE							S44RT	P44RT	L44RT
				NEST									P44D	
				INDENTOR									P44PR	
29				DIE SET	YELLOW								P45RT	L45RT
				NEST										
				INDENTOR										
30				DIE SET	ORANGE									
				NEST										
				INDENTOR										
31				DIE SET	GREEN							S46RT	P46RT	L46RT
				NEST									No Nest	
				INDENTOR									P44PR	
33				DIE SET	GRAY									L47RT
				NEST										
				INDENTOR										
34				DIE SET	BROWN									L48RT
				NEST										
				INDENTOR										
38		MR4C MR8G98 MR89Q MY28 Y8MRB-1		NEST				DV8L	UV8L	UV8L	UV8L	UV8L	UV8L	
				INDENTOR				Y29PL	Y34PL	Y34PL	Y34PL	Y34PL	Y34PL	

Ⓢ Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 Ⓣ Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

Ⓢ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
 Ⓣ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

Ⓢ Also pneumatic version Y29NC.

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES										
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC						
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.
39		MR4C MY28	1 CRIMP	NEST				DV6L	UV6L	UV6L	UV6L	UV6L	UV6L	
				INDENTOR				Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA
40		MR4C MY28		NEST				DV4L	UV4L	UV4L	UV4L	UV4L	UV4L	
				INDENTOR				Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA
41		MY28		NEST				DV2L	UV2;	UV2;	UV2;	UV2;	UV2;	
				INDENTOR				Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA
42		MY28		NEST				DV1L	UV1L	UV1L	UV1L	UV1L	UV1L	
				INDENTOR				Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA
43		MY28		NEST				DV25L	UV25L	UV25L	UV25L	UV25L	UV25L	
				INDENTOR				Y29PL	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA
44		MY28		NEST				DV26L	UV26L	UV26L	UV26L	UV26L	UV26L	
				INDENTOR				Y29PL	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA
45		MY28		NEST					UV27L	UV27L	UV27L	UV27L	UV27L	
				INDENTOR					Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA
46		MY28		NEST					UV28L	UV28L	UV28L	UV28L	UV28L	
				INDENTOR					Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA
49				DIE SET	RED	W8CRT	X8CRT		U8CRT	U8CRT	U8CRT	U8CRT	U8CRT	
161				DIE SET		W161	X-161		U161	U161	U161	U161	U161	
162				DIE SET		W162	W162		U162	U162	U162	U162	U162	
163 505				DIE SET		W163	W163		U163	U163	U163	U163	U163	
164 275				DIE SET		W164			U164	U164	U164	U164	U164	
165 205 287 339				DIE SET		W165	X-165		U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205	L165
166 206 459				DIE SET		W166			U166/ U459	U166/ U459	U166/ U459	U166/ U459	U166/ U459	L166
167 207 211 256 568				DIE SET		W167			U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	L167
168 208				DIE SET					U168	U168	U168	U168	U168	L168
169				DIE SET					U169	U169	U169	U169	U169	L169
170 306				DIE SET					U170	U170	U170	U170	U170	L170
171				DIE SET		W171			U171	U171	U171	U171	U171	
193				DIE SET					U193	U193	U193	U193	U193	L193
202				DIE SET					U202	U202	U202	U202	U202	
203				DIE SET					U203	U203	U203	U203	U203	
204				DIE SET					U204	U204	U204	U204	U204	
205 165 287 339				DIE SET		W165	X-165		U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205	L165
206 166 459				DIE SET		W166			U166/ U459	U166/ U459	U166/ U459	U166/ U459	U166/ U459	L166
207 167 211 256 568				DIE SET		W167			U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	L167
208 168				DIE SET					U168	U168	U168	U168	U168	L168
209				DIE SET					U209	U209	U209	U209	U209	L209
210				DIE SET					U210	U210	U210	U210	U210	L210

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
 ④ Also pneumatic version Y29NC.

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES									
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC					
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.
211 167 256 568				DIE SET		W167		U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	L167
236				DIE SET		W236		U236	U236	U236	U236	U236	
237				DIE SET		W237	X-237	U237	U237	U237	U237	U237	
238				DIE SET		W238		U238	U238	U238	U238	U238	
239				DIE SET		W239	X-239	U239	U239	U239	U239	U239	
240				DIE SET	RED	W240		U240	U240	U240	U240	U240	
241				DIE SET		W241	X-241	U241	U241	U241	U241	U241	
242 244	3S/4S			DIE SET		W242		U242	U242	U242	U242	U242	L242
243				DIE SET		W243		U243	U243	U243	U243	U243	L243
244 242	3S/4S			DIE SET		W242		U242	U242	U242	U242	U242	L242
245	9A			DIE SET		W245	X-245	U245	U245	U245	U245	U245	L245
246 248	5S			DIE SET		W248		U248	U248	U248	U248	U248	L248
247				DIE SET		W247	X-247	U247	U247	U247	U247	U247	L247
248 246	5S			DIE SET		W248		U248	U248	U248	U248	U248	L248
249	11A			DIE SET		W249	X-249	U249	U249	U249	U249	U249	L249
250				DIE SET				U250	U250	U250	U250	U250	L250
251	12A			DIE SET	RED	W251		U251	U251	U251	U251	U251	L251
252				DIE SET				U252	U252	U252	U252	U252	L252
253				DIE SET				U253	U253	U253	U253	U253	L253
254				DIE SET							S254	P254	L254
255				DIE SET				U255	U255	U255	U255	U255	L255
256 167 207 211 568				DIE SET		W167		U167/ U567	U167/ U567	U167/ U567	U167/ U567	U167/ U567	L167
257				DIE SET				U257	U257	U257	U257	U257	L257
259				DIE SET				U259	U259	U259	U259	U259	
260				DIE SET									L260
261 318	15A			DIE SET				U261	U261	U261	U261	U261	L261
263				DIE SET				U263	U263	U263	U263	U263	
267				DIE SET				U267	U267	U267	U267	U267	L267
275 164				DIE SET		W164		U164	U164	U164	U164	U164	
276				DIE SET				U276	U276	U276	U276	U276	
285				DIE SET				U285	U285	U285	U285	U285	
287 165 205 339				DIE SET		W165		U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205	L165
292 578				DIE SET							S292	P292	L292
293 294				DIE SET							S293	P293	L293
296		MY29-3	1 CRIMP	DIE SET	TAN		X25ART	U25ART	U25ART	U25ART	U25ART		
				NEST							P27D		
				INDETOR							P34PR5		
297		MY29-3	1 CRIMP	DIE SET	OLIVE		X26ART	U26ART	U26ART	U26ART	U26ART		
				NEST							P29D		
				INDENTOR							P34PR5		

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES									
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC					
BURNDY	E EI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.
298		MY29-3	1 CRIMP	DIE SET	WHITE		X28ART	U28ART	U28ART	U28ART	U28ART	U28ART	L28ART
				NEST							P31D		
				INDENTOR							Y45PR5		
299			1 CRIMP	DIE SET	BROWN			U31ART	U31ART	U31ART	U31ART	U31ART	L31ART
				NEST							P35D		
				INDENTOR							P48PR1		
300			1 CRIMP	DIE SET	PINK			U34ART	U34ART	U34ART	U34ART	U34ART	L34ART
				NEST							P39D		
				INDENTOR							P49PR1		
301			1 CRIMP	DIE SET	RED						S39ART	P39ART	L39ART
				NEST							P45D		
				INDENTOR							P48PR1		
302			1 CRIMP	DIE SET	BROWN						S44ART	P44ART	L44ART
				NEST							No Nest		
				INDENTOR							P48PR1		
303				DIE SET	GRAY			U42ART	U42ART	U42ART	U42ART	U42ART	
304				DIE SET				U304	U304	U304	U304	U304	L304
305 341				DIE SET				U305	U305	U305	U305	U305	L305
306 170				DIE SET				U170	U170	U170	U170	U170	L170
308				DIE SET				U308	U308	U308	U308	U308	
313				DIE SET				U313	U313	U313	U313	U313	L313
314 376				DIE SET									L314
316				DIE SET				U316	U316	U316	U316	U316	L316
317 426				DIE SET				U317	U317	U317	U317	U317	L317
318 261				DIE SET				U261	U261	U261	U261	U261	L261
319				DIE SET							S319	P319	L319
320				DIE SET							S320	P320	L320
321				DIE SET				U321	U321	U321	U321	U321	L321
322				DIE SET				U322	U322	U322	U322	U322	
324			1 CRIMP	DIE SET	RED			U29ART	U29ART	U29ART	U29ART	U29ART	L29ART
				NEST							P32D		
				INDENTOR							P34PR5		
326 538				DIE SET				U33RT	U33RT	U33RT	U33RT	U33RT	
327	14A			DIE SET				U327	U327	U327	U327	U327	L327
328				DIE SET									L328
329				DIE SET				U329	U329	U329	U329	U329	
331				DIE SET				U331	U331	U331	U331	U331	
339 165 205 287				DIE SET			X-339	U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205	
341 305				DIE SET				U305	U305	U305	U305	U305	L305
342				DIE SET							S342	P342	L342
344				DIE SET									L344
345				DIE SET									L345

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
 ④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES										
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC						
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.	
346 ⑦			1 CRIMP	DIE SET	GRAY		X6CART	U6CABT	U6CABT	U6CABT	U6CABT	U6CABT		
348			1 CRIMP	DIE SET	PINK		X2CART	U2CABT	U2CABT	U2CABT	U2CABT	U2CABT		
350				DIE SET				U350	U350	U350	U350	U350	L350	
352				DIE SET							S352	P352	L352	
373				DIE SET				U373	U373	U373	U373	U373		
374		MY29-3		DIE SET	BLUE		X8CART	U8CABT	U8CABT	U8CABT	U8CABT	U8CABT		
375		MY29-3	1 CRIMP	DIE SET	GREEN		X4CART	U4CABT	U4CABT	U4CABT	U4CABT	U4CABT		
376 314				DIE SET									L314	
400				DIE SET	PURPLE			U38RT	U38RT	U38RT	U38RT	U38RT		
403				DIE SET				U403	U403	U403	U403	U403		
419				DIE SET							S419	P419	L419	
422				DIE SET									L422	
426 317				DIE SET				U317	U317	U317	U317	U317		
459 166				DIE SET				U166/459	U166/459	U166/459	U166/459	U166/459		
467		MY29-3	1 CRIMP	DIE SET	RUBY		X27ART	U27ART	U27ART	U27ART	U27ART	U27ART		
				NEST								P30D		
				INDENTOR									P34PR5	
468				DIE SET			U468	U468	U468	U468	U468			
469				DIE SET						S469	P469	L469		
470			1 CRIMP	DIE SET	BLUE			U30ART	U30ART	U30ART	U30ART	U30ART	L30ART	
				NEST									P34D	
				INDENTOR										P48PR1
471		MY29-3	1 CRIMP	DIE SET	GOLD		X1CART	U1CART	U1CART	U1CART	U1CART	U1CART		
				NEST										
				INDENTOR										
472			1 CRIMP	DIE SET	GREEN			U32ART	U32ART	U32ART	U32ART	U32ART	L32ART	
				NEST										P35D
				INDENTOR										P48PR1
473			1 CRIMP	DIE SET	BLACK			U36ART	U36ART	U36ART	U36ART	U36ART	L36ART	
				NEST										P44D
				INDENTOR										P48PR1
474			1 CRIMP	DIE SET	GOLD						S40ART	P40ART	L40ART	
				NEST										
				INDENTOR										
478			1 CRIMP	DIE SET	BLUE								L46ART	
				NEST										
				INDENTOR										
479				DIE SET	RED							L48ART		
490 547				DIE SET				U490	U490	U490	U490	U490	L490	
495				DIE SET									L495	
505 163				DIE SET		W163		U163	U163	U163	U163	U163	L163	

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
 ④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.

⑦ Hexagonal crimp

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES									
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC					
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.
511		MY29-3		NEST INDENTOR									
512		MY29-3		NEST INDENTOR									
513		MY29-3		NEST INDENTOR									
514		MY29-3		NEST INDENTOR									
515		MY29-3		NEST INDENTOR									
516		MY29-3		NEST INDENTOR									
517		MY29-3		NEST INDENTOR									
518		MY29-3		NEST INDENTOR									
519		MY29-3		NEST INDENTOR									
520		MY29-3		NEST INDENTOR									
538 326				DIE SET				U33RT	U33RT	U33RT	U33RT	U33RT	
547 490				DIE SET				U490	U490	U490	U490	U490	L490
552				DIE SET				U552	U552	U552	U552	U552	
568 167 207 211 256				DIE SET		W167		U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	
575				DIE SET									L575
576				DIE SET									L576
578 292				DIE SET							S292	P292	L292
579				DIE SET							S579	P579	L579
587				DIE SET									L47ART
607				DIE SET				U607	U607	U607	U607	U607	
608				DIE SET				U608	U608	U608	U608	U608	608
609				DIE SET				U609	U609	U609	U609	U609	
627				DIE SET									L627
642				DIE SET				U642	U642	U642	U642	U642	L642
643				DIE SET				U643	U643	U643	U643	U643	
647 <sup>Ⓢ</sup>				DIE SET									L45ART
648				DIE SET									L648
654				DIE SET	PURPLE			U654	U654	U654	U654	U654	L654
655	13A			DIE SET				U655	U655	U655	U655	U655	
658				DIE SET				U658	U658	U658	U658	U658	
659				DIE SET		W659		U659	U659	U659	U659	U659	
660				DIE SET		W660	X-660	U660	U660	U660	U660	U660	
667				DIE SET									L667
668				DIE SET				U668	U668	U668	U668	U668	

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.  
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
 ④ Die 302 recommended for 1.84 O.D. barrel.

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES									
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC					
BURNDY	EEL	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.
676				DIE SET				U676	U676	U676	U676	U676	
677				DIE SET				U677	U677	U677	U677	U677	L677
678				DIE SET				U678	U678	U678	U678	U678	
679				DIE SET				U679	U679	U679	U679	U679	
684				DIE SET									L684
687				DIE SET		W687	X-687						
690	1S			DIE SET		W690		U690	U690	U690	U690	U690	
691	2S			DIE SET		W691		U691	U691	U691	U691	U691	
692	4S			DIE SET		W692		U692	U692	U692	U692	U692	
693	6A			DIE SET		W693		U693	U693	U693	U693	U693	
694	10A			DIE SET		W694		U694	U694	U694	U694	U694	
702				DIE SET		W702							
705				DIE SET				U705	U705	U705	U705	U705	
717Ⓢ				DIE SET							S717	P717	L717/ L717W
718Ⓢ				DIE SET									L718
719Ⓢ				DIE SET							S719	P719	L719/ L719W
720Ⓢ				DIE SET							S720	P720	L720/ L720W
721Ⓢ				DIE SET									L721
722Ⓢ				DIE SET							S722	P722	L722/ L722W
723Ⓢ				DIE SET									L723
724Ⓢ				DIE SET							S724	P724	L724/ L724W
725Ⓢ				DIE SET							S725	P725	L725/ L725W
726Ⓢ				DIE SET									L726
727Ⓢ				DIE SET									L727/ L727W
728Ⓢ				DIE SET									L728/ L728W
729Ⓢ				DIE SET									L729/ L729W
735Ⓢ				DIE SET									L735/ L735W
740Ⓢ				DIE SET									L740
786				DIE SET				U786	U786	U786	U786	U786	
788				DIE SET				U788	U788	U788	U788	U788	
789				DIE SET									L789
936Ⓢ			1 CRIMP	DIE SET	YELLOW			U39ART-2	U39ART-2	U39ART-2	U39ART-2	U39ART-2	L39ART-2
997				DIE SET	ORANGE			U997	U997	U997	U997	U997	
998				DIE SET						PU998	S998	P998	
999				DIE SET							S999	P999	
1011				DIE SET						U1011	S1011	P1011	
1012				DIE SET							S1012		

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series.

② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series.  
Ⓢ Hexagonal crimp

**PRESENT INSTALLATION TOOL INDEX (continued)**

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES										
GROOVE		MECH.	HYD.	DIE INFORMATION		MECHANICAL		HYDRAULIC						
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y60 Ser.	
1013		MY29-11		NEST				UV8L	UV8L	UV8L	UV8L	UV8L		
				INDENTOR				Y34PL	Y34PL	Y34PL	Y34PL	Y34PL		
1014		MY29-11		NEST				U6CD1	U6CD1	U6CD1	U6CD1	U6CD1		
				INDENTOR				Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1015		MY29-11		NEST				U4CD1	U4CD1	U4CD1	U4CD1	U4CD1		
				INDENTOR				Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1016		MY29-11		NEST				U3CD1	U3CD1	U3CD1	U3CD1	U3CD1		
				INDENTOR				Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1017		MY29-11		NEST				U2CD1	U2CD1	U2CD1	U2CD1	U2CD1		
				INDENTOR				Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1018		MY29-11		NEST				U1CD1	U1CD1	U1CD1	U1CD1	U1CD1		
				INDENTOR				Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1019		MY29-11		NEST				U25D1	U25D1	U25D1	U25D1	U25D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1020		MY29-11		NEST				U26D1	U26D1	U26D1	U26D1	U26D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1021		MY29-11		NEST				U27D1	U27D1	U27D1	U27D1	U27D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1022		MY29-11		NEST				U28D1	U28D1	U28D1	U28D1	U28D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1023		MY29-11		NEST				U29D1	U29D1	U29D1	U29D1	U29D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1024				NEST				U30D1	U30D1	U30D1	U30D1	U30D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1025				NEST				U31D1	U31D1	U31D1	U31D1	U31D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1026				NEST				U32D1	U32D1	U32D1	U32D1	U32D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1027				NEST				U34D1	U34D1	U34D1	U34D1	U34D1		
				INDENTOR				Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1028				NEST								P36D		
				INDENTOR										Y48PR1
1029				NEST									P38D	
				INDENTOR										P48PR1
1030				NEST									P39D	
				INDENTOR										P48PR1
1031				NEST									P40D	
				INDENTOR										P48PR1
1032				NEST									P44D	
				INDENTOR										P48PR1
1102				DIE SET	WHITE								P1102	
1103				DIE SET	BLUE									P1103
1104				DIE SET	BROWN					U1104				P1104
1105				DIE SET						U1105				P1105
2000				NEST				U27B	U27B	U27B	U27B			
				INDENTOR				Y34PR15	Y34PR15	Y34PR15	Y34PR15			



**COLOR CODING FOR OVERHEAD CONNECTORS**

Color Code	Wire Dia. per Strand			
	Str.	Compact	Sol.	ACSR
Brown	10		8	
Green	8		6	
Blue	5, 6		4	6
Orange	3, 4	#2	2	4
Red	1-19, 2	1/0	1	2
Yellow	1/0	2/0		1/0, 1
Gray	2/0	3/0		2/0
Black	3/0	4/0		3/0
Pink	4/0	266, 300		4/0
Red	250			
White	266			
Blue	300	350		266.8 (26/7, 18/1)
Brown	336			
Green	350, 397, 400			336.4 (26/7, 18/1)
Gray	450			
Pink	500			477 (18/1)
Green	556			
Purple	600			
Yellow				556.5 (24/7, 26/7)
Blue	650			
Red	700			
Yellow	750			
Orange	800			
White	900			
Brown	1000			

**NOTE:** This chart is only intended as a guide. For specific applications, refer to the catalog page of the connector.

**COLOR CODING FOR AL/CU CONNECTORS**

Color Code	Str.	Color Code	Str.
Blue	8	Blue	300
Gray	6	Brown	350
Green	4	Green	400
Pink	2	Pink	500
Gold	1	Black	600
Tan	1/0	Yellow	700/750
Olive	2/0	Red	700/750
Ruby	3/0	Brown	1000
White	4/0	Blue	1500
Red	250	Red	2000

**NOTE:** This chart is only intended as a guide. For specific applications, refer to the catalog page of the connector.

## COLOR CODING FOR COPPER LUGS AND SPLICES

Color Code	Code Size		Flex Cable
	Str.	Sol.	
Red	8	6	8
Blue	6		6
Blue	5		
Gray	4		4
White	3	2	
Brown	2		2
Green	1		1
Pink	1/0		1/0
Black	2/0		2/0
Orange	3/0		3/0
Purple	4/0		4/0
Yellow	250		4/0 and 250
White	300		250
Red	350		313.1
Blue	400		373.7
Brown	500		444.4
Green	600		
Pink	700		535.3
Purple			600
Black	750		646
Yellow			777.7
Orange	800		
White	1000		
Yellow			1111
Green	1500		
Brown	2000		

**NOTE:** This chart is only intended as a guide. For specific applications, refer to the catalog page of the connector.

**BURNDY® REGISTERED AND TRADE NAMES**

Registered Name	Registered/Trade Name	Catalog Section	Registered/Trade Name	Catalog Section
4-POINT®	4-POINT®	N	PATRIOT®	N
BONDIT®	ALFLUID™	N	PENETROX™	F
BURNDY®	BARTAP™	A, E, L	POLYTAP™	A
BURNDYWeld®	BONDIT®	E	POPPER™	N
ENFORCER®	BURNDYWeld®	E	POSI-PRESS™	N
GRIDMAX®	CABELOK™	H	POWERLUG™	J
HYGROUND®	CLIPIT™	H	QIKLINK™	A
IMPLO®	CRIMPIT™	C, E, H	QIKLITE®	E
INFINITY DRIVE®	DURIUM™	D	QIKLUG™	A, E
IN-LINE®	ENFORCER®	N	QIKTAP™	B
PATRIOT®	FASTAP™	H	SCRULLUG™	A
SERVIT®	FINGRIP™	B	SERVIT POST™	E
The SmartCart®	FLEXITAP™	A	SERVIT®	A, H
There is Only One IMPLO®	GRIDLOK™	E	SPEC-BLOK™	A
	GRIDMAX®	E	STIRRUP™	H
<b>Connecting Power to Your World™</b>	GROUNDLINK™	E	STIRRUP™	J
	GROUNDMAX™	E	STUDBUG™	E
	HYCRAB™	K	SUPER-CLAMP™	E
	HYCRIMP™	H	TAPIT™	H
	HYDENT™	B, C	The SmartCart®	N
	HYFLUID™	N	TRITAP™	A
	HYGRID™	E	U-BLOK™	A
	HYGROUND®	E	UNIGROUND™	E
	HYLINK™	B, C, E	UNIRAP™	G
	HYLUG™	B, C, E, H	UNISPLICE™	H
	HYPLUG™	C, H	UNITAP™	A
	HYPRESS™	N	VARILUG™	L
	HYREDUCER™	B, C, K	VARITAP™	A
	HYSEALPLUG™	H	VERSILUG™	A
	HYSEALUG™	H	VERSIPOLE™	A
	HYSPLICE™	C, H	VERSITAIL™	E
	HYSTACK™	C	VERSITAP™	A, H
	HYTAIL™	E	VINYLUG™	B
	HYTAP™	C, E	VISEIT™	H
	HYTEE™	H	VISI-SHRINK™	F
	HYTOOL™	N	WEEB™	E
	IMPLO®	I	WEJTAP™	J
	INFINITY DRIVE®	N	WIREMIKE™	N
	IN-LINE®	N		
	INSULUG™	B		
	KA-LUG™	A		
	KOMPRESSOR™	N		
	L'IL CRIMP™	N		
	LINEMAN ASSIST™	H		
	LOKTAP™	H		
	MOLE™	A, K		
	MOLIMITER™	K		
	NOTAPE™	K		
	OKLIP™	A		
	OKLIP™	H		

ALPHA-NUMERIC INDEX BY CATALOG NUMBER

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
15	E-84	1167	I-57	2141	I-56	3118	I-56
32	E-84	1169	I-60	2142	I-57	3120	I-56
45	E-84	1170	I-60	2143	I-57	3121	I-56
65	E-84	1171	I-60	2144	I-57	3123	I-56
90	E-84	1174	I-60	2146	I-57	3124	I-56
115	E-84	1179	I-60	2149	I-60	3131	I-56
150	E-84	1181	I-60	2150	I-60	3133	I-56
200	E-84	1182	I-60	2157	I-60	3138	I-56
250	E-84	1190	I-57	2158	I-60	3139	I-56
500	E-84	1903	I-61	2165	I-60	3140	I-56
1050	I-55	1904	I-61	2166	I-60	3141	I-56
1051	I-55	1906	I-61	2167	I-57	3142	I-57
1052	I-55	1923	I-61	2169	I-60	3143	I-57
1053	I-55	1978	I-61	2170	I-60	3144	I-57
1054	I-55	1990	I-61	2171	I-60	3146	I-57
1056	I-55	1991	I-61	2174	I-60	3149	I-60
1057	I-55	1993	I-61	2179	I-60	3150	I-60
1058	I-55	1994	I-61	2181	I-60	3157	I-60
1059	I-55	1995	I-61	2182	I-60	3158	I-60
1060	I-55	1997	I-61	2190	I-57	3165	I-60
1061	I-55	1998	I-61	2903	I-61	3166	I-60
1062	I-55	2050	I-55	2904	I-61	3167	I-57
1063	I-55	2051	I-55	2906	I-61	3169	I-60
1064	I-55	2052	I-55	2923	I-61	3170	I-60
1065	I-55	2053	I-55	2978	I-61	3171	I-60
1066	I-55	2054	I-55	2990	I-61	3174	I-60
1067	I-55	2056	I-55	2991	I-61	3179	I-60
1070	I-55	2057	I-55	2993	I-61	3181	I-60
1072	I-55	2058	I-55	2994	I-61	3182	I-60
1073	I-56	2059	I-55	2995	I-61	3190	I-57
1074	I-56	2060	I-55	2997	I-61	9050	I-55
1075	I-56	2061	I-55	2998	I-61	9051	I-55
1076	I-56	2062	I-55	3050	I-55	9052	I-55
1077	I-56	2063	I-55	3051	I-55	9053	I-55
1079	I-56	2064	I-55	3053	I-55	9054	I-55
1080	I-56	2065	I-55	3054	I-55	9056	I-55
1083	I-56	2066	I-55	3056	I-55	9057	I-55
1084	I-56	2067	I-55	3057	I-55	9058	I-55
1085	I-60	2070	I-55	3058	I-55	9059	I-55
1086	I-60	2072	I-55	3059	I-55	9060	I-55
1090	I-56	2073	I-56	3060	I-55	9061	I-55
1093	I-60	2074	I-56	3061	I-55	9062	I-55
1094	I-56	2075	I-56	3062	I-55	9063	I-55
1095	I-56	2076	I-56	3063	I-55	9064	I-55
1103	I-56	2077	I-56	3064	I-55	9065	I-55
1112	I-56	2079	I-56	3065	I-55	9066	I-55
1113	I-56	2080	I-56	3066	I-55	9067	I-55
1114	I-56	2083	I-56	3067	I-55	9070	I-55
1117	I-56	2084	I-56	3070	I-55	9072	I-55
1118	I-56	2085	I-60	3072	I-55	9073	I-56
1120	I-56	2086	I-60	3073	I-56	9074	I-56
1121	I-56	2090	I-56	3074	I-56	9075	I-56
1123	I-56	2093	I-60	3075	I-56	9076	I-56
1124	I-56	2094	I-56	3076	I-56	9077	I-56
1131	I-56	2095	I-56	3077	I-56	9079	I-56
1133	I-56	2103	I-56	3079	I-56	9080	I-56
1138	I-56	2112	I-56	3080	I-56	9083	I-56
1139	I-56	2113	I-56	3083	I-56	9084	I-56
1140	I-56	2114	I-56	3084	I-56	9085	I-60
1141	I-56	2117	I-56	3085	I-60	9086	I-60
1142	I-57	2118	I-56	3086	I-60	9090	I-56
1143	I-57	2120	I-56	3090	I-56	9093	I-60
1144	I-57	2121	I-56	3093	I-60	9094	I-56
1146	I-57	2123	I-56	3094	I-56	9095	I-56
1149	I-60	2124	I-56	3095	I-56	9103	I-56
1150	I-60	2131	I-56	3103	I-56	9112	I-56
1157	I-60	2133	I-56	3112	I-56	9113	I-56
1158	I-60	2138	I-56	3113	I-56	9114	I-56
1165	I-60	2139	I-56	3114	I-56	9117	I-56
1166	I-60	2140	I-56	3117	I-56	9118	I-56

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
9120.....	I-56	1072/ACSS/TW.....	I-59	2051/ACSS/TW.....	I-59	3053/ACSS/TW.....	I-59
9121.....	I-56	1073/ACSS.....	I-58	2052/ACSS.....	I-58	3054/ACSS.....	I-58
9123.....	I-56	1073/ACSS/TW.....	I-59	2052/ACSS/TW.....	I-59	3054/ACSS/TW.....	I-59
9124.....	I-56	1074/ACSS.....	I-58	2053/ACSS.....	I-58	3056/ACSS.....	I-58
9131.....	I-56	1074/ACSS/TW.....	I-59	2053/ACSS/TW.....	I-59	3056/ACSS/TW.....	I-59
9133.....	I-56	1075/ACSS.....	I-58	2054/ACSS.....	I-58	3057/ACSS.....	I-58
9138.....	I-56	1075/ACSS/TW.....	I-59	2054/ACSS/TW.....	I-59	3057/ACSS/TW.....	I-59
9139.....	I-56	1076/ACSS.....	I-58	2056/ACSS.....	I-58	3059/ACSS.....	I-58
9140.....	I-56	1076/ACSS/TW.....	I-59	2056/ACSS/TW.....	I-59	3059/ACSS/TW.....	I-59
9141.....	I-56	10CD60.....	N-64, N-65	2057/ACSS.....	I-58	3060/ACSS.....	I-58
9142.....	I-57	115CI.....	E-84	2057/ACSS/TW.....	I-59	3060/ACSS/TW.....	I-59
9143.....	I-57	115Q.....	E-83	2059/ACSS.....	I-58	3061/ACSS.....	I-58
9144.....	I-57	1165-NZ.....	I-60	2059/ACSS/TW.....	I-59	3061/ACSS/TW.....	I-59
9146.....	I-57	11CD60.....	N-65	2060/ACSS.....	I-58	3062/ACSS.....	I-58
9149.....	I-60	12CD60.....	N-65, N-66	2060/ACSS/TW.....	I-59	3062/ACSS/TW.....	I-59
9150.....	I-60	12TONP1.....	N-59	2061/ACSS.....	I-58	3063/ACSS.....	I-58
9157.....	I-60	13CD60.....	N-66	2061/ACSS/TW.....	I-59	3063/ACSS/TW.....	I-59
9158.....	I-60	14CD60.....	N-66	2062/ACSS.....	I-58	3065/ACSS.....	I-58
9165.....	I-60	150Q.....	E-83	2062/ACSS/TW.....	I-59	3065/ACSS/TW.....	I-59
9166.....	I-60	15CD60.....	N-66	2063/ACSS.....	I-58	3066/ACSS.....	I-58
9167.....	I-57	15CI.....	E-84	2063/ACSS/TW.....	I-59	3066/ACSS/TW.....	I-59
9169.....	I-60	15CP.....	E-84	2065/ACSS.....	I-58	3067/ACSS.....	I-58
9170.....	I-60	15Q.....	E-83	2065/ACSS/TW.....	I-59	3067/ACSS/TW.....	I-59
9171.....	I-60	16CD60.....	N-67	2066/ACSS.....	I-58	3070/ACSS.....	I-58
9174.....	I-60	17CD60.....	N-67	2066/ACSS/TW.....	I-59	3070/ACSS/TW.....	I-59
9179.....	I-60	1PBS1/0.....	A-47	2067/ACSS.....	I-58	3072/ACSS.....	I-58
9181.....	I-60	1PBS2.....	A-47	2067/ACSS/TW.....	I-59	3072/ACSS/TW.....	I-59
9182.....	I-60	1PBS250.....	A-47	2070/ACSS.....	I-58	3073/ACSS.....	I-58
9190.....	I-57	1PBS350.....	A-47	2070/ACSS/TW.....	I-59	3073/ACSS/TW.....	I-59
433206016010.....	N-30	1PBS500.....	A-47	2072/ACSS.....	I-58	3074/ACSS.....	I-58
Y46CLWSBH.....	N-28	1PL2/02.....	A-47	2072/ACSS/TW.....	I-59	3074/ACSS/TW.....	I-59
07CD60.....	N-64	1PL2/03.....	A-47	2073/ACSS.....	I-58	3075/ACSS.....	I-58
08CD60.....	N-64	1PL2502.....	A-47	2073/ACSS/TW.....	I-59	3075/ACSS/TW.....	I-59
09CD60.....	N-64	1PL2503.....	A-47	2074/ACSS.....	I-58	3076/ACSS.....	I-58
100CHENBOX.....	D-3	1PL3502.....	A-47	2074/ACSS/TW.....	I-59	3076/ACSS/TW.....	I-59
100X200HGSBBOX.....	D-5	1PL42.....	A-47	2075/ACSS.....	I-58	30AH60.....	N-68, N-69
1050/ACSS.....	I-58	1PL43.....	A-47	2075/ACSS/TW.....	I-59	3165-NZ.....	I-60
1050/ACSS/TW.....	I-59	1PL44.....	A-47	2076/ACSS.....	I-58	31CHENBOX.....	D-3
1050/I.....	I-55	1PL6002.....	A-47	2076/ACSS/TW.....	I-59	31CHGSNBOX.....	D-5
1051/ACSS.....	I-58	1PLD2/02.....	A-47	20AH60.....	N-68	31FWBOX.....	D-3
1051/ACSS/TW.....	I-59	1PLD2/03.....	A-47	2165-NZ.....	I-60	31NWBOX.....	D-3
1052/ACSS.....	I-58	1PLD2/04.....	A-47	24AH60.....	N-68	31SWBOX.....	D-3
1052/ACSS/TW.....	I-59	1PLD2/06.....	A-47	250Q.....	E-83	31X100HEBBOX.....	D-2
1053/ACSS.....	I-58	1PLD2502.....	A-47	25CHENBOX.....	D-3	31X125HEBBOX.....	D-2
1053/ACSS/TW.....	I-59	1PLD2503.....	A-47	25CI.....	E-84	31X150HEBBOX.....	D-2
1054/ACSS.....	I-58	1PLD2504.....	A-47	25CP.....	E-84	31X175HEBBOX.....	D-2
1054/ACSS/TW.....	I-59	1PLD2506.....	A-47	25FWBOX.....	D-3	31X200HEBBOX.....	D-2
1056/ACSS.....	I-58	1PLD3502.....	A-47	25FWSBOX.....	D-6	31X250HEBBOX.....	D-2
1056/ACSS/TW.....	I-59	1PLD3503.....	A-47	25HSSNBOX.....	D-6	31X300HEBBOX.....	D-2
1057/ACSS.....	I-58	1PLD3504.....	A-47	25NWBOX.....	D-3	31X50HEBBOX.....	D-2
1057/ACSS/TW.....	I-59	1PLD3506.....	A-47	25Q.....	E-83	31X62HEBBOX.....	D-2
1059/ACSS.....	I-58	1PLD3508.....	A-47	25SWBOX.....	D-3	31X75HEBBOX.....	D-2
1059/ACSS/TW.....	I-59	1PLD43.....	A-47	25WSSLTBOX.....	D-6	32CI.....	E-84
1060/ACSS.....	I-58	1PLD44.....	A-47	25X100HEBBOX.....	D-2	32CP.....	E-84
1060/ACSS/TW.....	I-59	1PLD6002.....	A-47	25X125HEBBOX.....	D-2	32Q.....	E-83
1061/ACSS.....	I-58	1PLD6003.....	A-47	25X150HEBBOX.....	D-2	34AH60.....	N-69
1061/ACSS/TW.....	I-59	1PLD6004.....	A-47	25X200HEBBOX.....	D-2	36AH60.....	N-69
1062/ACSS.....	I-58	1PLD6005.....	A-47	25X250HEBBOX.....	D-2	38AH60.....	N-69
1062/ACSS/TW.....	I-59	1PLD6006.....	A-47	25X300HEBBOX.....	D-2	38CHENBOX.....	D-3
1063/ACSS.....	I-58	1PLD6008.....	A-47	25X50HEBBOX.....	D-2	38FWBOX.....	D-3
1063/ACSS/TW.....	I-59	1PLO2/02.....	A-47	25X62HEBBOX.....	D-2	38FWSSBOX.....	D-6
1065/ACSS.....	I-58	1PLO2502.....	A-47	25X75HEBBOX.....	D-2	38HGSN009BOX.....	D-5
1065/ACSS/TW.....	I-59	1PLO3502.....	A-47	27AH60.....	N-68	38HGSNBOX.....	D-5
1066/ACSS.....	I-58	1PLO42.....	A-47	3050/ACSS.....	I-58	38HSSNBOX.....	D-6
1066/ACSS/TW.....	I-59	1PLO6002.....	A-47	3050/ACSS/TW.....	I-59	38NWBOX.....	D-3
1067/ACSS.....	I-58	200Q.....	E-83	3051/ACSS.....	I-58	38NWGSBOX.....	D-5
1067/ACSS/TW.....	I-59	2050/ACSS.....	I-58	3051/ACSS/TW.....	I-59	38SWBOX.....	D-3
1070/ACSS.....	I-58	2050/ACSS/TW.....	I-59	3052/ACSS.....	I-58	38SWSSMDBOX.....	D-6
1070/ACSS/TW.....	I-59	2050/I.....	I-55	3052/ACSS/TW.....	I-59	38X100HEBBOX.....	D-2
1072/ACSS.....	I-58	2051/ACSS.....	I-58	3053/ACSS.....	I-58	38X125HEBBOX.....	D-2

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
38X125HGSBBOX.....	D-5	50X275HABBOX.....	D-4	5600-1080D.....	I-48	65CI.....	E-84
38X125HSSBBOX.....	D-6	50X275HEBBOX.....	D-2	5600-1082.....	I-48	65CP.....	E-84
38X150HEBBOX.....	D-2	50X300HABBOX.....	D-4	5600-1082D.....	I-48	65Q.....	E-83
38X175HEBBOX.....	D-2	50X300HEBBOX.....	D-2	5600-2020.....	I-49	75AH60.....	N-68
38X200HEBBOX.....	D-2	50X300HSSBBOX.....	D-6	5600-2022.....	I-49	75CHENBOX.....	D-3
38X225HEBBOX.....	D-2	50X325HABBOX.....	D-4	5600-2026.....	I-49	75FWBOX.....	D-3
38X225HGSBBOX.....	D-5	50X325HEBBOX.....	D-2	5600-2028.....	I-49	75HGSNBOX.....	D-5
38X225HSSBBOX.....	D-6	50X350HABBOX.....	D-4	5600-2030.....	I-49	75HSSNBOX.....	D-6
38X250HEBBOX.....	D-2	50X350HEBBOX.....	D-2	5600-2032.....	I-49	75NWBOX.....	D-3
38X250HSSBBOX.....	D-6	50X375HABBOX.....	D-4	5600-2040.....	I-49	75NWGSBOX.....	D-5
38X275HEBBOX.....	D-2	50X375HEBBOX.....	D-2	5600-2042.....	I-49	75SWBOX.....	D-3
38X275HGSBBOX.....	D-5	50X400HABBOX.....	D-4	5600-2044.....	I-49	75X125HGSBBOX.....	D-5
38X275HSSBBOX.....	D-6	50X400HEBBOX.....	D-2	5600-2050.....	I-49	75X200HGSBBOX.....	D-5
38X300HEBBOX.....	D-2	50X425HABBOX.....	D-4	5600-2052.....	I-49	75X300HSSBBOX.....	D-6
38X325HEBBOX.....	D-2	50X450HABBOX.....	D-4	5600-2054.....	I-49	75X500HGSBBOX.....	D-5
38X350HGSBBOX.....	D-2	50X450HEBBOX.....	D-2	5600-2056.....	I-49	75X600HGSBBOX.....	D-5
38X400HEBBOX.....	D-2	50X500HABBOX.....	D-4	5600-2058.....	I-49	76AH60.....	N-68
38X450HEBBOX.....	D-2	50X500HEBBOX.....	D-2	5600-2060.....	I-49	9050/ACSS.....	I-58
38X500HEBBOX.....	D-2	50X550HABBOX.....	D-4	5600-2062.....	I-49	9050/ACSS/TW.....	I-59
38X50HEBBOX.....	D-2	50X550HEBBOX.....	D-2	5600-2064.....	I-49	9051/ACSS.....	I-58
38X62HEBBOX.....	D-2	50X600HEBBOX.....	D-2	5600-2066.....	I-49	9051/ACSS/TW.....	I-59
38X75BWSSBOX.....	D-7	50X75HEBBOX.....	D-2	5600-2070.....	I-49	9052/ACSS.....	I-58
38X75HEBBOX.....	D-2	5600-1020.....	I-47	5600-2072.....	I-49	9052/ACSS/TW.....	I-59
38X81FWGSBOX.....	D-5	5600-1020D.....	I-47	5600-2074.....	I-49	9053/ACSS.....	I-58
38X88HEBBOX.....	D-2	5600-1022.....	I-47	5600-2076.....	I-49	9053/ACSS/TW.....	I-59
3S.....	A-61	5600-1022D.....	I-47	5600-2078.....	I-49	9054/ACSS.....	I-58
3U.....	A-61	5600-1026.....	I-47	5600-2079.....	I-49	9054/ACSS/TW.....	I-59
40AH60.....	N-69	5600-1026D.....	I-47	5600-2080.....	I-49	9056/ACSS.....	I-58
44CHENBOX.....	D-3	5600-1028.....	I-47	5600-2082.....	I-49	9056/ACSS/TW.....	I-59
44FWBOX.....	D-3	5600-1028D.....	I-47	62CHENBOX.....	D-3	9057/ACSS.....	I-58
44NWBOX.....	D-3	5600-1030.....	I-47	62FWBOX.....	D-3	9057/ACSS/TW.....	I-59
44SWBOX.....	D-3	5600-1030D.....	I-47	62FWSSBOX.....	D-6	9059/ACSS.....	I-58
44X150HEBBOX.....	D-2	5600-1032.....	I-47	62HANBOX.....	D-4	9059/ACSS/TW.....	I-59
44X200HEBBOX.....	D-2	5600-1032D.....	I-47	62HGSNBOX.....	D-5	9060/ACSS.....	I-58
45CI.....	E-84	5600-1040.....	I-47	62HSSNBOX.....	D-6	9060/ACSS/TW.....	I-59
45CP.....	E-84	5600-1040D.....	I-47	62NWBOX.....	D-3	9061/ACSS.....	I-58
45Q.....	E-83	5600-1042.....	I-47	62NWGSBOX.....	D-5	9061/ACSS/TW.....	I-59
4S.....	A-61	5600-1042D.....	I-47	62SWALBOX.....	D-4	9062/ACSS.....	I-58
4U.....	A-61	5600-1044.....	I-47	62SWBOX.....	D-3	9062/ACSS/TW.....	I-59
500Q.....	E-83	5600-1044D.....	I-47	62SWSSMDBOX.....	D-6	9063/ACSS.....	I-58
50CHENBOX.....	D-3	5600-1050.....	I-47	62X100HEBBOX.....	D-2	9063/ACSS/TW.....	I-59
50FWBOX.....	D-3	5600-1050D.....	I-47	62X100HGSBBOX.....	D-5	9065/ACSS.....	I-58
50FWSSBOX.....	D-6	5600-1052.....	I-47	62X125HEBBOX.....	D-2	9065/ACSS/TW.....	I-59
50HANBOX.....	D-4	5600-1052D.....	I-47	62X131FWGSBOX.....	D-5	9066/ACSS.....	I-58
50HGSNBOX.....	D-5	5600-1054.....	I-47	62X150HEBBOX.....	D-2	9066/ACSS/TW.....	I-59
50HSSNBOX.....	D-6	5600-1054D.....	I-47	62X175HABBOX.....	D-4	9067/ACSS.....	I-58
50NWBOX.....	D-3	5600-1056.....	I-47	62X175HEBBOX.....	D-2	9067/ACSS/TW.....	I-59
50NWGSBOX.....	D-5	5600-1056D.....	I-47	62X175HGSBBOX.....	D-5	9070/ACSS.....	I-58
50SWALBOX.....	D-4	5600-1058.....	I-48	62X200HABBOX.....	D-4	9070/ACSS/TW.....	I-59
50SWBOX.....	D-3	5600-1058D.....	I-48	62X200HEBBOX.....	D-2	9072/ACSS.....	I-58
50SWSSMDBOX.....	D-6	5600-1060.....	I-47	62X225HABBOX.....	D-4	9072/ACSS/TW.....	I-59
50X100HEBBOX.....	D-2	5600-1060D.....	I-47	62X225HEBBOX.....	D-2	9073/ACSS.....	I-58
50X100HGSBBOX.....	D-5	5600-1062.....	I-47	62X250HABBOX.....	D-4	9073/ACSS/TW.....	I-59
50X106BWSSBOX.....	D-7	5600-1062D.....	I-47	62X250HEBBOX.....	D-2	9074/ACSS.....	I-58
50X106FWGSBOX.....	D-5	5600-1064.....	I-48	62X275HEBBOX.....	D-2	9074/ACSS/TW.....	I-59
50X125HEBBOX.....	D-2	5600-1064D.....	I-48	62X300HABBOX.....	D-4	9075/ACSS.....	I-58
50X150HABBOX.....	D-4	5600-1066.....	I-48	62X300HEBBOX.....	D-2	9075/ACSS/TW.....	I-59
50X150HEBBOX.....	D-2	5600-1066D.....	I-48	62X300HSSBBOX.....	D-6	9076/ACSS.....	I-58
50X150HGSBBOX.....	D-5	5600-1070.....	I-48	62X325HEBBOX.....	D-2	9076/ACSS/TW.....	I-59
50X175HABBOX.....	D-4	5600-1070D.....	I-48	62X350HABBOX.....	D-4	90CI.....	E-84
50X175HEBBOX.....	D-2	5600-1072.....	I-48	62X350HEBBOX.....	D-2	90Q.....	E-83
50X200HABBOX.....	D-4	5600-1074.....	I-48	62X400HABBOX.....	D-4	9165-NZ.....	I-60
50X200HEBBOX.....	D-2	5600-1074D.....	I-48	62X400HEBBOX.....	D-2	ACC.....	E-132
50X200HGSBBOX.....	D-5	5600-1076.....	I-48	62X450HABBOX.....	D-4	ACC-F1-270.....	E-133
50X200HSSBBOX.....	D-6	5600-1076D.....	I-48	62X450HEBBOX.....	D-2	ACC-F2-90.....	E-133
50X225HABBOX.....	D-4	5600-1078.....	I-48	62X500HABBOX.....	D-4	ACC-F4-90.....	E-133
50X225HEBBOX.....	D-2	5600-1078D.....	I-48	62X500HEBBOX.....	D-2	ACC-F90-1.....	E-133
50X250HABBOX.....	D-4	5600-1079.....	I-48	62X550HABBOX.....	D-4	ACC-FBC.....	E-134, G-30
50X250HEBBOX.....	D-2	5600-1079D.....	I-48	62X600HABBOX.....	D-4	ACC-FLD.....	E-132
50X250HSSBBOX.....	D-6	5600-1080.....	I-48	62X600HEBBOX.....	D-2	ACC-FPV.....	E-132

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
ACC-PV.....	E-132	B-1225-H.....	E-100	B-1581.....	E-93	B-2159.....	E-93
ACC-R2.....	E-133	B-1226-H.....	E-100	B-1582.....	E-93	B-2160.....	E-93
ACC-R2-E.....	E-133	B-1228-H.....	E-100	B-1583.....	E-93	B-2161.....	E-93
ACC-R4.....	E-133	B-1270.....	E-89	B-1584.....	E-93	B-2162.....	E-93
ACC-RBC15.....	E-133	B-1271.....	E-89	B-1586.....	E-93	B-2163.....	E-93
ACE-1P.....	E-117	B-1272.....	E-89	B-1587.....	E-93	B-2164.....	E-93
ACE-2C.....	E-117	B-1273.....	E-89	B-1588.....	E-93	B-2165.....	E-93
ACE-2P.....	E-117	B-1274.....	E-89	B-1589.....	E-93	B-2189.....	E-100
ACE-3C.....	E-117	B-1275.....	E-89	B-1593.....	E-93	B-2199.....	E-97
ACE-3C-1GND.....	E-117	B-1276.....	E-89	B-1594.....	E-93	B-2200.....	E-97
ACE-3C-DF.....	E-117	B-1277.....	E-89	B-1595.....	E-93	B-221.....	E-86
ACE-3P.....	E-117	B-1278.....	E-89	B-1596.....	E-93	B-223.....	E-86
ACE-4C.....	E-117	B-1279.....	E-89	B-1597.....	E-93	B-2235.....	E-95
ACE-4P.....	E-117	B-1280.....	E-89	B-1601.....	E-93	B-224.....	E-86
ACE-PT.....	E-117	B-1281.....	E-89	B-1602.....	E-93	B-225.....	E-86
ACE-PTD.....	E-117	B-1282.....	E-89	B-1603.....	E-93	B-226.....	E-86
AGSKIT2.....	A-34	B-1283.....	E-89	B-1604.....	E-93	B-227.....	E-86
AGSKIT250.....	A-34	B-1284.....	E-89	B-1605.....	E-93	B-228.....	E-86
ALFLUIDGAL.....	N-101	B-1285.....	E-89	B-1606.....	E-93	B-229.....	E-86
ALFLUIDQT.....	N-101	B-1286.....	E-89	B-1610.....	E-93	B-230.....	E-86
AMS-0.....	A-33	B-1287.....	E-89	B-1611.....	E-93	B-231.....	E-86
AMS-1000.....	A-33	B-1288.....	E-89	B-1613.....	E-102	B-232.....	E-86
AMS-2.....	A-33	B-1289.....	E-89	B-1614.....	E-102	B-2320.....	E-95
AMS-250.....	A-33	B-1290.....	E-89	B-1615.....	E-102	B-234.....	E-86
AMS-350.....	A-33	B-1291.....	E-89	B-1616.....	E-102	B-235.....	E-86
AMS-4/0.....	A-33	B-1292.....	E-89	B-1617.....	E-102	B-236.....	E-86
AMS-500.....	A-33	B-1293.....	E-89	B-1618.....	E-102	B-237.....	E-86
AMS-750.....	A-33	B-1294.....	E-89	B-1619.....	E-102	B-238.....	E-86
ASA1000U.....	C-141	B-1295.....	E-89	B-1620.....	E-102	B-239.....	E-86
ASA250U.....	C-141	B-1296.....	E-89	B-1626.....	E-101	B-240.....	E-86
ASA800U.....	C-141	B-1297.....	E-89	B-1627.....	E-101	B-241.....	E-86
AYP1.....	C-207	B-1298.....	E-89	B-1628.....	E-101	B-242.....	E-86
AYP1/0.....	C-207	B-1299.....	E-89	B-1629.....	E-101	B-243.....	E-86
AYP2.....	C-207	B-1300.....	E-89	B-1630.....	E-101	B-244.....	E-86
AYP250.....	C-207	B-1301.....	E-89	B-1631.....	E-101	B-245.....	E-86
AYP350.....	C-207	B-1302.....	E-89	B-1632.....	E-101	B-2450.....	E-95
AYP4.....	C-207	B-1303.....	E-89	B-1633.....	E-101	B-246.....	E-86
AYP500.....	C-207	B-1304.....	E-89	B-1634.....	E-101	B-247.....	E-86
AYP6.....	C-207	B-1305.....	E-89	B-1635.....	E-101	B-2476.....	E-99
AYP750.....	C-207	B-1306.....	E-89	B-1636.....	E-101	B-2477.....	E-99
AYP900.....	C-207	B-1307.....	E-89	B-1637.....	E-101	B-2478.....	E-99
AYPO1000.....	C-207	B-1308.....	E-89	B-1638.....	E-101	B-248.....	E-86
AYPO2/0.....	C-207	B-1309.....	E-89	B-1639.....	E-101	B-2480.....	E-99
AYPO250.....	C-207	B-1310.....	E-89	B-1640.....	E-101	B-2480-S.....	E-99
AYPO3/0.....	C-207	B-1311.....	E-90	B-1641.....	E-101	B-2482.....	E-99
AYPO300.....	C-207	B-1313.....	E-90	B-1642.....	E-101	B-2483.....	E-99
AYPO350.....	C-207	B-1314.....	E-90	B1643.....	E-101	B-2484.....	E-99
AYPO4/0.....	C-207	B-1315.....	E-90	B-1644.....	E-101	B-2486.....	E-99
AYPO400.....	C-207	B-1316.....	E-90	B-1645.....	E-101	B-2487.....	E-99
AYPO500.....	C-207	B-1317.....	E-90	B-1646.....	E-101	B-2488.....	E-99
AYPO600.....	C-207	B-1318.....	E-90	B-1648.....	E-101	B-249.....	E-86
AYPO750.....	C-207	B-1319.....	E-90	B-1649.....	E-101	B-2490.....	E-99
AYPO900.....	C-207	B-1320.....	E-90	B-1650.....	E-101	B-2491.....	E-99
B-106.....	E-111	B-1321.....	E-90	B1CD.....	N-37	B-2493.....	E-99
B106-32.....	E-112	B-1322.....	E-90	B-205.....	E-85	B-2494.....	E-99
B106-37.....	E-112	B-1323.....	E-90	B-206.....	E-85	B-2495.....	E-99
B106-41.....	E-112	B-1324.....	E-90	B-207.....	E-85	B-2497.....	E-99
B-107.....	E-111	B-1325.....	E-90	B-208.....	E-85	B-2498.....	E-99
B107-32.....	E-112	B-1326.....	E-90	B-2084.....	E-95	B-250.....	E-86
B-1208.....	E-90	B-1327.....	E-90	B-209.....	E-85	B-2506.....	E-97
B-1212.....	E-95	B-1328.....	E-90	B-210.....	E-85	B-2507.....	E-97
B-1215.....	E-100	B-1329.....	E-90	B-211.....	E-85	B-2509.....	E-97
B-1216.....	E-100	B-1330.....	E-90	B-213.....	E-85	B-251.....	E-86
B-1218.....	E-100	B-1331.....	E-90	B-214.....	E-85	B-2510.....	E-95
B-1219.....	E-100	B-1332.....	E-90	B-215.....	E-85	B-2511.....	E-97
B-1220.....	E-100	B-1333.....	E-90	B2154.....	E-93	B-252.....	E-86
B-1221.....	E-100	B-1334.....	E-90	B-2155.....	E-93	B-253.....	E-86
B-1222.....	E-100	B-1335.....	E-90	B-2156.....	E-93	B-254.....	E-86
B-1223.....	E-100	B-1336.....	E-90	B-2157.....	E-93	B-2540.....	E-100
B-1224.....	E-100	B-15.....	B-15	B-2158.....	E-93	B-2542.....	E-97

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
B-255	E-86	B-284	E-86	B-427	E-87	B-501	E-91
B-2558	E-95	B-285	E-86	B-428	E-87	B-502	E-91
B-256	E-86	B-286	E-86	B-429	E-87	B-5021	E-86
B-2566	E-94	B-287	E-86	B-430	E-87	B-503	E-91
B-2567	E-102	B-288	E-86	B-431	E-87	B-504	E-91
B-2568	E-102	B-289	E-86	B-432	E-87	B-505	E-91
B-257	E-86	B28D	N-37	B-433	E-87	B-506	E-91
B-258	E-86	B-290	E-86	B-434	E-87	B-5065	E-98
B-2583	E-99	B-291	E-86	B-435	E-87	B-507	E-91
B-2583-S	E-99	B-293	E-86	B-436	E-87	B-508	E-91
B-259	E-86	B-294	E-86	B-437	E-87	B-509	E-91
B25D	N-37	B-295	E-86	B-438	E-87	B-510	E-91
B-260	E-86	B-296	E-86	B-439	E-87	B-511	E-91
B-261	E-86	B-297	E-86	B-440	E-87	B-513	E-91
B-262	E-86	B-298	E-86	B-441	E-87	B-514	E-91
B-263	E-86	B29D	N-37	B-442	E-87	B-515	E-91
B-264	E-86	B2CD	N-37	B-443	E-87	B-516	E-91
B-265	E-86	B2D12	E-63	B-444	E-87	B-517	E-91
B-266	E-86	B2D12N	E-63	B-445	E-87	B-518	E-91
B-267	E-86	B2E12	E-63	B-446	E-87	B-519	E-91
B-268	E-86	B2E12N	E-63	B-447	E-87	B-520	E-91
B-2687	E-88	B2F12	E-63	B-448	E-87	B-521	E-91
B-2689	E-88	B2F12N	E-63	B-449	E-87	B-523	E-91
B-269	E-86	B2G12N	E-63	B-450	E-87	B-524	E-91
B-2690	E-88	B30D	N-37	B-451	E-87	B-525	E-91
B-2691	E-88	B31D	N-37	B-452	E-87	B-526	E-91
B-2692	E-88	B32D	N-37	B-453	E-87	B-527	E-91
B-2693	E-88	B-333	E-86	B-454	E-87	B-528	E-91
B-2694	E-88	B370320-01	E-84	B-455	E-87	B-529	E-91
B-2695	E-88	B370320-02	E-84	B-456	E-87	B-5294	E-94
B-2696	E-88	B370320-03	E-84	B-457	E-87	B-530	E-91
B-2697	E-88	B38-0101-00	E-114	B-458	E-87	B-531	E-91
B-2698	E-88	B38-0101-01	E-114	B-459	E-87	B-5321	E-93
B-2699	E-88	B38-0135-01	E-113	B-460	E-87	B-533	E-91
B26D	N-37	B38-0302-00	E-114	B-461	E-87	B-5330	E-95
B-270	E-86	B38-0302-02	E-114	B-462	E-87	B-5331	E-98
B-2700	E-88	B38-0303-00	E-114	B-463	E-87	B-5332	E-95
B-2701	E-88	B38-0304-00	E-114	B-464	E-87	B-5333	E-95
B-2702	E-88	B38-0305-00	E-114, F-4	B-465	E-87	B-5334	E-95
B-2703	E-88	B38-0306-00	E-113, E-114	B-466	E-87	B-5335	E-95
B-2704	E-88	B38-0307-00	E-114	B-467	E-87	B-5336	E-95
B-2705	E-88	B38-0308-00	E-114	B-468	E-87	B-5337	E-95
B-2706	E-88	B38-0309-00	E-114	B-469	E-87	B-5338	E-95
B-2707	E-88	B38-0309-01	E-114	B-470	E-87	B-534	E-91
B-2708	E-88	B38-0315-00	E-113	B-471	E-87	B-5340	E-90
B-2709	E-88	B38-0330-00	E-113	B-472	E-87	B-5341	E-95
B-2710	E-88	B38-0904-00	E-114	B-483	E-87	B-5342	E-90
B-2711	E-88	B38-3922-00	E-113, E-114	B-485	E-87	B-535	E-91
B-2712	E-88	B38412900	E-113	B-486	E-87	B-5351	E-95
B-2713	E-88	B38412905	E-113	B-487	E-87	B-5352	E-95
B-2714	E-88	B3D12	E-63	B-488	E-87	B-5353	E-95
B-2715	E-88	B3D12N	E-63	B-489	E-87	B-5359	E-100
B-2716	E-88	B3E12	E-63	B-490	E-87	B-5361	E-100
B-2717	E-88	B3E12N	E-63	B-491	E-87	B-5362	E-100
B-2718	E-88	B3F12	E-63	B-492	E-87	B-5363	E-100
B-2719	E-88	B3F12N	E-63	B-493	E-87	B-537	E-92
B-2747	E-88	B3G12	E-63	B-495	E-91	B-538	E-92
B-2751	E-88	B3G12N	E-63	B-496	E-91	B-5380	E-94
B-2752	E-88	B40-0106-75	E-111	B-497	E-91	B-5389	E-100
B-2753	E-88	B40-0106-76	E-112	B-498	E-91	B-539	E-92
B-2754	E-88	B40-0106-77	E-112	B-499	E-91	B-5390	E-94
B-2755	E-88	B40-0106-78	E-112	B4CD	N-37	B-540	E-92
B-2756	E-88	B40-0319-01	E-113	B4D12	E-63	B-541	E-92
B-2757	E-88	B40-0319-03	E-113	B4D12N	E-63	B-5416	E-94
B-2761	E-102	B40-03657-00	E-111	B4E12	E-63	B-5419	E-102
B-2781	E-100	B40-4431-00	E-112	B4E12N	E-63	B-542	E-92
B27D	N-37	B-423	E-87	B4F12	E-63	B-5428	E-95
B-280	E-86	B-424	E-87	B4F12N	E-63	B-543	E-92
B-282	E-86	B-425	E-87	B4G12N	E-63	B-5432	E-88
B-283	E-86	B-426	E-87	B-500	E-91	B-544	E-92



**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
B-545.....	E-92	B-5709.....	E-89	B-619.....	E-98	B-7605.....	E-104
B-546.....	E-92	B-571.....	E-92	B-620.....	E-98	B-7606.....	E-104
B-547.....	E-92	B-572.....	E-92	B-6208.....	E-95	B-7607.....	E-104
B-5475.....	E-86	B-5722.....	E-94	B-621.....	E-98	B-7608.....	E-104
B-548.....	E-92	B-573.....	E-92	B-622.....	E-98	B-7609.....	E-104
B-549.....	E-92	B-5732.....	E-94	B-624.....	E-98	B-7610.....	E-104
B-550.....	E-92	B-5734.....	E-94	B-625-H.....	E-98	B-7611.....	E-104
B-551.....	E-92	B-5738.....	E-94	B-626-H.....	E-98	B-7612.....	E-104
B-5513.....	E-94	B-574.....	E-92	B-628.....	E-97	B-7613.....	E-104
B-5515.....	E-94	B-5746.....	E-94	B-629.....	E-97	B-7614.....	E-104
B-5517.....	E-95	B-575.....	E-92	B-630.....	E-97	B-7615.....	E-104
B-552.....	E-92	B-5767.....	E-95	B-631.....	E-97	B-7616.....	E-104
B-553.....	E-92	B-577.....	E-92	B-644.....	E-97	B-7617.....	E-104
B-555.....	E-92	B-5777.....	E-94	B-645.....	E-97	B-7618.....	E-104
B-5555.....	E-94	B-578.....	E-92	B-646.....	E-97	B-7619.....	E-104
B-5556.....	E-94	B-5781.....	E-91	B-647.....	E-97	B-7620.....	E-105
B-556.....	E-92	B-579.....	E-92	B-648.....	E-97	B-7621.....	E-105
B-5560.....	E-95	B-5803.....	E-94	B-649.....	E-97	B-7622.....	E-105
B-5561.....	E-94	B-5807.....	E-94	B-650.....	E-97	B-7623.....	E-105
B-557.....	E-92	B-5820.....	E-94	B-652.....	E-97	B-7624.....	E-105
B-5573.....	E-95	B-5821.....	E-94	B-653.....	E-97	B-7625.....	E-105
B-5574.....	E-86	B-5830.....	E-94	B-654.....	E-97	B-7626.....	E-105
B-558.....	E-92	B-5833.....	E-94	B-6552.....	E-90	B-7627.....	E-105
B-559.....	E-92	B-585.....	E-99	B-6630.....	E-93	B-7628.....	E-105
B-560.....	E-92	B-5850.....	E-94	B-6766.....	E-95	B-7629.....	E-105
B-5604.....	E-95	B-5857.....	E-94	B-6906.....	E-93	B-7630.....	E-105
B-561.....	E-92	B-586.....	E-99	B-7075.....	E-97	B-7631.....	E-105
B-5618.....	E-89	B-587.....	E-99	B-7146.....	E-97	B-7632.....	E-105
B-562.....	E-92	B-5877.....	E-94	B-7192.....	E-98	B-7633.....	E-105
B-5623.....	E-85	B-588.....	E-99	B-7500.....	E-103	B-7634.....	E-105
B-5624.....	E-85	B-588-S.....	E-99	B-7501.....	E-103	B-7635.....	E-105
B-5625.....	E-85	B-589.....	E-99	B-7502.....	E-103	B-7636.....	E-105
B-5626.....	E-85	B-590.....	E-99	B-7503.....	E-103	B-7637.....	E-105
B-5627.....	E-90	B-5904.....	E-94	B-7504.....	E-103	B-7638.....	E-105
B-5629.....	E-90	B-591.....	E-99	B-7505.....	E-103	B-7639.....	E-105
B-563.....	E-92	B-5910.....	E-102	B-7506.....	E-103	B-7640.....	E-105
B-5630.....	E-90	B-592.....	E-99	B-7507.....	E-103	B-7641.....	E-105
B-5631.....	E-90	B-593.....	E-99	B-7508.....	E-103	B-7642.....	E-105
B-5632.....	E-90	B-5935.....	E-94	B-7509.....	E-103	B-7643.....	E-105
B-5634.....	E-90	B-594.....	E-99	B-7510.....	E-103	B-7644.....	E-105
B-5635.....	E-90	B-5940.....	E-94	B-7511.....	E-103	B-7645.....	E-105
B-5636.....	E-90	B-5943.....	E-90	B-7512.....	E-103	B-7646.....	E-105
B-5637.....	E-90	B-595.....	E-99	B-7513.....	E-103	B-7647.....	E-105
B-5638.....	E-90	B-596.....	E-99	B-7514.....	E-103	B-7648.....	E-105
B-5639.....	E-90	B-5961.....	E-94	B-7515.....	E-103	B-7649.....	E-105
B-564.....	E-92	B-5963.....	E-94	B-7520.....	E-103	B-7650.....	E-105
B-5640.....	E-95	B-5972.....	E-94	B-7521.....	E-103	B-7651.....	E-105
B-5642.....	E-90	B-598.....	E-99	B-7522.....	E-103	B-7652.....	E-105
B-5644.....	E-90	B-599.....	E-99	B-7523.....	E-103	B-7653.....	E-105
B-5645.....	E-90	B-5992.....	E-94	B-7528.....	E-103	B-7654.....	E-105
B-5652.....	E-90	B-600.....	E-99	B-7529.....	E-103	B-7655.....	E-105
B-5659.....	E-90	B-6002.....	E-95	B-7530.....	E-103	B-7656.....	E-105
B-566.....	E-92	B-6003.....	E-94	B-7531.....	E-103	B-7657.....	E-105
B-5660.....	E-93	B-602.....	E-98	B-7588.....	E-104	B-7658.....	E-105
B-5667.....	E-95	B-6025.....	E-94	B-7589.....	E-104	B-7659.....	E-105
B-5668.....	E-90	B-603.....	E-98	B-7590.....	E-104	B-7708.....	E-106
B-567.....	E-92	B-604.....	E-98	B-7591.....	E-104	B-7709.....	E-106
B-5676.....	E-90	B-6046.....	E-90	B-7592.....	E-104	B-7710.....	E-106
B-5677.....	E-95	B-6048.....	E-94	B-7593.....	E-104	B-7711.....	E-106
B-5679.....	E-90	B-605.....	E-98	B-7594.....	E-104	B-7712.....	E-106
B-5680.....	E-90	B-6051.....	E-95	B-7595.....	E-104	B-7713.....	E-106
B-5682.....	E-90	B-6060.....	E-102	B-7596.....	E-104	B-7714.....	E-106
B-5684.....	E-90	B-6061.....	E-102	B-7597.....	E-104	B-7715.....	E-106
B-5686.....	E-90	B-6067.....	E-102	B-7598.....	E-104	B-7716.....	E-106
B-5688.....	E-90	B-6072.....	E-102	B-7599.....	E-104	B-7717.....	E-106
B-569.....	E-92	B-6114.....	E-97	B-7600.....	E-104	B-7718.....	E-106
B-5698.....	E-94	B-616.....	E-98	B-7601.....	E-104	B-7719.....	E-106
B-5699.....	E-94	B-6165.....	E-94	B-7602.....	E-104	B-7720.....	E-106
B-570.....	E-92	B-617.....	E-98	B-7603.....	E-104	B-7721.....	E-106
B-5702.....	E-95	B-618.....	E-98	B-7604.....	E-104	B-7722.....	E-106

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
B-7723	E-106	B-8415	E-91	BA14EF8M	B-28	BB024SSL12LT516	E-66
B-7724	E-106	B-8422	E-91	BA14EL10	B-33	BB024SSL6LT14	E-66
B-7725	E-106	B-8423	E-98	BA14EL10M	B-33	BB024SSL6LT38	E-66
B-7726	E-106	B-8426	E-91	BA14EL8	B-33	BB024SSL9LT516	E-66
B-7727	E-106	B-8428	E-95	BA14EL8M	B-33	BB024SSL6T14	E-66
B-7728	E-106	B-8434	E-92	BA14EZ10	B-42	BB024SSL9LT14	E-66
B-7729	E-106	B-8435	E-92	BA14EZ2	B-42	BB024SSL9LT38	E-66
B-7730	E-106	B-8441	E-92	BA14EZ6	B-42	BB024SSL9LT516	E-66
B-7731	E-106	B-8442	E-92	BA14EZ8	B-42	BB036L12T14	E-61
B-7732	E-106	B-8451	E-95	BA16E10	B-8	BB036L18T14	E-61
B-7733	E-106	B-8452	E-92	BA16E10M	B-8	BB036L9T14	E-61
B-7734	E-106	B-8454	E-92	BA16E14	B-8	BB048L12LT12	E-64
B-7735	E-106	B-8461	E-95	BA16E14M	B-8	BB048L12LT14	E-64
B-7736	E-106	B-8512	E-100	BA16E38	B-8	BB048L12LT38	E-64
B-7737	E-106	B-8718	E-100	BA16E38M	B-8	BB048L18LT12	E-64
B-7738	E-106	B-8726	E-95	BA16E4	B-8	BB048L18LT14	E-64
B-7739	E-106	B-8802	E-95	BA16E4M	B-8	BB048L18LT38	E-64
B-7884	E-107	B-8833	E-99	BA16E6	B-8	BB048L24LT12	E-64
B-7885	E-107	B-8882	E-90	BA16E6M	B-8	BB048L24LT14	E-64
B-7886	E-107	B-9021	E-99	BA16E8	B-8	BB048L24LT38	E-64
B-7887	E-107	B-9029	E-100	BA16E8M	B-8	BB048L6T14	E-61
B-7888	E-107	B-9233	E-99	BA16EF10	B-28	BB048L9T14	E-61
B-7889	E-107	B-9233-S	E-99	BA16EF10M	B-28	BB067L6T14	E-61
B-7890	E-107	B-9253	E-102	BA16EF2	B-28	BB067L9T14	E-61
B-7891	E-107	BA10E10	B-8	BA16EF2M	B-28	BBB-14210A	E-78
B-7892	E-107	BA10E10M	B-8	BA16EF6	B-28	BBB-14224B	E-78
B-7893	E-107	BA10E14	B-8	BA16EF6M	B-28	BBB-14410C	E-78
B-7894	E-107	BA10E14M	B-8	BA16EF8	B-28	BBB-14410D	E-78
B-7895	E-107	BA10E38	B-8	BA16EF8M	B-28	BBB-14412E	E-78
B-7896	E-107	BA10E38M	B-8	BA16EL10	B-33	BBB-14412F	E-78
B-7897	E-107	BA10E516	B-8	BA16EL10M	B-33	BBB-14416G	E-78
B-7898	E-107	BA10E6	B-8	BA16EL6	B-33	BBB-14416H	E-78
B-7899	E-107	BA10E6M	B-8	BA16EL6M	B-33	BBB-14420J	E-78
B-7900	E-107	BA10E8	B-8	BA16EL8	B-33	BBB412UD	E-78
B-7901	E-107	BA10E8M	B-8	BA16EL8M	B-33	BBB-424-UD	E-78
B-7902	E-107	BA10EF10	B-28	BA16EZ10	B-42	BBB-HR19	E-78
B-7903	E-107	BA10EF10M	B-28	BA16EZ2	B-42	BBB-VR36	E-78
B-7904	E-107	BA10EF6	B-28	BA16EZ6	B-42	BC25	H-71
B-7905	E-107	BA10EF6M	B-28	BA16EZ8	B-42	BC28	H-71
B-7906	E-107	BA10EF8	B-28	BA-200	E-115	BC2C	H-71
B-7907	E-107	BA10EF8M	B-28	BA-201	E-115	BCC1000CUAL	N-83
B-7908	E-107	BA10EL10	B-33	BA-202	E-115	BCCBAT12V	N-83
B-7909	E-107	BA10EL10M	B-33	BA-203	E-115	BCCCASE	N-83
B-7910	E-107	BA10EL6	B-33	BA-204	E-115	BCCCHGR	N-83
B-7911	E-107	BA10EL6M	B-33	BA-205	E-115	BD12	E-62
B-7912	E-107	BA10EL8	B-33	BA-207	E-115	BD12N	E-62
B-7913	E-107	BA10EL8M	B-33	BA-208	E-115	BD12NB	E-65
B-7914	E-107	BA10EZ10	B-42	BA-209	E-115	BD18	E-62
B-7915	E-107	BA10EZ6	B-42	BA-211	E-115	BD18N	E-62
B-7916	E-107	BA10EZ8	B-42	BA-212	E-115	BD18NB	E-65
B-7917	E-107	BA14E10	B-8	BA-213	E-115	BD24	E-62
B-7918	E-107	BA14E10M	B-8	BA-214	E-115	BD24N	E-62
B-7919	E-107	BA14E14	B-8	BA-215	E-115	BD24NB	E-65
B-7920	E-107	BA14E14M	B-8	BA-240	E-115	BD6T14	E-61
B-7921	E-107	BA14E38	B-8	BAGCNVS5X9X24	N-85	BD9T14	E-61
B-7922	E-107	BA14E4	B-8	BAT18V5AHLJ	N-8 - N-15,	BDALHC112350	A-53
B-7923	E-107	BA14E4M	B-8		N-76 - N-80	BDALHC11500	A-53
B-8011	E-95	BA14E516	B-8	BAT18VLI	N-8 - N-19,	BDALHC16350	A-53
B-8027	E-95	BA14E516M	B-8		N-76 - N-82	BDALHC16500	A-53
B-8165	E-100	BA14E6	B-8	BB024L12LT14	E-64	BDALHC212500	A-53
B-8214	E-95	BA14E6L	B-33	BB024L12LT14B	E-65	BDALHC22350	A-53
B-8294	E-95	BA14E6LM	B-33	BB024L18LT14	E-64	BDALHC22500	A-53
B-8359	E-102	BA14E6M	B-8	BB024L18LT14B	E-65	BDALHC22600	A-54
B-8379	E-98	BA14E8	B-8	BB024L24LT14	E-64	BDALHC24500	A-54
B-8381	E-98	BA14E8M	B-8	BB024L24LT14B	E-65	BDALHC26350	A-53
B-8402	E-91	BA14EF10	B-28	BB024L6T14	E-61	BDALHC26500	A-54
B-8403	E-91	BA14EF10M	B-28	BB024L8LT14	E-64	BDALHCEB	A-54
B-8410	E-98	BA14EF2	B-28	BB024L9T14	E-61	BDAMHC112/0	A-52
B-8413	E-98	BA14EF6	B-28	BB024SSL12LT14	E-66	BDAMHC11350	A-52
B-8414	E-91	BA14EF8	B-28	BB024SSL12LT38	E-66	BDAMHC14500	A-52

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
BDAMHC162/0	A-52	BDBLCS6K3FS	A-50	BDBMCS2N1FS	A-49	BDBSCSCOVER	A-48
BDAMHC162500	A-52	BDBLCS6KA	A-50	BDBMCS2N1FSKIT	A-49	BDBSHCCOVER	A-51
BDAMHC222/0	A-52	BDBLCS6R1	A-50	BDBMCS2N2	A-49	BDCSHC112/01	A-51
BDAMHC262/0	A-52	BDBLCS6R1FS	A-50	BDBMCS2N2FS	A-49	BDCSHC142/01	A-51
BDAMHCEB	A-52	BDBLCS6R1FSKIT	A-50	BDBMCS2N3	A-49	BDESS750-3	K-68
BDASHC112/01	A-51	BDBLCS6R2	A-50	BDBMCS2N3FS	A-49	BDESS750-4	K-68
BDASHC142/01	A-51	BDBLCS6R2FS	A-50	BDBMCS2NA	A-49	BDESS750-5	K-68
BDASHCEB	A-51	BDBLCS6R3	A-50	BDBMCS3U1	A-49	BDESS750-6	K-68
BDBLCS3A1	A-50	BDBLCS6R3FS	A-50	BDBMCS3U1FS	A-49	BDESS750-7	K-68
BDBLCS3A1FS	A-50	BDBLCS6RA	A-50	BDBMCS3U1FSKIT	A-49	BDESS750-8	K-68
BDBLCS3A1FSKIT	A-50	BDBLCS6V1	A-50	BDBMCS3U2	A-49	BDSC1	F-5
BDBLCS3A2	A-50	BDBLCS6V1FS	A-50	BDBMCS3U2FS	A-49	BDSC5	F-5
BDBLCS3A2FS	A-50	BDBLCS6V1FSKIT	A-50	BDBMCS3U3	A-49	BDT1	E-48
BDBLCS3A3	A-50	BDBLCS6V2	A-50	BDBMCS3U3FS	A-49	BDTIBB	E-49
BDBLCS3A3FS	A-50	BDBLCS6V2FS	A-50	BDBMCS3UA	A-49	BE12	E-62
BDBLCS3AA	A-50	BDBLCS6V3	A-50	BDBMCS5F1	A-49	BE12N	E-62
BDBLCS3K1	A-50	BDBLCS6V3FS	A-50	BDBMCS5F1FS	A-49	BE12T58	E-61
BDBLCS3K1FS	A-50	BDBLCS6VA	A-50	BDBMCS5F1FSKIT	A-49	BE12T716	E-61
BDBLCS3K1FSKIT	A-50	BDBLCSCOVER	A-48	BDBMCS5F2	A-49	BE18	E-62
BDBLCS3K2	A-50	BDBLHC1123501	A-53	BDBMCS5F2FS	A-49	BE18N	E-62
BDBLCS3K2FS	A-50	BDBLHC1123502	A-53	BDBMCS5F3	A-49	BE18T58	E-61
BDBLCS3K3	A-50	BDBLHC1123503	A-53	BDBMCS5F3FS	A-49	BE18T716	E-61
BDBLCS3K3FS	A-50	BDBLHC115001	A-53	BDBMCS5FA	A-49	BE24	E-62
BDBLCS3KA	A-50	BDBLHC115002	A-53	BDBMCS5M1	A-49	BE24N	E-62
BDBLCS4K1	A-50	BDBLHC115003	A-53	BDBMCS5M1FS	A-49	BE24T58	E-61
BDBLCS4K1FS	A-50	BDBLHC163501	A-53	BDBMCS5M1FSKIT	A-49	BE6T716	E-61
BDBLCS4K1FSKIT	A-50	BDBLHC163502	A-53	BDBMCS5M2	A-49	BEC2-14	E-122
BDBLCS4K2	A-50	BDBLHC163503	A-53	BDBMCS5M2FS	A-49	BEC2-14BK	E-122
BDBLCS4K2FS	A-50	BDBLHC165001	A-53	BDBMCS5M3	A-49	BEC2-14CL	E-122
BDBLCS4K3	A-50	BDBLHC165002	A-53	BDBMCS5M3FS	A-49	BEC2-516	E-122
BDBLCS4K3FS	A-50	BDBLHC165003	A-53	BDBMCS5MA	A-49	BEC2-516BK	E-122
BDBLCS4KA	A-50	BDBLHC2125001	A-53	BDBMCSCOVER	A-48	BEC2-516CL	E-122
BDBLCS4T1	A-50	BDBLHC2125002	A-53	BDBMHC112/01	A-52	BECBSD	N-63
BDBLCS4T1FS	A-50	BDBLHC2125003	A-53	BDBMHC112/02	A-52	BECNVD	N-63
BDBLCS4T1FSKIT	A-50	BDBLHC223501	A-53	BDBMHC112/03	A-52	BF12	E-62
BDBLCS4T2	A-50	BDBLHC223502	A-53	BDBMHC113501	A-52	BF12N	E-62
BDBLCS4T2FS	A-50	BDBLHC223503	A-53	BDBMHC113502	A-52	BF12T716	E-61
BDBLCS4T3	A-50	BDBLHC225001	A-53	BDBMHC113503	A-52	BF18	E-62
BDBLCS4T3FS	A-50	BDBLHC225002	A-53	BDBMHC145001	A-52	BF18N	E-62
BDBLCS4TA	A-50	BDBLHC225003	A-53	BDBMHC145002	A-52	BF18T716	E-61
BDBLCS5K1	A-50	BDBLHC226001	A-54	BDBMHC145003	A-52	BF24	E-62
BDBLCS5K1FS	A-50	BDBLHC226002	A-54	BDBMHC162/01	A-52	BF24N	E-62
BDBLCS5K1FSKIT	A-50	BDBLHC226003	A-54	BDBMHC162/02	A-52	BF6T716	E-61
BDBLCS5K2	A-50	BDBLHC245001	A-54	BDBMHC162/03	A-52	BG12	E-62
BDBLCS5K2FS	A-50	BDBLHC245002	A-54	BDBMHC1625001	A-52	BG12N	E-62
BDBLCS5K3	A-50	BDBLHC245003	A-54	BDBMHC1625002	A-52	BG12T12	E-61
BDBLCS5K3FS	A-50	BDBLHC263501	A-53	BDBMHC1625003	A-52	BG12T716	E-61
BDBLCS5KA	A-50	BDBLHC263502	A-53	BDBMHC222/01	A-52	BG18	E-62
BDBLCS5W1	A-50	BDBLHC263503	A-53	BDBMHC222/02	A-52	BG18N	E-62
BDBLCS5W1FS	A-50	BDBLHC265001	A-54	BDBMHC222/03	A-52	BG24	E-62
BDBLCS5W1FSKIT	A-50	BDBLHC265002	A-54	BDBMHC262/01	A-52	BG24N	E-62
BDBLCS5W2	A-50	BDBLHC265003	A-54	BDBMHC262/02	A-52	BG6T716	E-61
BDBLCS5W2FS	A-50	BDBLHC265007	A-54	BDBMHC262/03	A-52	BG8T716	E-61
BDBLCS5W3	A-50	BDBMCS1F1	A-49	BDBMHCCOVER	A-52	BGBL-1/0	A-25
BDBLCS5W3FS	A-50	BDBMCS1F1FS	A-49	BDBSCS1C1	A-49	BGBL-250	A-25
BDBLCS5WA	A-50	BDBMCS1F1FSKIT	A-49	BDBSCS1C1FS	A-49	BGBL-4	A-25
BDBLCS6A1	A-50	BDBMCS1F2	A-49	BDBSCS1C1FSKIT	A-49	BGBL4SS	A-25
BDBLCS6A1FS	A-50	BDBMCS1F2FS	A-49	BDBSCS1C2	A-49	BGBS4	E-39
BDBLCS6A1FSKIT	A-50	BDBMCS1F3	A-49	BDBSCS1C2FS	A-49	BGBS4BULK	E-39
BDBLCS6A2	A-50	BDBMCS1F3FS	A-49	BDBSCS1C3	A-49	BGBS5	E-39
BDBLCS6A2FS	A-50	BDBMCS1FA	A-49	BDBSCS1C3FS	A-49	BGBS5BULK	E-39
BDBLCS6A3	A-50	BDBMCS2F1	A-49	BDBSCS1CA	A-49	BHSG1100	F-17
BDBLCS6A3FS	A-50	BDBMCS2F1FS	A-49	BDBSCS1P1	A-49	BIBD2/0-10	A-45
BDBLCS6AA	A-50	BDBMCS2F1FSKIT	A-49	BDBSCS1P1FS	A-49	BIBD2/010FX	A-39
BDBLCS6K1	A-50	BDBMCS2F2	A-49	BDBSCS1P1FSKIT	A-49	BIBD2/010FXMT	A-40
BDBLCS6K1FS	A-50	BDBMCS2F2FS	A-49	BDBSCS1P2	A-49	BIBD2/010MT	A-46
BDBLCS6K1FSKIT	A-50	BDBMCS2F3	A-49	BDBSCS1P2FS	A-49	BIBD2/0-12	A-45
BDBLCS6K2	A-50	BDBMCS2F3FS	A-49	BDBSCS1P3	A-49	BIBD2/012FX	A-39
BDBLCS6K2FS	A-50	BDBMCS2FA	A-49	BDBSCS1P3FS	A-49	BIBD2/012FXMT	A-40
BDBLCS6K3	A-50	BDBMCS2N1	A-49	BDBSCS1PA	A-49	BIBD2/012MT	A-46

## ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
BIBD2/0-14.....	A-45	BIBD3508FX.....	A-41	BIBS2/03FX.....	A-39	BIBS3508FXMT.....	A-41
BIBD2/014FX.....	A-39	BIBD3508FXMT.....	A-41	BIBS2/0-4.....	A-44	BIBS3508MT.....	A-46
BIBD2/0-2.....	A-45	BIBD3508MT.....	A-46	BIBS2/04FX.....	A-39	BIBS4-3.....	A-44
BIBD2/02FX.....	A-39	BIBD4-2.....	A-45	BIBS2/04FXMT.....	A-40	BIBS43FX.....	A-39
BIBD2/0-3.....	A-45	BIBD42FX.....	A-39	BIBS2/04MT.....	A-46	BIBS4-4.....	A-44
BIBD2/03FX.....	A-39	BIBD4-3.....	A-45	BIBS2/0-5.....	A-44	BIBS44FX.....	A-39
BIBD2/0-4.....	A-45	BIBD43FX.....	A-39	BIBS2/05FX.....	A-39	BIBS4-5.....	A-44
BIBD2/04FX.....	A-39	BIBD4-4.....	A-45	BIBS2/0-6.....	A-44	BIBS45FX.....	A-39
BIBD2/04FXMT.....	A-40	BIBD44FX.....	A-39	BIBS2/06FX.....	A-39	BIBS4-6.....	A-44
BIBD2/04MT.....	A-46	BIBD4-5.....	A-45	BIBS2/06FXMT.....	A-40	BIBS46FX.....	A-39
BIBD2/0-5.....	A-45	BIBD45FX.....	A-39	BIBS2/06MT.....	A-46	BIBS4-8.....	A-44
BIBD2/05FX.....	A-39	BIBD4-6.....	A-45	BIBS2/0-8.....	A-44	BIBS48FX.....	A-39
BIBD2/0-6.....	A-45	BIBD46FX.....	A-39	BIBS2/08FX.....	A-39	BIBS5003DB.....	A-37
BIBD2/06FX.....	A-39	BIBD4-8.....	A-45	BIBS2/08FXMT.....	A-40	BIBS5004DB.....	A-37
BIBD2/06MT.....	A-46	BIBD48FX.....	A-39	BIBS2/08MT.....	A-46	BIBS5005DB.....	A-37
BIBD2/0-8.....	A-45	BIBD600-10.....	A-45	BIBS250-10.....	A-44	BIBS5006DB.....	A-37
BIBD2/08FX.....	A-39	BIBD60010FX.....	A-42	BIBS25010FX.....	A-40	BIBS600-10.....	A-44
BIBD2/08FXMT.....	A-40	BIBD60010FXMT.....	A-42	BIBS25010FXMT.....	A-40	BIBS60010FX.....	A-42
BIBD2/08MT.....	A-46	BIBD60010MT.....	A-46	BIBS25010MT.....	A-46	BIBS60010MT.....	A-46
BIBD250-10.....	A-45	BIBD600-12.....	A-45	BIBS250-12.....	A-44	BIBS600-12.....	A-44
BIBD25010FX.....	A-40	BIBD60012FX.....	A-42	BIBS25012FX.....	A-40	BIBS60012FX.....	A-42
BIBD25010FXMT.....	A-40	BIBD60012FXMT.....	A-42	BIBS25012FXMT.....	A-40	BIBS60012FXMT.....	A-42
BIBD25010MT.....	A-46	BIBD60012MT.....	A-46	BIBS25012MT.....	A-46	BIBS60012MT.....	A-46
BIBD250-12.....	A-45	BIBD600-14.....	A-45	BIBS250-14.....	A-44	BIBS600-14.....	A-44
BIBD25012FX.....	A-40	BIBD60014FX.....	A-42	BIBS25014FX.....	A-40	BIBS60014FX.....	A-42
BIBD25012FXMT.....	A-40	BIBD600-2.....	A-45	BIBS250-3.....	A-44	BIBS600-3.....	A-44
BIBD25012MT.....	A-46	BIBD6002FX.....	A-42	BIBS2503FX.....	A-40	BIBS6003FX.....	A-41
BIBD250-14.....	A-45	BIBD600-3.....	A-45	BIBS250-4.....	A-44	BIBS600-4.....	A-44
BIBD25014FX.....	A-40	BIBD6003FX.....	A-42	BIBS2504FX.....	A-40	BIBS6004FX.....	A-41
BIBD250-2.....	A-45	BIBD600-4.....	A-45	BIBS2504FXMT.....	A-40	BIBS6004FXMT.....	A-42
BIBD2502FX.....	A-40	BIBD6004FX.....	A-42	BIBS2504MT.....	A-46	BIBS6004MT.....	A-46
BIBD250-3.....	A-45	BIBD6004FXMT.....	A-42	BIBS250-5.....	A-44	BIBS600-5.....	A-44
BIBD2503FX.....	A-40	BIBD6004MT.....	A-46	BIBS2505FX.....	A-40	BIBS6005FX.....	A-41
BIBD250-4.....	A-45	BIBD600-5.....	A-45	BIBS250-6.....	A-44	BIBS600-6.....	A-44
BIBD2504FX.....	A-40	BIBD6005FX.....	A-42	BIBS2506FX.....	A-40	BIBS6006FX.....	A-41
BIBD2504FXMT.....	A-40	BIBD600-6.....	A-45	BIBS2506FXMT.....	A-40	BIBS6006FXMT.....	A-42
BIBD2504MT.....	A-46	BIBD6006FX.....	A-42	BIBS2506MT.....	A-46	BIBS6006MT.....	A-46
BIBD250-5.....	A-45	BIBD6006FXMT.....	A-42	BIBS250-8.....	A-44	BIBS600-8.....	A-44
BIBD2505FX.....	A-40	BIBD6006MT.....	A-46	BIBS2508FX.....	A-40	BIBS6008FX.....	A-42
BIBD250-6.....	A-45	BIBD600-8.....	A-45	BIBS2508FXMT.....	A-40	BIBS6008FXMT.....	A-42
BIBD2506FX.....	A-40	BIBD6008FX.....	A-42	BIBS2508MT.....	A-46	BIBS6008MT.....	A-46
BIBD2506MT.....	A-46	BIBD6008FXMT.....	A-42	BIBS350-10.....	A-44	BIBS750-10.....	A-44
BIBD250-8.....	A-45	BIBD6008MT.....	A-46	BIBS35010FX.....	A-41	BIBS75010FX1.....	A-42
BIBD2508FX.....	A-40	BIBD750-10.....	A-45	BIBS35010FXMT.....	A-41	BIBS750-12.....	A-44
BIBD2508FXMT.....	A-40	BIBD75010FX1.....	A-42	BIBS35010MT.....	A-46	BIBS75012FX1.....	A-42
BIBD2508MT.....	A-46	BIBD750-12.....	A-45	BIBS350-12.....	A-44	BIBS750-14.....	A-44
BIBD350-10.....	A-45	BIBD75012FX1.....	A-42	BIBS35012FX.....	A-41	BIBS75014FX1.....	A-42
BIBD35010FX.....	A-41	BIBD750-14.....	A-45	BIBS35012FXMT.....	A-41	BIBS750-3.....	A-44
BIBD35010FXMT.....	A-41	BIBD75014FX1.....	A-42	BIBS35012MT.....	A-46	BIBS7503FX1.....	A-42
BIBD35010MT.....	A-46	BIBD750-2.....	A-45	BIBS350-14.....	A-44	BIBS750-4.....	A-44
BIBD350-12.....	A-45	BIBD7502FX1.....	A-42	BIBS35014FX.....	A-41	BIBS7504FX1.....	A-42
BIBD35012FX.....	A-41	BIBD750-3.....	A-45	BIBS3502DB.....	A-37	BIBS750-6.....	A-44
BIBD35012FXMT.....	A-41	BIBD7503FX1.....	A-42	BIBS350-3.....	A-44	BIBS7506FX1.....	A-42
BIBD35012MT.....	A-46	BIBD750-4.....	A-45	BIBS3503DB.....	A-37	BIBS750-8.....	A-44
BIBD350-14.....	A-45	BIBD7504FX1.....	A-42	BIBS3503FX.....	A-41	BIBS7508FX1.....	A-42
BIBD350-2.....	A-45	BIBD750-6.....	A-45	BIBS350-4.....	A-44	BIC2-4-750.....	K-78
BIBD3502FX.....	A-41	BIBD7506FX1.....	A-42	BIBS3504DB.....	A-37	BIC2-6-750.....	K-78
BIBD350-3.....	A-45	BIBD750-8.....	A-45	BIBS3504FX.....	A-41	BIC2-8-750.....	K-78
BIBD3503FX.....	A-41	BIBD7508FX1.....	A-42	BIBS3504FXMT.....	A-41	BIC-4-350.....	K-78
BIBD350-4.....	A-45	BIBS2/0-10.....	A-44	BIBS3504MT.....	A-46	BIC-4-500.....	K-78
BIBD3504FX.....	A-41	BIBS2/010FX.....	A-39	BIBS350-5.....	A-44	BIC-6-350.....	K-78
BIBD3504FXMT.....	A-41	BIBS2/010FXMT.....	A-40	BIBS3505DB.....	A-37	BIC-6-500.....	K-78
BIBD3504MT.....	A-46	BIBS2/010MT.....	A-46	BIBS3505FX.....	A-41	BIC-8-350.....	K-78
BIBD350-5.....	A-45	BIBS2/0-12.....	A-44	BIBS350-6.....	A-44	BIC-8-500.....	K-78
BIBD3505FX.....	A-41	BIBS2/012FX.....	A-39	BIBS3506DB.....	A-37	BIPC1/0-2.....	A-12
BIBD350-6.....	A-45	BIBS2/012FXMT.....	A-40	BIBS3506FX.....	A-41	BIPC350-350.....	A-12
BIBD3506FX.....	A-41	BIBS2/012MT.....	A-46	BIBS3506FXMT.....	A-41	BIPC350-4/0.....	A-12
BIBD3506FXMT.....	A-41	BIBS2/0-14.....	A-44	BIBS3506MT.....	A-46	BIPC4/0-1/0.....	A-12
BIBD3506MT.....	A-46	BIBS2/014FX.....	A-39	BIBS350-8.....	A-44	BIPC4/0-6.....	A-12
BIBD350-8.....	A-45	BIBS2/0-3.....	A-44	BIBS3508FX.....	A-41	BIPC500-4/0.....	A-12

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
BISR1/0.....	A-43	BPCL1.....	A-60	BSSBC750-4-2.....	K-67	BYNA39RT15HACCC.....	I-47
BISR1/0FX.....	A-39	BPCL2.....	A-60	BSSBC750-5.....	K-68	BYNA39RT15HHT.....	I-18, I-19
BISR1-DB.....	A-36	BPCL3.....	A-60	BSSBC750-6.....	K-68	BYNA39RT15HT.....	I-23
BISR2.....	A-43	BPCL4.....	A-60	BSSBC750-6-2.....	K-67	BYNA39RTACCC.....	I-50
BISR250.....	A-43	BPD2-4-750.....	K-78	BSSBC750-7.....	K-68	BYNA39RTHT.....	I-23
BISR250-DB.....	A-36	BPD2-6-750.....	K-78	BSSBC750-8.....	K-68	BYNA43R15HHT.....	I-16, I-17
BISR250FX.....	A-40	BPD2-8-750.....	K-78	BSSI-20.....	K-74	BYNA43R15HT.....	I-22
BISR2FX.....	A-39	BPD-4-350.....	K-78	BSSI-500.....	K-74	BYNA43RHT.....	I-22
BISR3/0-DB.....	A-36	BPD-4-500.....	K-78	BSSI-500L.....	K-74	BYNA43RT15ACCC.....	I-50
BISR350.....	A-43	BPD-6-350.....	K-78	BTW150750.....	A-37, H-3, N-106	BYNA43RT15HACCC.....	I-47
BISR350FX.....	A-41	BPD-6-500.....	K-78	BTW1575F12.....	N-106	BYNA43RT15HHT.....	I-18, I-19
BISR4-DB.....	A-36	BPD-8-350.....	K-78	BTW30150.....	A-37, H-3, N-106	BYNA43RT15HT.....	I-23
BISR500.....	A-43	BPD-8-500.....	K-78	BTWTC500.....	K-74	BYNA43RTACCC.....	I-50
BISR500FX.....	A-41	BPTE14-750.....	A-59	BULF10HS.....	B-83	BYNA43RTHT.....	I-23
BIT2/0.....	A-43	BPTE20-1000.....	A-59	BULF10P.....	B-82	BYNA45R15HHT.....	I-16, I-17
BIT2/0FX.....	A-39	BPTE22-750.....	A-59	BULF14HS.....	B-83	BYNA45R15HT.....	I-22
BIT250.....	A-43	BPTE26-500.....	A-59	BULF14NG.....	B-83	BYNA45R15HHT.....	I-18, I-19
BIT250FX.....	A-40	BS-2006.....	E-96	BULF14P.....	B-82, B-92	BYNA45R15HT.....	I-23
BIT350.....	A-43	BS-2007.....	E-96	BULF18HS.....	B-83	BYNA45RT15ACCC.....	I-50
BIT350FX.....	A-41	BS-2008.....	E-96	BULF18NG.....	B-83	BYNA45RT15HHT.....	I-18, I-19
BIT4.....	A-43	BS-2009.....	E-96	BULF18P.....	B-82, B-92	BYNA45RT15HT.....	I-23
BIT4FX.....	A-39	BS-2010.....	E-96	BULM10P.....	B-80	BYNA49R15HHT.....	I-16, I-17
BIT600.....	A-43	BS-2011.....	E-96	BULM14HS.....	B-81	BYNA49R15HT.....	I-22
BIT600FX.....	A-41	BS-2012.....	E-96	BULM14N.....	B-80	BYNA49RT15ACCC.....	I-50
BIT750.....	A-43	BS-2013.....	E-96	BULM14NG.....	B-81	BYNA49RT15HHT.....	I-18, I-19
BIT750FX1.....	A-42	BS-2014.....	E-96	BULM14P.....	B-80, B-92	BYNA49RT15HT.....	I-23
BITO2/0.....	A-43	BS-2015.....	E-96	BULM18HS.....	B-81	BYNA49RTACCC.....	I-50
BITO2/0FX.....	A-39	BS-2016.....	E-96	BULM18N.....	B-80	BYNA49RTHT.....	I-23
BITO250.....	A-43	BS-2017.....	E-96	BULM18NG.....	B-81	BYNA52R15HHT.....	I-16, I-17
BITO250FX.....	A-40	BS-2018.....	E-96	BULM18P.....	B-80, B-92	BYNA52R15HT.....	I-22
BITO350.....	A-43	BS-2019.....	E-96	BWB680AAG.....	E-80	BYNA52RHT.....	I-22
BITO350FX.....	A-41	BS-2020.....	E-96	BWB680IG.....	E-80	BYNA52RT15ACCC.....	I-50
BITO4.....	A-43	BS-2021.....	E-96	BWTE14-1000.....	A-58	BYNA52RT15HACCC.....	I-48
BITO4FX.....	A-39	BS-2024.....	E-96	BWTE14-750.....	A-58	BYNA52RT15HHT.....	I-18, I-19
BITO600.....	A-43	BS-2025.....	E-96	BWTE21-500.....	A-58	BYNA52RT15HT.....	I-23
BITO600FX.....	A-41	BS-2026.....	E-96	BYNA245MM2T15HACCC.....	I-47	BYNA52RTACCC.....	I-50
BITO750.....	A-43	BS-2027.....	E-96	BYNA245MRT15ACCC.....	I-50	BYNA52RTHT.....	I-23
BITO750FX1.....	A-42	BS-2028.....	E-96	BYNA245MRTACCC.....	I-50	BYNA56R15HHT.....	I-16, I-17
BMC2-14.....	E-122	BS-2029.....	E-96	BYNA32R15HHT.....	I-16, I-17	BYNA56R15HT.....	I-22
BMC2-14BK.....	E-122	BS-2030.....	E-96	BYNA32R15HT.....	I-22	BYNA56RHT.....	I-22
BMC2-14CL.....	E-122	BS-2031.....	E-96	BYNA32RHT.....	I-22	BYNA56RT15HHT.....	I-18, I-19
BMC2-516.....	E-122	BS-2032.....	E-96	BYNA32RT15ACCC.....	I-50	BYNA56RT15HT.....	I-23
BMC2-516BK.....	E-122	BS-2033.....	E-96	BYNA32RT15HACCC.....	I-47	BYNA56RTHT.....	I-23
BMC2-516CL.....	E-122	BS-2034.....	E-96	BYNA32RT15HHT.....	I-18, I-19	BYNA58R15HHT.....	I-16, I-17
BMCSS6W17.....	E-121	BS-2068.....	E-96	BYNA32RT15HT.....	I-23	BYNA58R15HT.....	I-22
BMCSS8W17.....	E-121	BS-2069.....	E-96	BYNA32RTACCC.....	I-50	BYNA58RHT.....	I-22
BMVBCHMT.....	N-53	BS-2070.....	E-96	BYNA32RT15HACCC.....	I-47	BYNA58RT15HHT.....	I-18, I-19
BP10PADKIT.....	N-97	BS-2105.....	E-96	BYNA32RT15HHT.....	I-18, I-19	BYNA58RT15HT.....	I-23
BPC1000.....	F-15	BS-2106.....	E-96	BYNA32RT15HT.....	I-23	BYNA58RTHT.....	I-23
BPC1125.....	F-15	BS-2107.....	E-96	BYNA32RTACCC.....	I-50	BYNA59MRT15ACCC.....	I-50
BPC1187.....	F-15	BS-2108.....	E-96	BYNA32RTHT.....	I-23	BYNA59MRT15HACCC.....	I-48
BPC1250.....	F-15	BS-2109.....	E-96	BYNA34R15HHT.....	I-16, I-17	BYNA59MRTACCC.....	I-50
BPC1375.....	F-15	BS-2110.....	E-96	BYNA34R15HT.....	I-22	BYNA59R15HHT.....	I-16, I-17
BPC1500.....	F-15	BSC1000.....	F-14	BYNA34RHT.....	I-22	BYNA59R15HT.....	I-22
BPC1687.....	F-15	BSC1125.....	F-14	BYNA34RT15HHT.....	I-18, I-19	BYNA59RHT.....	I-22
BPC1875.....	F-15	BSC1375.....	F-14	BYNA34RT15HT.....	I-23	BYNA59RT15HHT.....	I-18, I-19
BPC2000.....	F-15	BSC1500.....	F-14	BYNA34RTHT.....	I-23	BYNA59RT15HT.....	I-23
BPC2375.....	F-15	BSC1875.....	F-14	BYNA36R15HHT.....	I-16, I-17	BYNA59RTHT.....	I-23
BPC2500.....	F-15	BSC2375.....	F-14	BYNA36R15HT.....	I-22	BYNA760MRT15ACCC.....	I-50
BPC312.....	F-15	BSC250025.....	F-14	BYNA36RHT.....	I-22	BYNA760MRT15HACCC.....	I-48
BPC3500.....	F-15	BSC687.....	F-14	BYNA36RT15ACCC.....	I-50	BYNA760MRTACCC.....	I-50
BPC375.....	F-15	BSD20100.....	E-72	BYNA36RT15HHT.....	I-18, I-19	BYNS32RHT.....	I-24
BPC437.....	F-15	BSD2050.....	E-72	BYNA36RT15HT.....	I-23	BYNS32RTHT.....	I-25
BPC500.....	F-15	BSD2050N.....	E-72	BYNA36RTACCC.....	I-50	BYNS34RHT.....	I-24
BPC562.....	F-15	BSD2050Y.....	E-72	BYNA36RTHT.....	I-23	BYNS34RTHT.....	I-25
BPC625.....	F-15	BSSBC750-2-1.....	K-67	BYNA39R15HHT.....	I-16, I-17	BYNS36RHT.....	I-24
BPC687.....	F-15	BSSBC750-3.....	K-68	BYNA39R15HT.....	I-22		
BPC750.....	F-15	BSSBC750-3-1.....	K-67	BYNA39RHT.....	I-22		
BPC843.....	F-15	BSSBC750-4.....	K-68	BYNA39RT15ACCC.....	I-50		
BPC875.....	F-15	BSSBC750-4-1.....	K-67				

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
BYNS36RHT	I-25	CCY10L18LT1090G	E-65	CM2929P	K-35	CT110500SSBC	G-17
BYNS39RHT	I-24	CCY10L18LT14GY	E-65	CM29L	K-35	CT110500SSBC0	G-17
BYNS39RHT	I-25	CCY10L18LT38G	E-65	CM3029P	K-35	CT110500SSBL	G-17
BYNS43RHT	I-24	CCY10L18T12G	E-65	CM3229P	K-35	CT110500SSBLO	G-17
BYNS43RHT	I-25	CCY10L24LT1090G	E-65	CM3429P	K-35	CT110600SSBC	G-17
BYNS451RHT	I-24	CCY10L24LT38G	E-65	CM3629P	K-35	CT110600SSBC0	G-17
BYNS451RHT	I-25	CCY10L24T12G	E-65	CMB-29P	K-35	CT110600SSBL	G-17
BYNS49RHT	I-24	CCY10L6LT38G	E-65	CMB-29R	K-35	CT110600SSBLO	G-17
BYNS49RHT	I-25	CCY10L7T14GY	E-65	CP2525	H-13	CT110800SSBC	G-17
BYNS52RHT	I-24	CCY10L9LT38G	E-65	CP2626	H-13	CT110800SSBC0	G-17
BYNS52RHT	I-25	CCY10L9T12G	E-65	CP26A26A	H-11	CT110800SSBL	G-17
BYNS56RHT	I-24	CCY10L9T14GY	E-65	CP27A27A	H-11	CT110800SSBLO	G-17
BYNS56RHT	I-25	CFAD-FR	C-194	CP2828	H-13	CT120200D	G-8
BYNS58RHT	I-24	CFAN-FR	C-194	CP28A28A	H-11	CT120200D0	G-8
BYNS58RHT	I-25	CFANL-FR	C-194	CP2929	H-13	CT120200L	G-8
BYNS59RHT	I-24	CFAO-FR	C-194	CP29A29A	H-11	CT120200L0	G-8
BYNS59RHT	I-25	CFAR-FR*	C-194	CP2C2C	H-13	CT120200LOUG	G-19
C-11B	E-50	CH10C	G-15	CP30A30A	H-11	CT120300D	G-8
C-11CSH-1	E-54	CH10C0	G-15	CP31A31A	H-11	CT120300D0	G-8
C-11CSH-2	E-54	CH10M	G-15	CP32A32A	H-11	CT120300L	G-8
C-11CSH-3	E-54	CH10M0	G-15	CP3434	H-13	CT120300L0	G-8
C11CSLH12	E-54	CH11C	G-15	CP34A34A	H-11	CT120300SSBC	G-17
C-11D	E-50	CH11M	G-15	CP37A37A	H-11	CT120300SSBC0	G-17
C11HD4/0DB	E-52	CH12C	G-15	CPB10	A-65	CT120300SSBL	G-17
C-11JA	E-52	CH12C0	G-15	CPB12	A-65	CT120300SSBLO	G-17
C-11JPT	E-50	CH12M	G-15	CPB14	A-65	CT120350SSBC	G-17
C11K16D	E-51	CH12M0	G-15	CPB16-5/8	A-65	CT120350SSBC0	G-17
C11K17D	E-51	CH14C	G-15	CPB21-1/4	A-65	CT120350SSBL	G-17
C-11LH-1	E-54	CH14C0	G-15	CPB6	A-65	CT120350SSBLO	G-17
C-11LH-2	E-54	CH14M	G-15	CPB8	A-65	CT120400C0UG	G-19
C-11LH-3	E-54	CH16C	G-15	CPT10	A-65	CT120400D	G-4, G-8
C-11N	E-50	CH16M	G-15	CPT12	A-65	CT120400D0	G-4, G-8
C-22	E-50	CH18C	G-15	CPT16	A-65	CT120400D00	G-4, G-8
C-22D	E-50	CH18M	G-15	CPT6	A-65	CT120400L	G-4, G-8
C22HD4/0DB	E-52	CH24C	G-15	CPT8	A-65	CT120400L0	G-4, G-8
C-22JA	E-52	CH24C0	G-15	CSB037800SR1	F-6	CT120400L00	G-4, G-8
C-22JPT	E-50	CH24L	G-15	CSB051900SR1	F-6	CT120400LOUG	G-19
C-22LH-1	E-54	CH2C	G-15	CSB0971200SR1	F-6	CT120400LUG	G-19
C-22LH-2	E-54	CH2C0	G-15	CSB097900SR1	F-6	CT120400M0	G-4
C-22LH-3	E-54	CH2M	G-15	CSB125900SR1	F-6	CT120400MH14D	G-12
C-4	E-50	CH3C	G-15	CSB163900SR1	F-6	CT120400MH14D0	G-12
C-4JA	E-52	CH3C0	G-15	CSJB097600SR1	F-6	CT120400MH14L	G-12
C-4JPT	E-50	CH3M	G-15	CSJB125800SR1	F-6	CT120400MH14L0	G-12
C-4LH-1	E-54	CH4C	G-15	CSJB163900SR1	F-6	CT120400SSBC	G-17
C-4LH-2	E-54	CH4C0	G-15	CSMD68LI	N-19	CT120400SSBC0	G-17
C-4LH-3	E-54	CH4M	G-15	CSMD6LI	N-19	CT120400SSBL	G-17
C-5	E-50	CH4M0	G-15	CT110200SSBB	G-17	CT120400SSBLO	G-17
C-6	E-53	CH5C	G-15	CT110200SSBB0	G-17	CT120500CUG	G-19
C-61	E-53	CH5C0	G-15	CT110200SSBC	G-17	CT120500SSBC	G-17
C-66	E-53	CH5M	G-15	CT110200SSBC0	G-17	CT120500SSBC0	G-17
C-6D	E-53	CH6C	G-15	CT110225SSBC	G-17	CT120500SSBL	G-17
C-7	E-53	CH6C0	G-15	CT110225SSBC0	G-17	CT120500SSBLO	G-17
C-8	E-50	CH6M	G-15	CT110225SSBL	G-17	CT120800L	G-8
CASEWDIES	N-73 - N-75	CH6M0	G-15	CT110225SSBLO	G-17	CT120800L00	G-8
CCD	H-27	CH7C	G-15	CT110300SSBC	G-17	CT120900LUG	G-19
CCFBG-FR	C-195	CH7C0	G-15	CT110300SSBC0	G-17	CT1751100Q	G-4, G-9
CCFD-FR	C-195	CH7M	G-15	CT110300SSBL	G-17	CT1751100Q0	G-4, G-9
CCFDX-FR	C-195	CH8C	G-15	CT110300SSBLO	G-17	CT1751100QUG	G-19
CCFN-FR	C-195	CH8C0	G-15	CT110325SSBB	G-17	CT1751100QUG	G-19
CCFO-FR	C-195	CH8M	G-15	CT110325SSBB0	G-17	CT1751400Q0	G-9
CCFR-FR	C-195	CH9C	G-15	CT110325SSBC	G-17	CT1751400QUG	G-19
CCN	H-27	CH9C0	G-15	CT110325SSBC0	G-17	CT1751500Q	G-9
CCNL	H-27	CH9M	G-15	CT110350SSBC	G-17	CT175400Q0UG	G-19
CCO	H-27	CL1/0-14TN	A-23, E-38	CT110350SSBC0	G-17	CT175500Q	G-9
CCY106LT12G	E-65	CL250-516TN	A-23, E-38	CT110350SSBL	G-17	CT175500Q0	G-9
CCY10L12LT1090G	E-65	CL3/0-516TN	A-23, E-38	CT110350SSBLO	G-17	CT175600Q	G-4, G-9
CCY10L12LT14GY	E-65	CL50-1	A-23, E-38	CT110400SSBC	G-17	CT175600Q0	G-4, G-9
CCY10L12LT38G	E-65	CL50-1TN	A-23, E-38	CT110400SSBC0	G-17	CT175600Q0UG	G-19
CCY10L12T12G	E-65	CL50-1TNBULK	E-38	CT110400SSBL	G-17	CT175600QUG	G-19
CCY10L14LT14GY	E-65	CM2829P	K-35	CT110400SSBLO	G-17	CT175800Q0	G-9

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
CT175900Q.....	G-9	CT30125MH8C.....	G-12	CT50175RC.....	G-11	CTB075SFIM.....	G-14
CT175900Q00.....	G-4, G-9	CT30125MH8M.....	G-12	CT50175RC0.....	G-11	CTB100AAF2C.....	G-14
CT175900Q0UG.....	G-19	CT30125MH8M0.....	G-12	CT50175SSBC.....	G-16	CTB100AAF2C0.....	G-14
CT18025M0UG.....	G-18	CT30125MUG.....	G-18	CT50175SSBC0.....	G-16	CTB100AAF2L.....	G-14
CT18025MUG.....	G-18	CT40137SSBC.....	G-16	CT50175SSBD.....	G-16	CTB100RAF2C.....	G-14
CT18075C.....	G-4, G-6	CT40137SSBC0.....	G-16	CT50175SSBD0.....	G-16	CTB100RAF2C0.....	G-14
CT18075C0.....	G-4, G-6	CT40137SSBM.....	G-16	CT50200SSBB.....	G-16	CTB100RAF2D.....	G-14
CT18075C00.....	G-4, G-6	CT40137SSBM0.....	G-16	CT50200SSBB0.....	G-16	CTB100RAF2L.....	G-14
CT18075C0UG.....	G-18	CT40200C.....	G-7	CT50200SSBC.....	G-16	CTB100SF2C.....	G-14
CT18075CUG.....	G-18	CT40200C0.....	G-7	CT50200SSBC0.....	G-16	CTB125RA4CUG.....	G-21
CT18075FLC.....	G-10	CT40200C00.....	G-7	CT50250IDC.....	G-10	CTB125RA4DUG.....	G-21
CT18075IDC.....	G-10	CT40200CUG.....	G-18	CT50250SSBB.....	G-16	CTB150AAF3C.....	G-14
CT18075M.....	G-4, G-6	CT40200M.....	G-7	CT50250SSBB0.....	G-16	CTB150AAF3D.....	G-14
CT18075M0.....	G-4, G-6	CT40200M0.....	G-7	CT50250SSBC.....	G-16	CTB150RA4C.....	G-14
CT18075M00.....	G-4, G-6	CT40200M00.....	G-7	CT50250SSBC0.....	G-16	CTB150RAF3C0.....	G-14
CT18075MH4C.....	G-12	CT40200MUG.....	G-18	CT50300C.....	G-4, G-8	CTB150RAF3D.....	G-14
CT18075MH4M.....	G-12	CT40200SSBC.....	G-16	CT50300C0.....	G-4, G-8	CTB150SF3C.....	G-14
CT18087SSBC.....	G-16	CT40200SSBC0.....	G-16	CT50300C00.....	G-4, G-8	CTHS120400M.....	G-13
CT18087SSBC0.....	G-16	CT40200SSBD.....	G-16	CT50300C0UG.....	G-18	CTHS18075M.....	G-13
CT18087SSBM.....	G-16	CT40200SSBD0.....	G-16	CT50300C2.....	G-4, G-8	CTHS40125M.....	G-13
CT18087SSBM0.....	G-16	CT40300C.....	G-7	CT50300CUG.....	G-18	CTHS50300M.....	G-13
CT18100SSBC.....	G-16	CT40300C0.....	G-7	CT50300M.....	G-4, G-8	CTHS50400M.....	G-13
CT18100SSBC0.....	G-16	CT40300C00.....	G-7	CT50300M0.....	G-4, G-8	CTHS50700M.....	G-13
CT18100SSBM.....	G-16	CT40300M.....	G-7	CT50300M00.....	G-4, G-8	CTSS100100FC304C.....	G-26
CT18100SSBM0.....	G-16	CT40300M0.....	G-7	CT50300M0UG.....	G-18	CTSS100100FC316C.....	G-29
CT18125C.....	G-6	CT40300M00.....	G-7	CT50300MH10C0UG.....	G-20	CTSS100200FC304C.....	G-26
CT18125C0.....	G-6	CT40300SSBC.....	G-16	CT50300MH10CUG.....	G-20	CTSS100200FC316C.....	G-29
CT18125C3.....	G-6	CT40300SSBC0.....	G-16	CT50300MUG.....	G-18	CTSS100300FC304C.....	G-26
CT18125C4.....	G-6	CT40300SSBD.....	G-16	CT50300SSBB.....	G-16	CTSS100300FC316C.....	G-29
CT18125M.....	G-6	CT40300SSBD0.....	G-16	CT50300SSBB0.....	G-16	CTSS100400FC304C.....	G-26
CT18125M0.....	G-6	CT40400C.....	G-7	CT50300SSBC.....	G-16	CTSS100400FC316C.....	G-29
CT18200C.....	G-6	CT40400C0.....	G-7	CT50300SSBC0.....	G-16	CTSS100500FC304C.....	G-26
CT18200C0.....	G-6	CT40400C00.....	G-7	CT50400C.....	G-4, G-8	CTSS100500FC316C.....	G-29
CT18200C0UG.....	G-18	CT40400C0UG.....	G-18	CT50400C0.....	G-4, G-8	CTSS100600FC304C.....	G-26
CT18200C1.....	G-6	CT40400M.....	G-7	CT50400C00.....	G-4, G-8	CTSS100600FC316C.....	G-29
CT18200C2.....	G-6	CT40400M0.....	G-7	CT50400C0UG.....	G-18	CTSS100800FC304C.....	G-26
CT18200C5.....	G-6	CT40400M00.....	G-7	CT50400C2.....	G-4, G-8	CTSS100800FC316C.....	G-29
CT18200C6.....	G-6	CT40400SSBC.....	G-16	CT50400C3.....	G-4, G-8	CTSS225100304C.....	G-24
CT18200IDC.....	G-10	CT40400SSBC0.....	G-16	CT50400CUG.....	G-18	CTSS225100316C.....	G-27
CT18200M.....	G-6	CT40400SSBD.....	G-16	CT50400M.....	G-4, G-8	CTSS225200304C.....	G-24
CT18200M0.....	G-6	CT40400SSBD0.....	G-16	CT50400M0.....	G-4, G-8	CTSS225200316C.....	G-27
CT18200M0UG.....	G-18	CT50137RC.....	G-11	CT50400M00.....	G-4, G-8	CTSS225300304C.....	G-24
CT18200MUG.....	G-18	CT50175C.....	G-4, G-7	CT50400M02.....	G-4, G-8	CTSS225300316C.....	G-27
CT18200SSBC.....	G-16	CT50175C0.....	G-4, G-7	CT50400MH10C.....	G-12	CTSS225400304C.....	G-24
CT18200SSBC0.....	G-16	CT50175C00.....	G-4, G-7	CT50400MH10C0.....	G-12	CTSS225400316C.....	G-27
CT18200SSBM.....	G-16	CT50175C0UG.....	G-18	CT50400MH10M0.....	G-12	CTSS225500304C.....	G-24
CT18200SSBM0.....	G-16	CT50175C1.....	G-4, G-7	CT50400MUG.....	G-18	CTSS225500316C.....	G-27
CT2501000Q.....	G-9	CT50175C2.....	G-4, G-7	CT50400RC.....	G-11	CTSS225600304C.....	G-24
CT2501000RQ.....	G-11	CT50175C3.....	G-4, G-7	CT50400RC0.....	G-11	CTSS225600316C.....	G-27
CT250200RQ.....	G-11	CT50175C4.....	G-4, G-7	CT50400SSBB.....	G-17	CTSS250200FC304L.....	G-26
CT250200RQ0.....	G-11	CT50175C5.....	G-4, G-7	CT50400SSBB0.....	G-17	CTSS250200FC316L.....	G-29
CT250500RQ.....	G-11	CT50175C6.....	G-4, G-7	CT50400SSBC.....	G-17	CTSS250200PC304L.....	G-25
CT250500RQ0.....	G-11	CT50175C7.....	G-4, G-7	CT50400SSBC0.....	G-17	CTSS250200PC316L.....	G-28
CT250600Q.....	G-9	CT50175C8.....	G-4, G-7	CT50425SSBB.....	G-17	CTSS250300FC304L.....	G-26
CT250600Q0.....	G-9	CT50175CUG.....	G-18	CT50425SSBB0.....	G-17	CTSS250300FC316L.....	G-29
CT250600RQ.....	G-11	CT50175IDC.....	G-10	CT50425SSBC.....	G-17	CTSS250300PC304L.....	G-25
CT250600RQ0.....	G-11	CT50175M.....	G-4, G-7	CT50425SSBC0.....	G-17	CTSS250300PC316L.....	G-28
CT250800Q.....	G-9	CT50175M0.....	G-4, G-7	CTASST.....	G-22	CTSS250400FC304L.....	G-26
CT250800Q0.....	G-9	CT50175M00.....	G-4, G-7	CTASST500B.....	G-22	CTSS250400FC316L.....	G-29
CT250800Q0UG.....	G-19	CT50175M02.....	G-4, G-7	CTASST500N.....	G-22	CTSS250400PC304L.....	G-25
CT250800RQ.....	G-11	CT50175M0UG.....	G-18	CTASST650B.....	G-22	CTSS250400PC316L.....	G-28
CT250800RQ0.....	G-11	CT50175MH10C.....	G-12	CTASST650N.....	G-22	CTSS250500FC304L.....	G-26
CT30125C.....	G-4, G-6	CT50175MH10C0.....	G-12	CTB075AAFIC.....	G-14	CTSS250500FC316L.....	G-29
CT30125C0.....	G-4, G-6	CT50175MH10C0UG.....	G-20	CTB075AAFIC0.....	G-14	CTSS250500PC304L.....	G-25
CT30125C00.....	G-4, G-6	CT50175MH10CUG.....	G-20	CTB075AAFIM.....	G-14	CTSS250500PC316L.....	G-28
CT30125C0UG.....	G-18	CT50175MH10M.....	G-12	CTB075RAF4CUG.....	G-21	CTSS250600FC304L.....	G-26
CT30125CUG.....	G-18	CT50175MH10M0.....	G-12	CTB075RAFIC.....	G-14	CTSS250600FC316L.....	G-29
CT30125M.....	G-4, G-6	CT50175MUG.....	G-18	CTB075RAFIC0.....	G-14	CTSS250600PC304L.....	G-25
CT30125M0.....	G-4, G-6	CT50175PMC.....	G-10	CTB075RAFIM.....	G-14	CTSS250600PC316L.....	G-28
CT30125M00.....	G-4, G-6	CT50175PMCO.....	G-10	CTB075SF1C.....	G-14	CTSS250700FC304L.....	G-26

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
CTSS250700FC316L	G-29	CTSS675600PC316Q	G-28	DV6L	N-38	FD69C8	L-20
CTSS250700PC304L	G-25	CTSS675700FC304Q	G-26	DV8L1	N-38	FD69D12	L-20
CTSS250700PC316L	G-28	CTSS675700FC316Q	G-29	E2C34G1	A-10, H-41,	FD69D8	L-20
CTSS250800FC304L	G-26	CTSS675700PC304Q	G-25		L-22	FD70D12	L-20
CTSS250800FC316L	G-29	CTSS675700PC316Q	G-28	E3C34G1	A-10, H-41,	FD70D16	L-20
CTSS250800PC304L	G-25	CTSS675800FC304Q	G-26		L-22	FFGC2	E-36
CTSS250800PC316L	G-28	CTSS675800FC316Q	G-29	E4C34G1	A-10, H-41,	FFGC2/0	E-36
CTSS450200FC304L	G-26	CTSS675800PC304Q	G-25		L-22	FFGC4	E-36
CTSS450200FC316L	G-29	CTSS675800PC316Q	G-28	EA25	A-15	FFGC6	E-36
CTSS450200PC304L	G-25	CTSS700200304L	G-24	EA28	A-15	FFGC8	E-36
CTSS450200PC316L	G-28	CTSS700200316L	G-27	EA28-2N	A-15	FL1025X03B	B-74
CTSS450300FC304L	G-26	CTSS700300304L	G-24	EA2C	A-15	FL1025X03D	B-74
CTSS450300FC316L	G-29	CTSS700300316L	G-27	EA34	A-15	FL1425X03B	B-74
CTSS450300PC304L	G-25	CTSS700400304L	G-24	EA34-2N	A-15	FL1425X03D	B-74
CTSS450300PC316L	G-28	CTSS700400316L	G-27	EP10	N-95	FL1825X03B	B-74
CTSS450400FC304L	G-26	CTSS700500304L	G-24	EP101HP	N-95	FL1825X03D	B-74
CTSS450400FC316L	G-29	CTSS700500316L	G-27	EP101HP2	N-95	FLN1025X03D	B-74
CTSS450400PC304L	G-25	CTSS700600304L	G-24	EP102	N-95	FLN1425X03D	B-74
CTSS450400PC316L	G-28	CTSS700600316L	G-27	EP6	N-95	FLN1825X03D	B-74
CTSS450500FC304L	G-26	CTSS700700304L	G-24	EPAC10	N-96	FORCEGAUGE1215	N-20, N-104
CTSS450500FC316L	G-29	CTSS700700316L	G-27	EPAC6	N-96	FP10	N-97
CTSS450500PC304L	G-25	CTSS700800304L	G-24	EPP10	N-94	FP6	N-97
CTSS450500PC316L	G-28	CTSS700800316L	G-27	EPP16	N-94	FQN10M25X03B	B-67
CTSS450600FC304L	G-26	CTSS900200304L	G-24	EPPCASE1	N-94	FQN10M25X03D	B-67
CTSS450600FC316L	G-29	CTSS900200316L	G-27	EQC632C	E-35, H-42	FQN14M18X02D	B-67
CTSS450600PC304L	G-25	CTSS900300304L	G-24	ES25A25A	H-46	FQN14M25X03B	B-67
CTSS450600PC316L	G-28	CTSS900300316L	G-27	ES25A2W	H-46	FQN14M25X03D	B-67
CTSS450700FC304L	G-26	CTSS900400304L	G-24	ES25A4W	H-46	FQN18M18X02D	B-67
CTSS450700FC316L	G-29	CTSS900400316L	G-27	ES25R25R	H-46	FQN18M25X03B	B-67
CTSS450700PC304L	G-25	CTSS900500304L	G-24	ES25R2R	H-46	FQN18M25X03D	B-67
CTSS450700PC316L	G-28	CTSS900500316L	G-27	ES25R2W	H-46	FQP10F25X03D	B-64
CTSS450800FC304L	G-26	CTSS900600304L	G-24	ES25R4W	H-46	FQP14F11X03D	B-64
CTSS450800FC316L	G-29	CTSS900600316L	G-27	ES25R6W	H-46	FQP14F18X02D	B-64
CTSS450800PC304L	G-25	CTSS900700304L	G-24	ES2R2R	H-46	FQP14F25X03D	B-64
CTSS450800PC316L	G-28	CTSS900700316L	G-27	ES2R2W	H-46	FQP18F11X03D	B-64
CTSS500200304L	G-24	CTSS900800304L	G-24	ES2R4W	H-46	FQP18F18X02D	B-64
CTSS500200316C	G-27	CTSS900800316L	G-27	ES2R6W	H-46	FQP18F25X03D	B-64
CTSS500300304L	G-24	CTT50	G-31	ES2R8W	H-46	FT3B4/0	A-61
CTSS500300316C	G-27	CTTSS900	G-31	ES2W2W	H-46	FT3B500	A-61
CTSS500400304L	G-24	CUSA442NTC	C-142	ES2W4W	H-46	FT4B4/0	A-61
CTSS500400316L	G-27	CUSA442TC38	C-142	ES2W6W	H-46	FT4B500	A-61
CTSS500500304L	G-24	CUT200BLMVBL	N-77, N-86	ES2W8W	H-46	GA25H26	E-46
CTSS500500316L	G-27	CUT200BLSTA	N-77, N-86	ES4W4W	H-46	GA400H294CTN	E-46
CTSS500600304L	G-24	CUW26RE-1	H-73	ES4W6W	H-46	GAR1126	E-40
CTSS500600316L	G-27	CUW30A-E	H-73	ES4W8W	H-46	GAR1129	E-40
CTSS500700304L	G-24	CUW32R-E	H-73	ES6W6W	H-46	GAR114C	E-40
CTSS500700316L	G-27	CUW34-E	H-72	ES6W8W	H-46	GAR1426	E-40
CTSS500750304L	G-24	CUW361R-E	H-73	ES8W8W	H-46	GAR1429	E-40
CTSS500750316L	G-27	CUW391A-E	H-73	F22A28	K-77	GAR1434	E-40
CTSS500800304L	G-24	CUW44-E	H-72	FCB63-2NP300	A-11, L-22	GAR144C	E-40
CTSS500800316L	G-27	CZ-11	E-51	FCB63-4N	A-11, L-22	GAR1526	E-40
CTSS675200FC304Q	G-26	DEV1L	N-38	FCB63-6N	A-11, L-22	GAR1529	E-40
CTSS675200FC316Q	G-29	DEV25L	N-38	FCB64-44NP50	A-11, L-22	GAR1534	E-40
CTSS675200PC304Q	G-25	DEV26L	N-38	FCB64-4N	A-11, L-22	GAR154C	E-40
CTSS675200PC316Q	G-28	DEV2L	N-38	FCB64-6N	A-11, L-22	GAR1626	E-40
CTSS675300FC304Q	G-26	DEV4L	N-38	FCB65-4N	A-11, L-22	GAR1629	E-40
CTSS675300FC316Q	G-29	DEV6L	N-38	FD64C5T16	L-20	GAR1634	E-40
CTSS675300PC304Q	G-25	DEV8L	N-38	FD655C6	L-20	GAR164C	E-40
CTSS675300PC316Q	G-28	DUW28	H-72	FD655D6	L-20	GAR1726	E-41
CTSS675400FC304Q	G-26	DUW28A	H-73	FD65C6T14	L-20	GAR1729	E-41
CTSS675400FC316Q	G-29	DUW31	H-72	FD66C6	L-20	GAR1734	E-41
CTSS675400PC304Q	G-25	DUW34	H-72	FD66D6	L-20	GAR174C	E-41
CTSS675400PC316Q	G-28	DUW44	H-72	FD675C8	L-20	GAR1826	E-41
CTSS675500FC304Q	G-26	DUW44A	H-73	FD675D8	L-20	GAR1829	E-41
CTSS675500FC316Q	G-29	DUW44A-E	H-73	FD685C8	L-20	GAR1834	E-41
CTSS675500PC304Q	G-25	DV1L	N-38	FD685D12	L-20	GAR184C	E-41
CTSS675500PC316Q	G-28	DV25L	N-38	FD685D8	L-20	GAR1926	E-41
CTSS675600FC304Q	G-26	DV26L	N-38	FD68C8	L-20	GAR1929	E-41
CTSS675600FC316Q	G-29	DV2L	N-38	FD68D12	L-20	GAR1934	E-41
CTSS675600PC304Q	G-25	DV4L	N-38	FD68D8	L-20	GAR194C	E-41



**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
GAR2026	E-41	GCM34	E-67	GK1826	E-47	GX3429	E-57
GAR2029	E-41	GCM4C	E-67	GK1829	E-47	GX3434	E-57
GAR2034	E-41	GD1526	E-44	GK1926	E-47	GX344C	E-57
GAR204C	E-41	GD1529	E-44	GK1929	E-47	GX4C4C	E-57
GAR2126	E-41	GD1626	E-44	GK6426	E-47	GXP1828RF	E-75
GAR2129	E-41	GD1629	E-44	GK6429	E-47	GZ26-12	E-68
GAR2134	E-41	GD1726	E-44	GK6434	E-47	GZ26-38	E-68
GAR214C	E-41	GD1729	E-44	GK644C	E-47	GZ26-58	E-68
GAR2226	E-41	GD1734	E-44	GKA25	E-37	GZ29-12	E-68
GAR2229	E-41	GD174C	E-44	GKA25SB	E-37	GZ29-38	E-68
GAR2234	E-41	GD1826	E-44	GKA28	E-37	GZ29-58	E-68
GAR224C	E-41	GD1829	E-44	GKA28SB	E-37	GZ4C-12	E-68
GAR2426	E-41	GD1834	E-44	GKA4C	E-37	GZ4C-38	E-68
GAR2429	E-41	GD184C	E-44	GKA8C	E-37	GZ4C-58	E-68
GAR2434	E-41	GD1926	E-44	GL2626	E-68	HBR40	N-114
GAR244C	E-41	GD1929	E-44	GL2929	E-68	HBR66	N-114
GAR3902	E-42	GD1934	E-44	GL3434	E-68	HFB22P1	A-21, L-24
GAR3902-BU	E-42	GD194C	E-44	GL4C4C	E-68	HFB33-4N	A-22, L-24
GAR3902TC	E-43	GD2026	E-44	GP10	N-98	HFB33P1	A-21, L-24
GAR3903	E-42	GD2029	E-44	GP1126	E-45	HFB42P1	A-21, L-24
GAR3903-BU	E-42	GD2034	E-44	GP1129	E-45	HFB44-4N	A-22, L-24
GAR3903TC	E-43	GD204C	E-44	GP114C	E-45	HFB44G30W	L-23
GAR3904	E-42	GD2126	E-44	GP1426	E-45	HFB44G31W	L-23
GAR3904-BU	E-42	GD2129	E-44	GP1429	E-45	HFB44G32W	L-23
GAR3904TC	E-43	GD2134	E-44	GP1434	E-45	HFB44P1	A-21, L-24
GAR3905	E-42	GD214C	E-44	GP144C	E-45	HFB52P1	L-24
GAR3905-BU	E-42	GD2226	E-44	GP1526G1	E-77	HFB53P1	L-24
GAR3905TC	E-43	GD2229	E-44	GP1629	E-45	HFB54P1	L-24
GAR3906	E-42	GD2234	E-44	GP164C	E-45	HFB55P1	L-24
GAR3906-BU	E-42	GD224C	E-44	GP1726	E-45	HFB62P1	L-24
GAR3906TC	E-43	GG15-1	E-58	GP1726G1	E-77	HFB63P1	A-21, L-24
GAR3907	E-42	GG16-1	E-58	GP1726RT	E-77	HFB64P1	L-24
GAR3907-BU	E-42	GG17-1	E-58	GP1826	E-45	HFB66-6N	A-22, L-24
GAR3907TC	E-43	GG17-15	E-58	GP184C	E-45	HFB66P1	A-21
GAR3908	E-42	GG18-1	E-58	GP2026	E-45	HFB88P1	A-21
GAR3908-BU	E-42	GG18-15	E-58	GP2226	E-45	HHSO/CB13	N-117
GAR3908TC	E-43	GG18-2	E-58	GP6426	E-45	HHSO/CB16	N-117
GAR3909	E-42	GG19-2	E-58	GP6429	E-45	HHSO/CB20	N-117
GAR3909-BU	E-42	GG19-25	E-58	GP6434	E-45	HIW12S0CSET	N-120
GAR3909TC	E-43	GG20-2	E-58	GP644C	E-45	HIW71612TGKIT	N-120
GAR6426	E-40	GG20-25	E-58	GP64526G1	E-77	HIW716ENFKIT1	N-111
GAR6429	E-40	GG20-3	E-58	GP64528G1	E-77	HIW716ENFKIT2	N-111
GAR6434	E-40	GG21-2	E-58	GP654CG1	E-77	HIW716ENFKIT3	N-111
GAR644C	E-40	GG21-25	E-58	GQ26-1	E-57	HIW716ENFTG	N-111
GAR644C-RB	E-42	GG21-3	E-58	GQ2626	E-57	HIW716ENFTGKIT	N-111
GAR8629	E-41	GG21-35	E-58	GQ29-1	E-57	HIW716ENFTGKIT1	N-111
GAR8634	E-41	GG22-2	E-58	GQ2929	E-57	HIW716MAGKIT1	N-112
GB26	E-67	GG22-25	E-58	GRC12	E-56	HIW716MAGKIT2	N-112
GB29	E-67	GG22-3	E-58	GRC34	E-56	HIW716MAGKIT3	N-112
GB34	E-67	GG22-4	E-58	GRC58	E-56	HIW716MAGKIT4	N-112
GB4C	E-67	GG24-2	E-58	GRF4C-3	E-76	HIW716MAGKIT5	N-112
GBL30N	E-67	GIE2CG3	E-70	GRF4C-4	E-76	HOSE2	N-115
GBM26	E-67	GIE4CG3	E-70	GRIDMAX®	E-110	HOSE325	N-115
GBM29	E-67	GIE4CG3P5	E-70	GRL3	E-56	HOSE350	N-115
GBM34	E-67	GIE4CG3P7	E-70	GRL4	E-56	HP10	N-97
GBM4C	E-67	GIE4CG4	E-70	GRL5	E-56	HP2CAMLOCKHOSESET	N-115
GC15A	E-55	GIE4CG4P5	E-70	GRL6	E-56	HP2HV	N-115
GC18A	E-55	GIE4CG4P7	E-70	GROUNDMAX™	E-108	HP6	N-97
GC22A	E-55	GK1126	E-47	GROUNDTAB1/2	E-23	HPP18	N-119
GC2525CT	E-69	GK1129	E-47	GROUNDTAB3/8	E-23	HPP182	N-119
GC2626	E-67	GK114C	E-47	GSTUD14HY	E-29	HPP5	N-119
GC2626CT	E-69	GK1426	E-47	GSTUD34HY	E-29	HPS1371LW	N-118
GC2929	E-67	GK1429	E-47	GSTUD38HY	E-29	HPS1383LW	N-118
GC2929CT	E-69	GK1434	E-47	GSTUD916HY	E-29	HPT59R1	N-116
GC3434	E-67	GK1526	E-47	GX2626	E-57	HPT60R1	N-116
GC4C4C	E-67	GK1529	E-47	GX264C	E-57	HPT71R1	N-116
GCB63T13G1	E-71	GK1626	E-47	GX2926	E-57	HPT72R1	N-116
GCL30	E-67	GK1629	E-47	GX2929	E-57	HPT83R1	N-116
GCM26	E-67	GK1726	E-47	GX294C	E-57	HPT84R1	N-116
GCM29	E-67	GK1729	E-47	GX3426	E-57	HPT96R1	N-116

## ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
HS_100FR.....	F-12	HSC200FR.....	F-11	K14P6C5P1/OCAG1.....	A-55	K8P4CG1.....	A-56
HS_100FR100.....	F-12	HSC200FR100.....	F-11	K15P4CAG1.....	A-55	K9P4CAG1.....	A-55
HS_100T300PF.....	F-9	HSC34FR.....	F-11	K16P6C5P1/OCAG1.....	A-55	KA25.....	A-15
HS_100T48PF.....	F-8	HSC34FR250.....	F-11	K174P4CG1.....	A-56	KA25-2TC38.....	A-15
HS_112FR.....	F-12	HSC38FR.....	F-11	K21A36U-2.....	A-30	KA25U.....	A-26
HS_112FR100.....	F-12	HSC38FR250.....	F-11	K22A36U-2.....	A-30	KA25UAR.....	A-27
HS_116T300PF.....	F-9	HSIC10-500FR.....	F-13	K22A39U-2.....	A-30	KA26U.....	A-26
HS_116T48PF.....	F-8	HSIC200FR.....	F-13	K2A25U.....	A-28	KA26UAR.....	A-27
HS_12FR.....	F-12	HSIC30-1000FR.....	F-13	K2A26U.....	A-28	KA28.....	A-15
HS_12FR250.....	F-12	HSIC350FR.....	F-13	K2A29U.....	A-28	KA29U.....	A-26
HS_12T300PF.....	F-9	HSIC4-40FR.....	F-13	K2A31U.....	A-28	KA2U.....	A-26
HS_12T48PF.....	F-8	HSIC8-1FR.....	F-13	K2A31U-2N.....	A-28	KA30226U.....	A-26
HS_14FR.....	F-12	HSKIT.....	B-93	K2A36U.....	A-28	KA30U.....	A-26
HS_14FR250.....	F-12	HSM100T6PF7.....	F-7	K2A36U-2N.....	A-28	KA30UAR.....	A-27
HS_14T300PF.....	F-9	HSM116T6PF26.....	F-7	K2A40U.....	A-28	KA31U.....	A-26
HS_14T48PF.....	F-8	HSM12T6PF10.....	F-7	K2A40U-2N.....	A-28	KA31UAR.....	A-27
HS_150T48PF.....	F-8	HSM14T6PF14.....	F-7	K2A44U.....	A-28	KA34.....	A-15
HS_18FR.....	F-12	HSM18T6PF20.....	F-7	K2A44U-2N.....	A-28	KA34U.....	A-26
HS_18FR250.....	F-12	HSM316T6PF18.....	F-7	K2C15.....	E-32	KA36229U.....	A-26
HS_18T300PF.....	F-9	HSM332T6PF24.....	F-7	K2C15B1.....	E-32	KA36U.....	A-26
HS_18T48PF.....	F-8	HSM34T6PF8.....	F-7	K2C17.....	E-32	KA36U-2N.....	A-26
HS_200FR.....	F-12	HSM38T6PF12.....	F-7	K2C17B1.....	E-32	KA36UAR.....	A-27
HS_200FR100.....	F-12	HTP3.....	N-115	K2C20.....	E-32	KA39230U.....	A-26
HS_200T48PF.....	F-8	HYA_28.....	K-63	K2C20B1.....	E-32	KA40U.....	A-26
HS_316T300PF.....	F-9	HYA_29.....	K-63	K2C22.....	E-32	KA40U-2N.....	A-26
HS_316T48PF.....	F-8	HYA_31.....	K-63	K2C22B1.....	E-32	KA44U.....	A-26
HS_332T300PF.....	F-9	HYA_34.....	K-63	K2C23.....	E-32	KA44U-2N.....	A-26
HS_332T48PF.....	F-8	HYA_39.....	K-63	K2C23B1.....	E-32	KA4C.....	A-15
HS_34FR.....	F-12	HYAO_28.....	K-63	K2C25.....	E-32	KA4UAR.....	A-27
HS_34FR250.....	F-12	HYAO_29.....	K-63	K2C25B1.....	E-32	KA6U.....	A-26
HS_34T300PF.....	F-9	HYAO_31.....	K-63	K2C26.....	E-32	KA8C.....	A-15
HS_34T48PF.....	F-8	HYAO_34.....	K-63	K2C26B1.....	E-32	KAG1MTGBRKT.....	A-55
HS_38FR.....	F-12	HYAO_39.....	K-63	K2C28.....	E-32	KAU-KIT1.....	A-32
HS_38FR250.....	F-12	HYFLUIDGAL.....	N-103	K2C28B1.....	E-32	KAU-KIT2.....	A-32
HS_38T300PF.....	F-9	HYFLUIDQDT.....	N-103	K2C28G3.....	E-32	KAU-KIT3.....	A-32
HS_38T48PF.....	F-8	HYM_28.....	K-63	K2C31.....	E-32	KAU-KIT4.....	A-32
HSB100T6PF7.....	F-7	HYM_29.....	K-63	K2C31B1.....	E-32	KC15.....	E-32
HSB110H48PF5.....	F-10	HYM_31.....	K-63	K2C34.....	E-32	KC15B1.....	E-32
HSB110H6PF5.....	F-10	HYM_34.....	K-63	K2C34B1.....	E-32	KC17.....	E-32
HSB110H9PF5.....	F-10	HYM_39.....	K-63	K2P4CAG1.....	A-55	KC17B1.....	E-32
HSB116T6PF26.....	F-7	HYS_28.....	K-63	K33B34-4N.....	K-76	KC20.....	E-32
HSB12T6PF10.....	F-7	HYS_29.....	K-63	K3A25U-2.....	A-29	KC20B1.....	E-32
HSB14T6PF14.....	F-7	HYS_31.....	K-63	K3A25U-4.....	A-29	KC22.....	E-32
HSB150H12PF3.....	F-10	HYS_34.....	K-63	K3A26U-2N.....	A-29	KC22B1.....	E-32
HSB150H48PF5.....	F-10	HYS_39.....	K-63	K3A27U-2N.....	A-29	KC22J12T13.....	E-35, H-42
HSB150H9PF3.....	F-10	IMPLOOTOLKIT.....	I-61	K3A27U-4N.....	A-29	KC23.....	E-32
HSB18T6PF20.....	F-7	J1022NC1.....	N-44, N-62	K3A29U-2N.....	A-29	KC23B1.....	E-32
HSB200H12PF2.....	F-10	J1022NC2.....	N-44, N-62	K3A29U-4N.....	A-29	KC25.....	E-32
HSB200H48PF2.....	F-10	J1022NC3.....	N-44, N-62	K3A2U-2.....	A-29	KC25B1.....	E-32
HSB200H9PF2.....	F-10	J1022NC4.....	N-44, N-62	K3A2U-4.....	A-29	KC26.....	E-32, E-35,
HSB316T6PF18.....	F-7	J1022NC5.....	N-44, N-62	K3A31U-2N.....	A-29		H-42
HSB332T6PF24.....	F-7	J1207.....	K-69	K3A31U-4N.....	A-29	KC26B1.....	E-32
HSB34H48PF5.....	F-10	J1592.....	K-69	K3A36U-2N.....	A-29	KC28.....	E-32
HSB34H6PF10.....	F-10	J278.....	E-73	K3A36U-4N.....	A-29	KC28B1.....	E-32
HSB34H9PF10.....	F-10	J279.....	E-73	K3A40U-4N.....	A-29	KC31.....	E-32
HSB34T6PF8.....	F-7	J280.....	E-73	K3P4CAG1.....	A-55	KC31B1.....	E-32
HSB35H3PF25.....	F-10	J295.....	E-73	K4A29U-4N.....	A-30	KC34.....	E-32
HSB35H48PF5.....	F-10	J4CNC.....	N-62	K4A31U-4N.....	A-30	KC34B1.....	E-32
HSB35H6PF25.....	F-10	J6CNC.....	N-62	K5P6C2P1/OCAG1.....	A-55	KC34J12T13.....	E-35, H-42
HSB38T6PF12.....	F-7	J6NCP1CH.....	N-62	K6A34U-6N.....	K-77	KCKF23.....	E-34
HSC100FR.....	F-11	J8CNC.....	N-62	K6A34U-8.....	A-31	KCKF25.....	E-34
HSC100FR100.....	F-11	K10P4CG1.....	A-56	K6B2826-2N.....	K-76	KCKF28.....	E-34
HSC112FR.....	F-11	K11A30U.....	A-30	K6B28-4N.....	K-76	KK3A36U-2N.....	A-29
HSC112FR100.....	F-11	K11A34U-2.....	A-30	K6P28.....	K-75	KK3A36U-4N.....	A-29
HSC12FR.....	F-11	K11A36U-2.....	A-30	K6P28C.....	K-75	KK3A40U-2N.....	A-29
HSC12FR250.....	F-11	K11A39U-2.....	A-30	K6P34U.....	K-77	KK3A40U-4N.....	A-29
HSC14FR.....	F-11	K12P4CG1.....	A-56	K6P34UC.....	K-77	KK3A44U-2N.....	A-29
HSC14FR250.....	F-11	K12P6C3P1/OCAG1.....	A-55	K6P4CG1.....	A-56	KK3A44U-4N.....	A-29
HSC18FR.....	F-11	K13P4CAG1.....	A-55	K6PC34U.....	K-77	KK4A36U-4N.....	A-30
HSC18FR250.....	F-11	K14P4CG1.....	A-56	K8A34U-10.....	A-31	KK4A40U-4N.....	A-30

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
KK6A31U-8	A-31	KSA270	A-5	LF1014	K-54 - K-56	LYBASEH	K-57
KK6A34U-8	A-31	KSA350	A-5	LF1025	K-54 - K-56	LYM1CC	K-55
KK6A44U-12	A-31	KSA4	A-5	LF2019	K-54 - K-56	LYM25C	K-55
KK8A31U-10	A-31	KSA470	A-5	LF2027	K-54 - K-56	LYM26C	K-55
KK8A34U-10	A-31	KSA500	A-5	LF2038	K-54 - K-56	LYM27C	K-55
KK8A39U-12	A-31	KSA6	A-5	LF2065	K-54 - K-56	LYM28C	K-55
KK8A44U-14	A-31	KSU17	A-4, H-5	LF2108	K-56	LYM29C	K-55
KKK31U-2N	A-26	KSU20	A-4, H-5	LH283	L-18	LYM2CC	K-55
KLU125	A-14	KSU22	A-4, H-5	LH343	L-18	LYM30C	K-55
KLU125TP	A-14	KSU23	A-4, H-5	LH453	L-18	LYM31C	K-55
KLU175	A-14	KSU25	A-4, H-5	LHR293	L-18	LYM32C	K-55
KLU175TP	A-14	KSU26	A-4, H-5	LHR443	L-18	LYM34C	K-55
KLU225	A-14	KSU27	A-4, H-5	LHR445	L-18	LYM34P3	K-59
KLU225TP	A-14	KSU29	A-4, H-5	LPC12S	N-120	LYS1CC	K-54
KLU25	A-14	KSU31	A-4, H-5	LPC38S	N-120	LYS1CP5	K-58
KLU25TP	A-14	KSU34	A-4, H-5	LPHT3CHISEL11418	N-120	LYS25C	K-54
KLU300	A-14	KVS26	A-6, H-6	LPHTADPMM71612	N-112, N-120	LYS25P5	K-58
KLU300TP	A-14	KVS26A	A-7, H-8	LPHTADPMMOP66	N-111, N-112, N-120	LYS26C	K-54
KLU35	A-14	KVS28	A-6, H-6			LYS26P5	K-58
KLU35TP	A-14	KVS28A	A-7, H-8	LPHTADPSMFOP66	N-112, N-113	LYS27C	K-54
KLU400	A-14	KVS31	A-6, H-6	LPHTASPALTCUT118	N-120	LYS27P5	K-58
KLU400TP	A-14	KVS31A	A-7, H-8	LPHTBIT111618D	N-110	LYS28C	K-54
KLU70	A-14	KVS34	A-6, H-6	LPHTBIT111624D	N-110	LYS28P5	K-58
KLU70TP	A-14	KVS34A	A-7, H-8	LPHTBIT131618D	N-110	LYS29C	K-54
KPA25	A-13	KVS40	A-6, H-6	LPHTBIT131624D	N-110	LYS29P5	K-58
KPA28	A-13	KVS40A	A-7, H-8	LPHTBIT151618D	N-110	LYS2CC	K-54
KPA34	A-13	KVS44	A-6, H-6	LPHTBIT151624D	N-110	LYS2CP5	K-58
KPA4C	A-13	KVS44A	A-7, H-8	LPHTBIT3418D	N-110	LYS30C	K-54
KPA4CUP	A-13	KVSU26	A-6, H-7	LPHTBIT5818D	N-110	LYS30P5	K-58
KPA8C	A-13	KVSU28	A-6, H-7	LPHTBIT91618D	N-110	LYS31C	K-54
KPA8CUP	A-13	KVSU31	A-6, H-7	LPHTCLAYSPADE118	N-120	LYS31P5	K-58
KPB4CG1	E-37	KVSU34	A-6, H-7	LPHTDRIPBODY66	N-120	LYS32C	K-54
K-PC28	K-75	KVSU40	A-6, H-7	LPHTDRIPBODY88	N-120	LYS32P5	K-58
KPU29A26AC	A-24	KVSU44	A-6, H-7	LPHTDRIPNOSE66	N-120	LYS32P6	K-59
KPU29A29AC	A-24	KVSW26	A-6, H-6	LPHTDRIPNOSE88	N-120	LYS34C	K-54
KPU34A26AC	A-24	KVSW28	A-6, H-6	LPHTGRDVR11458	N-120	LYS34P2	K-57
KPU34A34AC	A-24	KVSW31	A-6, H-6	LPHTHOSNCR666610	N-111 - N-113, N-120	LYS34P5	K-58
KPU39A26AC	A-24	KVSW34	A-7, H-6			LYS48P6	K-59
KPU39A39AC	A-24	KVSW40	A-7, H-6	LPHTHOSNCR666610OP	N-113, N-120	LYS4CC	K-54
KS15	A-3, E-35, H-4	KVSW44	A-7, H-6	LPHTHOSNCR66668	N-111 - N-113, N-120	LYS4CP5	K-58
		KWADP	N-56	LPHTHOSNCR66668OP	N-113	LYS64P6	K-59
KS17	A-3, E-35, H-4	LB13A	L-34	LPHTHOSNCR66668OP	N-120	LYS6CP5	K-58
		LB14A	L-34	LPHTHTMABODY66	N-111 - N-113	LYS80P6	K-59
KS17-3	A-3, E-35, H-4	LB15A	L-34	LPHTHTMADUSTCAPF	N-120	M20	H-71
		LB16A	L-34	LPHTHTMADUSTCAPM	N-120	M30	H-71
KS20	A-3, E-35, H-4	LB17A	L-34	LPHTHTMANOSE66	N-111 - N-113	M40	H-71
		LB18A	L-34	LPHTMOILPT118	N-120	M50	H-71
KS20-3	A-3, H-4	LB19A	L-34	LPHTNARCHISEL11814	N-120	M60	H-71
KS22	A-3, E-35, H-4	LB20A	L-34	LPHTSOC121	N-120	M70	H-71
		LB21A	L-34	LPHTSOC121116	N-120	M80	H-71
KS22-3	A-3, H-4	LB22A	L-34	LPHTSOC12112	N-120	M8ND	N-51
KS23	A-3, E-35, H-4	LB23A	L-34	LPHTSOC12114	N-120	M90	H-71
		LB24A	L-34	LPHTSOC12118	N-120	MAGHOLSTER	N-112
KS25	A-3, E-35, H-4	LB53A	L-34	LPHTSOC1212	N-120	MCC1000	N-89
		LB54A	L-34	LPHTSOC121316	N-120	MCC1000BLADESET	N-89
KS26	A-3, E-35, H-4	LB55A	L-34	LPHTSOC12138	N-120	MCC600	N-89
		LB56A	L-34	LPHTSOC121716	N-120	MCC600BLADESET	N-89
KS27	A-3, E-35, H-4	LB57A	L-34	LPHTSOC1234	N-120	MD6	N-56
		LB58A	L-34	LPHTSOC1258	N-120	MD612	N-56
KS29	A-3, E-35, H-4	LB59A	L-34	LPHTSOC1278	N-120	MD614	N-56
		LB83A	L-34	LPHTSOC12916	N-120	MD637	N-56
KS31	A-3, E-35, H-4	LB86A	L-34	LPHY750CXT	N-113	MD638	N-56
		LB88A	L-34	LPHY750K	N-113	MD64	N-56
KS34	A-3, E-35, H-4	LB90A	L-34	LPHY750XT	N-113	MD66	N-56
		LB91A	L-34	LPWHPKITD	N-116	MD68	N-56
KS39	A-3, H-4	LB92A	L-34	LSC10	H-20	MD6CP1	N-102
KS44	A-3, H-4	LB94A	L-34	LSC10-1	H-20	MD6K	N-56
KS90	A-3, H-4	LB96A	L-34	LSC556	H-20	MD7	N-57
KSA1/0	A-5	LF1006	K-54, K-56	LSC556-1	H-20	MD734	N-58
KSA2	A-5	LF1010	K-54, K-56			MD734KIT1	N-58

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
MD734R.....	N-58	NA214N.....	L-5	NDR6328T13.....	L-19	NNTR42A32A.....	L-26
MD734RC.....	N-58	NA224N.....	L-5	NDR6334T13.....	L-19	NNTR42A36A.....	L-26
MD734RKIT1.....	N-58	NA22A-4N.....	L-28	NDR6428T16.....	L-19	NNTR42A42A.....	L-26
MD76.....	N-57	NAH29-2N.....	L-6	NDR6434T12.....	L-19	NNTR45A45A.....	L-26
MD78.....	N-57	NAH29-34N.....	L-6	NDR6434T16.....	L-19	NNTR46A42A.....	L-26
MK9.....	G-31	NAH34-2N.....	L-6	NDR6444T16.....	L-19	NNTR46A46A.....	L-26
MMY293CF.....	N-53	NAH34-34N.....	L-6	NDR64534T14.....	L-19	NNTR48A48A.....	L-26
MR15.....	N-46	NAH40-2N.....	L-6	NDR6528T14.....	L-19	NS1212.....	L-15
MR15DIESETD1.....	N-46	NAH40-34N.....	L-6	NDR6534T12.....	L-19	NS1313.....	L-15
MR18.....	N-46	NAH404-4N.....	L-6	NDR6534T14.....	L-19	NS14148HC.....	L-15
MR18DIESETD1.....	N-46	NAH44-2N.....	L-6	NDR6544T14.....	L-19	NS1414HC.....	L-15
MR20.....	N-46	NAH44-34N.....	L-6	NDR65528T12.....	L-19	NS14A14A.....	L-28
MR20DIESETD1.....	N-46	NAH44-44N.....	L-6	NDR65534T12.....	L-19	NS1515.....	L-15
MR4C.....	N-47	NAH46-2N.....	L-6	NDR65544T12.....	L-19	NS1515HC.....	L-15
MR81A.....	N-43	NAH46-34N.....	L-6	NDR6748T12.....	L-19	NS1515HC HQ.....	L-15
MR833S1.....	N-43	NAH46-44N.....	L-6	NDR67544T12.....	L-19	NS15A15A.....	L-28
MR833T1.....	N-43	NAH48-2N.....	L-6	NDR67548T12.....	L-19	NS1616HC.....	L-15
MR89Q.....	N-43	NAH48-34N.....	L-6	NDR6844T12.....	L-19	NS16A16A.....	L-28
MR8G96.....	N-43	NAH48-44N.....	L-6	NDR6848T12.....	L-19	NS1717.....	L-15
MR8G98.....	N-43	NAH48-62N.....	L-6	NDR68544T12.....	L-19	NS1717HC.....	L-15
MRC840.....	N-52	NAH486-34N.....	L-6	NHNT1429.....	L-13	NS1717HC HQ.....	L-15
MRC840AL.....	N-52	NAR25A2N.....	L-30	NHNT1434.....	L-13	NS17A17A.....	L-28
MRE1022B.....	N-45	NAR29A2N.....	L-30	NHNT1529.....	L-13	NS1818.....	L-15
MRE1022NV.....	N-45	NAR29A4N.....	L-30	NHNT1534.....	L-13	NS1818CG2.....	L-15
MY28.....	N-53	NAR32A2N.....	L-30	NHNT1540.....	L-13	NS1818HC.....	L-15
MY284.....	N-53	NAR32A4N.....	L-30	NHNT1629.....	L-13	NS18A18A.....	L-28
MY286.....	N-53	NAR36A2N.....	L-30	NHNT1634.....	L-13	NS1919.....	L-15
MY2911.....	N-53	NAR36A4N.....	L-30	NHNT1640.....	L-13	NS1919HC.....	L-15
MY2911C.....	N-53	NAR42A2N.....	L-30	NHNT1644.....	L-13	NS1919HC HQ.....	L-15
MY293.....	N-53	NAR42A4N.....	L-30	NHNT1729.....	L-13	NS19A19A.....	L-28
MY293C.....	N-53	NAR45A2N.....	L-30	NHNT1734.....	L-13	NS2020.....	L-15
MY29UNIVERSALKIT.....	N-53	NAR45A4N.....	L-30	NHNT1740.....	L-13	NS2020HC.....	L-15
N2AH29-2N.....	L-7	NAR46A2N.....	L-30	NHNT1744.....	L-13	NS20A20A.....	L-28
N2AH29-34N.....	L-7	NAR46A4N.....	L-30	NHNT1829.....	L-13	NS2121.....	L-15
N2AH34-2N.....	L-7	NAR48A2N.....	L-30	NHNT1834.....	L-13	NS2121HC.....	L-15
N2AH34-34N.....	L-7	NAR48A4N.....	L-30	NHNT1840.....	L-13	NS21A21A.....	L-28
N2AH34-44N.....	L-7	NAS29-2N.....	L-4	NHNT1844.....	L-13	NS2222.....	L-15
N2AH40-34N.....	L-7	NAS29-34N.....	L-4	NHNT1846.....	L-13	NS2222HC.....	L-15
N2AH44-34N.....	L-7	NAS29-N.....	L-4	NHNT1929.....	L-13	NS22A22A.....	L-28
N2AH44-44N.....	L-7	NAS34-2N.....	L-4	NHNT1934.....	L-13	NS23A23A.....	L-28
N2AH44-44NHQ.....	L-7	NAS34-34N.....	L-4	NHNT1940.....	L-13	NS24A24A.....	L-28
N2AH46-44N.....	L-7	NAS34-N.....	L-4	NHNT1944.....	L-13	NS86A86A.....	L-28
N2AH48-44N.....	L-7	NAS40-2N.....	L-4	NHNT1946.....	L-13	NSNT1329.....	L-12
NA122N.....	L-5	NAS40-34N.....	L-4	NHNT2040.....	L-13	NSNT1429.....	L-12
NA132N.....	L-5	NAS40-44N.....	L-4	NHNT2044.....	L-13	NSNT1434.....	L-12
NA142N.....	L-5	NBC14A2N.....	L-31	NHNT2229.....	L-13	NSNT1529.....	L-12
NA144N.....	L-5	NBC15A-2N.....	L-31	NNT15A15A.....	L-25	NSNT1629.....	L-12
NA152N.....	L-5	NBC15A34N.....	L-31	NNT16A16A.....	L-25	NSNT2929.....	L-12
NA154N.....	L-5	NBC16A2N.....	L-31	NNT17A17A.....	L-25	NSNT3429.....	L-12
NA15A-2N.....	L-28	NBC16A34N.....	L-31	NNT18A18A.....	L-25	NSNT3434.....	L-12
NA15A-4N.....	L-28	NBC16A44N.....	L-31	NNT19A19A.....	L-25	NT1313.....	L-11
NA162N.....	L-5	NBC17A2N.....	L-31	NNT20A20A.....	L-25	NT1413.....	L-11
NA164N.....	L-5	NBC17A34N.....	L-31	NNT21A20A.....	L-25	NT1414.....	L-11
NA16A-2N.....	L-28	NBC17A44N.....	L-31	NNT22A22A.....	L-25	NT1514.....	L-11
NA172N.....	L-5	NBC18A2N.....	L-31	NNTR14A29A.....	L-27	NT1515.....	L-11
NA1744NHQ.....	L-5	NBC18A34N.....	L-31	NNTR15A36A.....	L-27	NT1614.....	L-11
NA174N.....	L-5	NBC18A-44N.....	L-31	NNTR15A42A.....	L-27	NT1615.....	L-11
NA17A-2N.....	L-28	NBC19A34N.....	L-31	NNTR16A29A.....	L-27	NT1616.....	L-11
NA17A-4N.....	L-28	NBC19A44N.....	L-31	NNTR16A32A.....	L-27	NT1714.....	L-11
NA182N.....	L-5	NBC20A2N.....	L-31	NNTR16A42A.....	L-27	NT1715.....	L-11
NA184N.....	L-5	NBC20A34N.....	L-31	NNTR17A29A.....	L-27	NT1717.....	L-11
NA18A-2N.....	L-28	NBC20A-44N.....	L-31	NNTR18A29A.....	L-27	NT1816.....	L-11
NA18A-4N.....	L-28	NBC21A44N.....	L-31	NNTR19A42A.....	L-27	NT1817.....	L-11
NA1944N.....	L-5	NBC22A2N.....	L-31	NNTR20A32A.....	L-27	NT1818.....	L-11
NA1944NHQ.....	L-5	NBC22A34N.....	L-31	NNTR22A46A.....	L-27	NT1919.....	L-11
NA194N.....	L-5	NBC22A44N.....	L-31	NNTR29A29A.....	L-26	NT2020.....	L-11
NA194N90CG2.....	L-5	NBC24A2N.....	L-31	NNTR32A25A.....	L-26	NT2121.....	L-11
NA19A-4N.....	L-28	NBC24A34N.....	L-31	NNTR32A32A.....	L-26	NT2222.....	L-11
NA204N.....	L-5	NBC24A44N.....	L-31	NNTR36A29A.....	L-26	NYFT3434CCP.....	K-53
NA20A-4N.....	L-28	NBC86A44N.....	L-31	NNTR36A36A.....	L-26	NYFT3434CCR.....	K-53

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
NYT2825.....	K-61	PAT750KLI.....	N-10	PENE-55GAL.....	F-4	PT292792.....	N-104
NYT2826.....	K-61	PAT750L5.....	N-10	PENE-5GAL.....	F-4	PT29291.....	N-20, N-31,
NYT2828.....	C-213, K-61	PAT750LI.....	N-10	PENE-8.....	F-4		N-71, N-72,
NYT282C.....	K-61	PAT81KFL5.....	N-12	PENE8BLB.....	F-4		N-103
NYT2925.....	C-213, K-61	PAT81KFTLI.....	N-12	PENE-GAL.....	F-4	PT29360.....	N-21, N-103
NYT2926.....	K-61	PATCHGRLLI.....	N-8 - N-19,	PENE-QT.....	F-4	PT294021.....	N-31, N-103
NYT2928.....	K-61		N-76 - N-82	PENHT1LB.....	F-4	PT2972.....	N-21, N-32,
NYT2929.....	C-213, K-61	PATCHGRLLDC.....	N-8 - N-19,	PENHT-4.....	F-4		N-33, N-103
NYT292C.....	K-61		N-76 - N-82	PENHT-8.....	F-4	PT2990010.....	N-59, N-60,
NYT3125.....	K-61	PATCUT129L5.....	N-78	PENHT8BLB.....	F-4		N-99
NYT3126.....	K-61	PATCUT129LI.....	N-78	PENHTGAL.....	F-4	PT2990015.....	N-99
NYT3128.....	K-61	PATCUT2156L5.....	N-77	PG1025X03D.....	B-71	PT2990025.....	N-99
NYT3129.....	K-61	PATCUT2156LI.....	N-77	PG1211.....	N-47	PT2990110.....	N-99
NYT3131.....	K-61	PATCUT245L5.....	N-79	PG1251.....	N-47	PT2990115.....	N-99
NYT3426.....	C-213, K-61	PATCUT245LI.....	N-79	PG1331.....	N-47	PT2990125.....	N-99
NYT3428.....	C-213, K-61	PATCUT4CUALLI.....	N-76	PG1425X03D.....	B-71	PT2990210.....	N-99
NYT3429.....	C-213, K-61	PATCUT4L5.....	N-76	PG1825X03D.....	B-71	PT2990215.....	N-99
NYT3431.....	K-61	PATJAWSCUT.....	N-15, N-16,	PG3951.....	N-42	PT2990225.....	N-99
NYT3434.....	C-213, K-61		N-81, N-82	PG3961.....	N-42	PT30250.....	N-38
NYT3926.....	K-61	PATJAWSMD6.....	N-15, N-16,	PG3971.....	N-42	PT4583.....	N-54, N-55
NYT3928.....	K-61		N-81, N-82	PG3981.....	N-42	PT4925.....	N-58, N-102
NYT3929.....	C-213, K-61	PATJAWSMD66.....	N-15, N-16,	PG4031R.....	N-45	PT49311.....	N-102
NYT3931.....	K-61		N-81, N-82	PG4032R.....	N-45	PT49521.....	N-58, N-102
NYT3934.....	C-213, K-61	PATJAWSMD68.....	N-15, N-16,	PG4061.....	N-45	PT50024605.....	N-61
NYT3939.....	K-61		N-81, N-82	PG4071.....	N-45	PT50024683.....	N-61
NYT4426.....	K-61	PATJAWSMD6K.....	N-16, N-81	PG4081.....	N-45	PT50024685.....	N-61
NYT4428.....	K-61	PATMD6682ALLIF.....	N-82	PG4091.....	N-49	PT50025151.....	N-18
NYT4429.....	C-213, K-61	PATMD6682ALLIFWCJ.....	N-82	PG4092.....	N-49	PT6515.....	N-30
NYT4431.....	C-213, K-61	PATMD66JC.....	N-15 - N-18,	PG4093.....	N-49	PT6545.....	N-30, N-103
NYT4434.....	C-213, K-61		N-81	PG4094.....	N-49	PT6733.....	N-102
NYT4439.....	K-61	PATMD66LI.....	N-16	PG4095.....	N-49	PT6744.....	N-102
NYT4444.....	C-213, K-61	PATMD66LICUTKIT1.....	N-18	PG4096.....	N-49	PT76.....	N-100
NYT4628.....	K-61	PATMD66LIWCJ.....	N-17	PGHS1425X03D.....	B-71	PT8504.....	N-54
NYT4629.....	K-61	PATMD682ALLIF.....	N-82	PGHS1825X03D.....	B-71	PT91.....	N-100
NYT4631.....	K-61	PATMD682ALLIFWCJ.....	N-82	PGN1025X03B.....	B-73	PT93.....	N-101
NYT4634.....	K-61	PATMD6882ALLIF.....	N-82	PGN1025X03D.....	B-73	PT94.....	N-101
NYT4639.....	K-61	PATMD6882ALLIFWCJ.....	N-82	PGN1425X03B.....	B-73	PT9711.....	N-94
NYT4644.....	K-61	PATMD68LI.....	N-16	PGN1425X03D.....	B-73	PTV10.....	B-84
NYT4646.....	C-213, K-61	PATMD68LICUTKIT1.....	N-18	PGN1825X03B.....	B-73	PTV14.....	B-84
OEM840NCP.....	N-61	PATMD68LIWCJ.....	N-17	PGN1825X03D.....	B-73	PTV18.....	B-84
OH25.....	N-54	PATMD6JC.....	N-15 - N-18,	PGP1025X03B.....	B-72	PU998.....	N-71
OUR840.....	N-55		N-81	PGP1025X03D.....	B-72	PUADP1.....	N-8, N-9,
OUR840WC.....	N-55	PATMD6KJC.....	N-15 - N-18,	PGP1425X03B.....	B-72		N-28, N-29
P15K.....	N-8, N-9,		N-81	PGP1425X03D.....	B-72	Q10F11X02D.....	B-61
	N-28, N-29	PATMD6KLI.....	N-16	PGP1825X03B.....	B-72	Q10F18X02D.....	B-61
P8A.....	F-4	PATMD6KLICUTKIT1.....	N-18	PGP1825X03D.....	B-72	Q10F25X03B.....	B-61
PAT46CLWLSL5.....	N-8	PATMD6KLIWCJ.....	N-17	PT10024162.....	N-20, N-84	Q10F25X03D.....	B-61
PAT46CLWLSLI.....	N-8	PATMD6LI.....	N-16	PT10037384.....	N-78, N-84,	Q10M25X03D.....	B-60
PAT46LWL5.....	N-9	PATMD6LICUTKIT1.....	N-18		N-87	Q14F11X02B.....	B-61
PAT46LWLI.....	N-9	PATMD6LIWCJ.....	N-17	PT10037388.....	N-78, N-84,	Q14F11X02D.....	B-61
PAT46LWLSL5.....	N-8	PATMDCUT82ALLIF.....	N-82		N-87	Q14F18X02B.....	B-61
PAT46LWLSLI.....	N-8	PATMDCUTACSRKIT.....	N-81	PT10038657.....	N-79, N-88	Q14F18X02D.....	B-61
PAT4PC834L5.....	N-13	PATMDCUTLI.....	N-81	PT10040663.....	N-79, N-88	Q14F25X03B.....	B-61
PAT4PC834LI.....	N-13	PENA1/2.....	F-4	PT10043890.....	N-87	Q14F25X03D.....	B-61
PAT500SJ66L5.....	N-15	PENA13-4.....	F-4	PT10050733.....	N-24, N-25	Q14M18X02B.....	B-60
PAT500SJ66LI.....	N-15	PENA13-55GAL.....	F-4	PT10054094.....	N-28, N-29,	Q14M18X02D.....	B-60
PAT500SJ68L5.....	N-15	PENA13-5GAL.....	F-4		N-31, N-35,	Q14M25X03B.....	B-60
PAT500SJ68LI.....	N-15	PENA13-8.....	F-4		N-36, N-86,	Q14M25X03D.....	B-60
PAT500SJ68LICUTKIT1.....	N-15, N-80	PENA138BLB.....	F-4		N-88	Q18F11X02D.....	B-61
PAT500SJ6L5.....	N-15	PENA13CARTRIDGE.....	F-4	PT10074020.....	N-15 - N-19,	Q18F18X02B.....	B-61
PAT500SJ6LI.....	N-15	PENA13-GAL.....	F-4		N-80, N-81	Q18F18X02D.....	B-61
PAT500SJ6LICUTKIT1.....	N-15, N-80	PENA13-QT.....	F-4	PT10128.....	N-103	Q18F25X03B.....	B-61
PAT500SJCUTL5.....	N-80	PENA-4.....	F-4	PT11018.....	N-101	Q18F25X03D.....	B-61
PAT500SJCUTLI.....	N-80	PENA-55GAL.....	F-4	PT20719001.....	N-34	Q18M11X02D.....	B-60
PAT600L5.....	N-14	PENA-5GAL.....	F-4	PT208620.....	N-8 - N-14,	Q18M18X02B.....	B-60
PAT600LI.....	N-14	PENA8BLB.....	F-4		N-76 - N-79	Q18M18X02D.....	B-60
PAT644L5.....	N-11	PENACARTRIDGE.....	F-4	PT212851.....	N-26	Q18M25X03B.....	B-60
PAT644LI.....	N-11	PENA-GAL.....	F-4	PT290741.....	N-101	Q18M25X03D.....	B-60
PAT750CL5.....	N-10	PENA-QT.....	F-4	PT29091.....	N-101	Q2A1C-2.....	A-17
PAT750CLI.....	N-10	PENE-4.....	F-4	PT292141.....	N-101	Q2A26-2N.....	A-17

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
Q2A28-2N.....	A-17		L-21	QP14M18X02B.....	B-62	RGC39G1.....	E-73
Q2A28-4N.....	A-17	QGFL26B2T6.....	A-11, E-74,	QP14M18X02D.....	B-62, B-92	RGC44G1.....	E-73
Q2A31-2N.....	A-17		L-21	QP14M25X03B.....	B-62	RHCC129ACSR.....	N-87
Q2A31-4N.....	A-17	QGFL29B1.....	A-11, E-74,	QP14M25X03D.....	B-62, B-92	RHCC2156ACSR.....	N-86
Q2A34-2N.....	A-17		L-21	QP18F11X02D.....	B-63	RHCC2156ACSRF.....	N-86
Q2A34-4N.....	A-17	QGFL29B1T6.....	A-11, E-74,	QP18F18X02B.....	B-63	RHCC245CUAL.....	N-88
Q2A40-2N.....	A-17		L-21	QP18F18X02D.....	B-63, B-92	RHCC4CUAL.....	N-85
Q2A40-4N.....	A-17	QGFL31B1.....	A-11, E-74,	QP18F25X03B.....	B-63	RHCC4CUALBLD.....	N-85
Q2A44-4N.....	A-17		L-21	QP18F25X03D.....	B-63, B-92	RHCC4CUALGDEBLD.....	N-85
Q2A46-4N.....	A-17	QGFL31B1T6.....	A-11, E-74,	QP18M11X02D.....	B-62	RHCCHSA.....	N-87, N-88
Q2B28-2N.....	A-18		L-21	QP18M18X02B.....	B-62	RK141-2.....	B-94
Q2B31-2N.....	A-18	QGFL34B1.....	A-11, E-74,	QP18M18X02D.....	B-62, B-92	RK141ABOX100.....	B-94
Q2B40-4N.....	A-18		L-21	QP18M25X03B.....	B-62	RK142-2.....	B-94
Q3A28-2N.....	A-17	QGFL34B1T6.....	A-11, E-74,	QP18M25X03D.....	B-62, B-92	RK142ABOX100.....	B-94
Q3A28-4N.....	A-17		L-21	QPX2828.....	A-8, H-14	RK149-2.....	A-57
Q3A31-2N.....	A-17	QGFL39B1.....	A-11, E-74,	QPX2828-Y.....	A-9	RK150-2.....	A-57
Q3A31-4N.....	A-17		L-21	QPX282C.....	A-8, H-14	RK151-2.....	A-57
Q3A34-2N.....	A-17	QGFL39B1T6.....	A-11, E-74,	QPX282C-Y.....	A-9	RK152-2.....	A-57
Q3A34-4N.....	A-17		L-21	QPX2C2C.....	A-8, H-14	RK153-2.....	A-57
Q3A40-4N.....	A-17	QGFL44B1.....	A-11, E-74,	QPX2C2C-Y.....	A-9	RK1942.....	F-16, N-105
Q3A44-4N.....	A-17		L-21	QPX3428.....	A-8, H-14	RK225-2.....	A-57
Q3A46-4N.....	A-17	QGFL44B1T6.....	A-11, E-74,	QPX3428-Y.....	A-9	RK226-2.....	A-57
QA1C-2B.....	A-16		L-21	QPX342C.....	A-8, H-14	RK227-2.....	A-57
QA1C-B.....	A-16	QGFL46B1.....	A-11, E-74,	QPX342C-Y.....	A-9	RP50RP02.....	N-83
QA26-2B.....	A-16		L-21	QPX3434.....	A-8, H-14	RP50RP03.....	N-83
QA26-B.....	A-16	QGFL46B1T6.....	A-11, E-74,	QPX3434-Y.....	A-9	RPC701302.....	N-90
QA28-2B.....	A-16		L-21	QPX4428.....	A-8, H-14	RPC701402.....	N-90
QA28-2N.....	A-16	QGFL48B1.....	A-11, E-74,	QPX442C.....	A-8, H-14	RPC705501.....	N-91
QA28-B.....	A-16		L-21	QPX4434.....	A-8, H-14	RPC705601.....	N-91
QA31-2B.....	A-16	QIKLITE.....	E-83	QPX4444.....	A-8, H-14	RPC902101.....	N-91
QA31-2N.....	A-16	QIKLITEKIT.....	E-83	QPX4444-Y.....	A-9	RPC902201.....	N-91
QA31-B.....	A-16	QIKSTIK.....	E-83	QQA1C.....	A-16	RWRC516.....	N-92
QA34-2B.....	A-16	QN10F18X02B.....	B-66	QQA1C-2.....	A-16	RWRC916.....	N-92
QA34-2N.....	A-16	QN10F18X02D.....	B-66	QQA26.....	A-16	RYA25UC.....	K-66
QA34-4B.....	A-16	QN10F25X03B.....	B-66	QQA26-2.....	A-16	RYA25UCR.....	K-66
QA34-B.....	A-16	QN10F25X03D.....	B-66	QQA28.....	A-16	RYA26UC.....	K-66
QA40-2N.....	A-16	QN10M25X03D.....	B-65	QQA28-2N.....	A-16	RYA26UCR.....	K-66
QA40-B.....	A-16	QN14F11X02B.....	B-66	QQA31.....	A-16	RYA27UC.....	K-66
QA44-2N.....	A-16	QN14F11X02D.....	B-66	QQA31-2N.....	A-16	RYA27UCR.....	K-66
QA44-4N.....	A-16	QN14F18X02B.....	B-66	QQA34.....	A-16	RYA28UC.....	K-66
QA44-B.....	A-16	QN14F18X02D.....	B-66	QQA34-2N.....	A-16	RYA28UCR.....	K-66
QA46-2N.....	A-16	QN14F25X03B.....	B-66	QQA40-2N.....	A-16	RYA29UC.....	K-66
QA46-B.....	A-16	QN14F25X03D.....	B-66	QQA40-4N.....	A-16	RYA29UCR.....	K-66
QA4C-2B.....	A-16	QN14M18X02B.....	B-65	QQA44-2N.....	A-16	RYA2UC.....	K-66
QA4C-B.....	A-16	QN14M18X02D.....	B-65	QQA44-4N.....	A-16	RYA2UCR.....	K-66
QA8C-2B.....	A-16	QN14M25X03B.....	B-65	QQA4C.....	A-16	RYA2WAC.....	K-66
QA8C-B.....	A-16	QN14M25X03D.....	B-65	QQA4C-2.....	A-16	RYA2WACR.....	K-66
QB1C.....	A-18	QN18F11X02B.....	B-66	QQA8C.....	A-16	RYA31.....	K-66
QB26.....	A-18	QN18F11X02D.....	B-66	QQA8C-2.....	A-16	RYA31AC.....	K-66
QB28.....	A-18	QN18F18X02B.....	B-66	QR1C.....	A-19	RYA31ACR.....	K-66
QB31-2N.....	A-18	QN18F18X02D.....	B-66	QR26.....	A-19	RYA31C-2.....	K-65
QB4C.....	A-18	QN18F25X03B.....	B-66	QR28.....	A-19	RYA31CR-2.....	K-65
QB8C.....	A-18	QN18F25X03D.....	B-66	QR31.....	A-19	RYA34C-2.....	K-65
QDA1C.....	A-19	QN18M18X02B.....	B-65	QR34.....	A-19	RYA34CR-2.....	K-65
QDA26.....	A-19	QN18M18X02D.....	B-65	QR40.....	A-19	RYA4UC.....	K-66
QDA28.....	A-19	QN18M25X03B.....	B-65	QR4C.....	A-19	RYA4UCR.....	K-66
QDA31.....	A-19	QN18M25X03D.....	B-65	RA6UCR-SL.....	K-65	RYA75AC.....	K-66
QDA34.....	A-19	QP10F18X02B.....	B-63	RA6UC-SL.....	K-65	RYA75ACR.....	K-66
QDA40.....	A-19	QP10F18X02D.....	B-63	RCC1000.....	N-90	RYAC25.....	K-66, K-69
QDA4C.....	A-19	QP10F25X03B.....	B-63	RCC336.....	N-91	RYAC31.....	K-69
QDA8C.....	A-19	QP10F25X03D.....	B-63	RCC556.....	N-91	RYAC31-1.....	K-69
QGFL1CB1.....	A-11, E-74,	QP10F38X05D.....	B-63	RCC600E.....	N-90	S2GBP41A.....	I-63, M-32
	L-21	QP10M25X03D.....	B-62	RCC750HD.....	N-90	S2GBP41A12.....	I-63, M-32
QGFL1CB1T6.....	A-11, E-74,	QP14F11X02D.....	B-63	RCC954ACSR1K.....	N-91	S2GBP41A12B2.....	I-65, M-34
	L-21	QP14F18X02B.....	B-63	RDM4-28.....	K-65	S2GBP41AB2.....	I-65, M-34
QGFL26B1.....	A-11, E-74,	QP14F18X02D.....	B-63, B-92	RDM6-28.....	K-65	S2GBP445A.....	I-63, M-32
	L-21	QP14F25X03.....	B-92	RDM8-28.....	K-65	S2GBP445A12.....	I-63, M-32
QGFL26B1T6.....	A-11, E-74,	QP14F25X03B.....	B-63	RDMD-28CR.....	K-64	S2GBP445A12B2.....	I-65, M-34
	L-21	QP14F25X03D.....	B-63, B-92	RDMD4-2858D.....	K-64	S2GBP445AB2.....	I-65, M-34
QGFL26B2.....	A-11, E-74,	QP14M11X02D.....	B-62	RDMD4-28G3.....	K-64	S2GBP44A.....	I-63, M-32

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
S2GBP44A12.....	I-63, M-32	S2GBP448AB2.....	I-66, M-35	SH2GBP48A5B2.....	I-66, M-35	SWAB19A-34N.....	M-18
S2GBP44A12B2.....	I-65, M-34	S3D451R25MX1.....	I-68	SN10.....	B-48	SWAB22A2N.....	M-18
S2GBP44AB2.....	I-65, M-34	S3D451RMX1.....	I-68	SN10B.....	B-49	SWAB22A-34N.....	M-18
S2GBP451ASG1HT.....	I-69	S3D48R25MX1.....	I-68	SN14.....	B-48	SWAB22A-44N.....	M-18
S2GBP451ASG4.....	I-69	S3D48RMX1.....	I-68	SN14B.....	B-49	SWAB86A2N.....	M-18
S2GBP45A.....	I-63, M-32	S3D55R25MX1.....	I-68	SN18.....	B-48	SWAB86A34N.....	M-18
S2GBP45A12.....	I-63, M-32	S3D55RMX1.....	I-68	SN18B.....	B-49	SWAB86A-44N.....	M-18
S2GBP45A12B2.....	I-65, M-34	S3D56RMX1.....	I-68	SP10.....	B-47, B-92	SWAC18A-2N.....	M-12
S2GBP45AB2.....	I-65, M-34	S3D59R25MX1.....	I-68	SP14.....	B-47, B-92	SWAC18A-34N.....	M-12
S2GBP463ASG1HT.....	I-69	S3GBP41A.....	I-67, M-36	SP16.....	B-47	SWAC18A-44N.....	M-12
S2GBP463ASG6.....	I-69	S3GBP445A.....	I-67, M-36	SP18.....	B-92	SWAC19A-2N.....	M-12
S2GBP46A.....	I-64, M-33	S3GBP44A.....	I-67, M-36	SPEC-BLOK.....	A-63	SWAC19A-34N.....	M-12
S2GBP46A12.....	I-64, M-33	S3GBP45A.....	I-67, M-36	SPEC-BLOK Questionnaire ...	A-66	SWAC19A-44N.....	M-12
S2GBP46A12B2.....	I-66, M-35	S3GBP46A.....	I-67, M-36	STKIT08.....	B-92	SWAC20A-2N.....	M-12
S2GBP46AB2.....	I-66, M-35	S3GBP483A.....	I-67, M-36	STKIT15.....	B-92	SWAC20A-34N.....	M-12
S2GBP47ASG1.....	I-69	S3GBP486A.....	I-67, M-36	STS33A-4N.....	I-62, M-31	SWAC20A-44N.....	M-12
S2GBP47ASG2HT.....	I-69	S3GBP48A.....	I-67, M-36	STS43A-4N.....	I-62, M-31	SWAC21A-34N.....	M-12
S2GBP483A.....	I-64, M-33	S4D451RMX1.....	I-68	STS44A-4N.....	I-62, M-31	SWAC21A-44N.....	M-12
S2GBP483A12.....	I-64, M-33	S4D48RMX1.....	I-68	STS44A-4NCG2.....	I-62, M-31	SWAC22A-34N.....	M-12
S2GBP483A12B2.....	I-66, M-35	S4D55RMX1.....	I-68	STS46AGNCG1.....	I-62, M-31	SWAC22A-44N.....	M-12
S2GBP483AB2.....	I-66, M-35	SB232TC14.....	E-33	SW3A20A44N8.....	M-38	SWAC23A-34N.....	M-12
S2GBP486A.....	I-64, M-33	SB232TC38.....	E-33	SW3A22A44N8.....	M-38	SWAC24A-34N.....	M-12
S2GBP486A12.....	I-64, M-33	SB23U.....	E-33	SW3A24A44N8.....	M-38	SWAC24A-44N.....	M-12
S2GBP486A12B2.....	I-66, M-35	SB252TC14.....	E-33	SW3A86A44N8.....	M-38	SWAC58A-2N.....	M-12
S2GBP486AB2.....	I-66, M-35	SB252TC38.....	E-33	SW3AB20A44N8.....	M-39	SWAC58A-34N.....	M-12
S2GBP48A.....	I-64, M-33	SB25U.....	E-33	SW3AB22A44N8.....	M-39	SWAC58A-44N.....	M-12
S2GBP48A12.....	I-64, M-33	SC2.....	A-3, H-5	SW3AB24A44N8.....	M-39	SWAC59A-2N.....	M-12
S2GBP48A12B2.....	I-66, M-35	SC2/0.....	A-3, H-5	SW3AB86A44N8.....	M-39	SWAC59A-34N.....	M-12
S2GBP48AB2.....	I-66, M-35	SC4.....	A-3, H-5	SWA18A-2N.....	M-11	SWAC59A-44N.....	M-12
S2GBP48ASG1HT.....	I-69	SCB19A.....	M-28	SWA18A-34N.....	M-11	SWAC86A-44N.....	M-12
S2GBP48ASG2.....	I-69	SCB20A.....	M-28	SWA18A-44N.....	M-11	SWAC90A-2N.....	M-12
S2GBP51ASG1.....	I-69	SCB21A.....	M-28	SWA19A-2N.....	M-11	SWAC90A-34N.....	M-12
S2GBP51ASG2HT.....	I-69	SCB22A.....	M-28	SWA19A-34N.....	M-11	SWAC90A-44N.....	M-12
S2GBP521ASG1.....	I-69	SCB24A.....	M-28	SWA19A-44N.....	M-11	SWAC91A-34N.....	M-12
S2GBP521ASG2HT.....	I-69	SCB86A.....	M-28	SWA20A-2N.....	M-11	SWAC91A-44N.....	M-12
S2GBP52ASG1.....	I-69	SD10NCP1CH.....	N-63	SWA20A-34N.....	M-11	SWAC92A-34N.....	M-12
S2GBP52ASG2HT.....	I-69	SD10NCP1LP1.....	N-63	SWA20A-44N.....	M-11	SWAC92A-44N.....	M-12
S2GBP54ASG1.....	I-69	SF2A44NL12EX.....	M-37	SWA21A-34N.....	M-11	SWAC93A-34N.....	M-12
S2GBP54ASG2HT.....	I-69	SF2A44NL18EX.....	M-37	SWA21A-44N.....	M-11	SWAC94A-34N.....	M-12
S2GBP4A1A.....	I-63, M-32	SH2GBP41A5.....	I-63, M-32	SWA22A-44N.....	M-11	SWAC94A-44N.....	M-12
S2GBP4A1A12.....	I-63, M-32	SH2GBP41A512.....	I-63, M-32	SWA23A-44N.....	M-11	SWAC96A-44N.....	M-12
S2GBP4A1A12B2.....	I-65, M-34	SH2GBP41A512B2.....	I-65, M-34	SWA24A-34N.....	M-11	SWAT18A16A-30.....	M-22
S2GBP4A1AB2.....	I-65, M-34	SH2GBP41A5B2.....	I-65, M-34	SWA24A-44N.....	M-11	SWAT18A17A-30.....	M-22
S2GBP4A45A.....	I-63, M-32	SH2GBP445A5.....	I-63, M-32	SWA444A-44N.....	M-10	SWAT18A18A-30.....	M-22
S2GBP4A45A12.....	I-63, M-32	SH2GBP445A512.....	I-63, M-32	SWA44R-44N.....	M-10	SWAT19A16A-30.....	M-22
S2GBP4A45A12B2.....	I-65, M-34	SH2GBP445A512B2.....	I-65, M-34	SWA486A-44N.....	M-10	SWAT19A17A-30.....	M-22
S2GBP4A45AB2.....	I-65, M-34	SH2GBP445A5B2.....	I-65, M-34	SWA486A-4N.....	M-10	SWAT19A18A-30.....	M-22
S2GBP4A4A.....	I-63, M-32	SH2GBP44A5.....	I-63, M-32	SWA486A-66N.....	M-10	SWAT20A17A-30.....	M-22
S2GBP4A4A12.....	I-63, M-32	SH2GBP44A512.....	I-63, M-32	SWA48A-44N.....	M-10	SWAT20A18A-30.....	M-22
S2GBP4A4A12B2.....	I-65, M-34	SH2GBP44A512B2.....	I-65, M-34	SWA493R-4N.....	M-10	SWAT20A19A-30.....	M-22
S2GBP4A4AB2.....	I-65, M-34	SH2GBP44A5B2.....	I-65, M-34	SWA54R-44N.....	M-10	SWAT21A16A-30.....	M-22
S2GBP4A45A.....	I-63, M-32	SH2GBP45A5.....	I-63, M-32	SWA58A-2N.....	M-11	SWAT21A17A-30.....	M-22
S2GBP4A45A12.....	I-63, M-32	SH2GBP45A512.....	I-63, M-32	SWA58A-34N.....	M-11	SWAT21A18A-30.....	M-22
S2GBP4A45A12B2.....	I-65, M-34	SH2GBP45A512B2.....	I-65, M-34	SWA58A-44N.....	M-11	SWAT21A19A-30.....	M-22
S2GBP4A45AB2.....	I-65, M-34	SH2GBP45A5B2.....	I-65, M-34	SWA58R-44N.....	M-10	SWAT21A20A-30.....	M-22
S2GBP4A6A.....	I-64, M-33	SH2GBP46A5.....	I-64, M-33	SWA59A-2N.....	M-11	SWAT22A18A-30.....	M-22
S2GBP4A6A12.....	I-64, M-33	SH2GBP46A512.....	I-64, M-33	SWA59A-34N.....	M-11	SWAT22A19A-30.....	M-22
S2GBP4A6A12B2.....	I-66, M-35	SH2GBP46A512B2.....	I-66, M-35	SWA59A-44N.....	M-11	SWAT22A20A-30.....	M-22
S2GBP4A6AB2.....	I-66, M-35	SH2GBP46A5B2.....	I-66, M-35	SWA86A-44N.....	M-11	SWAT24A18A-30.....	M-22
S2GBP4A83A.....	I-64, M-33	SH2GBP483A5.....	I-64, M-33	SWA90A-2N.....	M-11	SWAT24A19A-30.....	M-22
S2GBP4A83A12.....	I-64, M-33	SH2GBP483A512.....	I-64, M-33	SWA90A-34N.....	M-11	SWAT24A20A-30.....	M-22
S2GBP4A83A12B2.....	I-66, M-35	SH2GBP483A512B2.....	I-66, M-35	SWA90A-44N.....	M-11	SWAT86A20A-30.....	M-22
S2GBP4A83AB2.....	I-66, M-35	SH2GBP483A5B2.....	I-66, M-35	SWA91A-34N.....	M-11	SWAT86A21A-30.....	M-22
S2GBP4A86A.....	I-64, M-33	SH2GBP486A5.....	I-64, M-33	SWA91A-44N.....	M-11	SWAT86A22A-30.....	M-22
S2GBP4A86A12.....	I-64, M-33	SH2GBP486A512.....	I-64, M-33	SWA92A-44N.....	M-11	SWCB19A.....	M-29
S2GBP4A86A12B2.....	I-66, M-35	SH2GBP486A512B2.....	I-66, M-35	SWA93A-44N.....	M-11	SWCB20A.....	M-29
S2GBP4A86AB2.....	I-66, M-35	SH2GBP486A5B2.....	I-66, M-35	SWA94A-34N.....	M-11	SWCB22A.....	M-29
S2GBP4A8A.....	I-64, M-33	SH2GBP48A5.....	I-64, M-33	SWA94A-44N.....	M-11	SWCB24A.....	M-29
S2GBP4A8A12.....	I-64, M-33	SH2GBP48A512.....	I-64, M-33	SWA96A-44N.....	M-11	SWCB86A.....	M-29
S2GBP4A8A12B2.....	I-66, M-35	SH2GBP48A512B2.....	I-66, M-35	SWAB19A2N.....	M-18	SWHRH18A-3CH.....	M-24

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
SWHRH18A-5CH.....	M-24	SWT24A20A75.....	M-21	T108LF.....	B-32	TMH295.....	D-8
SWHRH19A-3CH.....	M-24	SWT24A21A.....	M-20	T14-10.....	B-5	TMH295SS.....	D-8
SWHRH19A-5CH.....	M-24	SWT24A22A.....	M-20	T1410BF.....	B-37	TMH322SS.....	D-8
SWHRH20A-3CH.....	M-24	SWT24A24A.....	M-20	T14-10F.....	B-27	TMH332.....	D-8
SWHRH20A-5CH.....	M-24	SWT86A20A.....	M-20	T1410LF.....	B-32	TMH69.....	D-8
SWHRH21A-3CH.....	M-24	SWT86A20A75.....	M-21	T14-14.....	B-5	TMH69SS.....	D-8
SWHRH21A-5CH.....	M-24	SWT86A21A.....	M-20	T14-14F.....	B-27	TMHG-42.....	E-27
SWHRH22A-3CH.....	M-24	SWT86A21A75.....	M-21	T14-38.....	B-5	TMHG-92.....	E-27
SWHRH22A-5CH.....	M-24	SWT86A22A.....	M-20	T14-4.....	B-5	TN10-10.....	B-9
SWHRH24A-3CH.....	M-24	SWT86A22A75.....	M-21	T14-516.....	B-5	TN1010BF.....	B-39
SWHRH24A-5CH.....	M-24	SWT86A24A.....	M-20	T14-6.....	B-5	TN10-10F.....	B-29
SWHRH86A-3CH.....	M-24	SWT86A86A.....	M-20	T146BF.....	B-37	TN10-10LF.....	B-34
SWHRH86A-5CH.....	M-24	SWVH19A-5.....	M-25	T14-6F.....	B-27	TN10-12.....	B-9
SWL18A.....	M-27	SWVH19A-7.....	M-25	T146LF.....	B-32	TN10-14.....	B-9
SWL19A.....	M-27	SWVH20A-5.....	M-25	T14-8.....	B-5	TN10-14F.....	B-29
SWL20A.....	M-27	SWVH20A-7.....	M-25	T148BF.....	B-37	TN10-38.....	B-9
SWL21A.....	M-27	SWVH22A-5.....	M-25	T14-8F.....	B-27	TN10-516.....	B-9
SWL22A.....	M-27	SWVH22A-7.....	M-25	T148LF.....	B-32	TN10-6.....	B-9
SWL24A.....	M-27	SWVH24A-5.....	M-25	T1610BF.....	B-37	TN106BF.....	B-39
SWL58A.....	M-27	SWVH86A-5.....	M-25	T1610LF.....	B-32	TN10-6F.....	B-29
SWL59A.....	M-27	SWVH86A-7.....	M-25	T166BF.....	B-37	TN10-6LF.....	B-34
SWL86A.....	M-27	SWXA20A-44N.....	M-14	T166LF.....	B-32	TN10-8.....	B-9
SWL90A.....	M-27	SWXA20A-4NK8.....	M-13	T168BF.....	B-37	TN108BF.....	B-39
SWL91A.....	M-27	SWXA22A-44N.....	M-14	T168LF.....	B-32	TN10-8F.....	B-29
SWL92A.....	M-27	SWXA22A-4NK8.....	M-13	T18-10.....	B-5	TN10-8LF.....	B-34
SWL93A.....	M-27	SWXA24A-44N.....	M-14	T18-10F.....	B-27	TN14-10.....	B-9
SWL96A.....	M-27	SWXA24A-4NK8.....	M-13	T18-14.....	B-5	TN1410BF.....	B-39
SWOH18A-3.....	M-23	SWXA86A-44N.....	M-14	T18-14F.....	B-27	TN14-10F.....	B-29
SWOH18A-5.....	M-23	SWXA86A-4NK8.....	M-13	T18-38.....	B-5	TN14-10LF.....	B-34
SWOH19A-3.....	M-23	SWXA92A-44N.....	M-14	T18-4.....	B-5	TN14-14.....	B-9
SWOH19A-5.....	M-23	SWXA92A-4NK8.....	M-13	T18-516.....	B-5	TN14-14F.....	B-29
SWOH20A-3.....	M-23	SWXA94A-44N.....	M-14	T18-6.....	B-5	TN14-38.....	B-9
SWOH20A-5.....	M-23	SWXA94A-4NK8.....	M-13	T18-6F.....	B-27	TN14-4.....	B-9
SWOH21A-5.....	M-23	SWXA96A-4NK8.....	M-13	T18-8.....	B-5	TN14-516.....	B-9
SWOH22A-3.....	M-23	SWXHP19A-5.....	M-26	T18-8F.....	B-27	TN14-6.....	B-9
SWOH22A-5.....	M-23	SWXHP20A-5.....	M-26	TBPT10.....	A-62	TN146BF.....	B-39
SWOH24A-5.....	M-23	SWXHP21A-5.....	M-26	TBPT12.....	A-62	TN14-6F.....	B-29
SWOH86A-5.....	M-23	SWXHP22A-5.....	M-26	TBPT6.....	A-62	TN14-6G1.....	B-9
SWT17A17A.....	M-19	SWXHP24A-5.....	M-26	TBPT8.....	A-62	TN14-6LF.....	B-34
SWT18A16A75.....	M-21	SWXHP59A-5.....	M-26	TFV3B12V2.....	G-23	TN14-8.....	B-9
SWT18A17A75.....	M-21	SWXHP86A-5.....	M-26	TFV3B18V2.....	G-23	TN148BF.....	B-39
SWT19A16A75.....	M-21	SWXHP90A-5.....	M-26	TFV3B6V2.....	G-23	TN14-8F.....	B-29
SWT19A17A75.....	M-21	SWXHP91A-5.....	M-26	TFV3BLU12.....	G-23	TN14-8LF.....	B-34
SWT19A18A75.....	M-21	SWXHP92A-5.....	M-26	TFV3BLU18.....	G-23	TN18-10.....	B-9
SWT19A19A.....	M-19	SWXHP94A-5.....	M-26	TMH261.....	D-8	TN1810BF.....	B-39
SWT20A17A75.....	M-21	SWXHP96A-5.....	M-26	TMH261SS.....	D-8	TN18-10F.....	B-29
SWT20A18A75.....	M-21	SWXP20A20A.....	M-17	TMH262.....	D-8	TN18-10LF.....	B-34
SWT20A19A75.....	M-21	SWXP22A22A.....	M-17	TMH262SS.....	D-8	TN18-14.....	B-9
SWT21A14A.....	M-19	SWXP24A24A.....	M-17	TMH263.....	D-8	TN18-14F.....	B-29
SWT21A15A.....	M-19	SWXP86A86A.....	M-17	TMH263SS.....	D-8	TN18-38.....	B-9
SWT21A16A.....	M-19	SWXP90A90A.....	M-17	TMH264.....	D-8	TN18-4.....	B-9
SWT21A16A75.....	M-21	SWXP92A92A.....	M-17	TMH264SS.....	D-8	TN184F.....	B-29
SWT21A17A.....	M-20	SWXP94A94A.....	M-17	TMH265.....	D-8	TN18-516.....	B-9
SWT21A17A75.....	M-21	SWXP96A96A.....	M-17	TMH265SS.....	D-8	TN18-6.....	B-9
SWT21A18A.....	M-20	T10-10.....	B-5	TMH266.....	D-8	TN186BF.....	B-39
SWT21A18A75.....	M-21	T1010BF.....	B-37	TMH267.....	D-8	TN18-6F.....	B-29
SWT21A19A.....	M-20	T10-10F.....	B-27	TMH267SS.....	D-8	TN18-6G1.....	B-9
SWT21A19A75.....	M-21	T1010LF.....	B-32	TMH268.....	D-8	TN18-6LF.....	B-34
SWT21A20A.....	M-20	T10-12.....	B-5	TMH268SS.....	D-8	TN18-8.....	B-9
SWT22A18A.....	M-20	T10-14.....	B-5	TMH269.....	D-8	TN188BF.....	B-39
SWT22A18A75.....	M-21	T10-14F.....	B-27	TMH269SS.....	D-8	TN18-8F.....	B-29
SWT22A19A.....	M-20	T10-38.....	B-5	TMH270.....	D-8	TN18-8LF.....	B-34
SWT22A19A75.....	M-21	T10-516.....	B-5	TMH270SS.....	D-8	TN20-2F.....	B-29
SWT22A20A.....	M-20	T10-6.....	B-5	TMH271.....	D-8	TN20-6F.....	B-29
SWT22A20A75.....	M-21	T106BF.....	B-37	TMH271SS.....	D-8	TOOLBAGMDLI.....	N-16, N-17, N-19
SWT22A21A.....	M-20	T10-6F.....	B-27	TMH272.....	D-8	TP10-10.....	B-8, B-92
SWT22A22A.....	M-20	T106LF.....	B-32	TMH272SS.....	D-8	TP1010BF.....	B-38
SWT24A18A75.....	M-21	T10-8.....	B-5	TMH289.....	D-8	TP10-10F.....	B-28, B-92
SWT24A19A75.....	M-21	T108BF.....	B-37	TMH294.....	D-8	TP10-10LF.....	B-33
SWT24A20A.....	M-20	T10-8F.....	B-27	TMH294SS.....	D-8		



**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
TP10-10Z	B-42	U25RTW	N-70, N-71	UB261	D-9	UCK-1UL	H-10
TP10-12	B-8	U26ART	N-70, N-71	UB262	D-9	UCK-2UL	H-10
TP10-14	B-8	U26RT	N-70, N-71	UB263	D-9	UCK-3UL	H-10
TP10-38	B-8	U26RTW	N-70, N-71	UB264	D-9	UCT26	H-18
TP10-516	B-8	U27ART	N-70, N-71	UB266	D-9	UCT26RS	H-17
TP10-6	B-8	U27RT	N-70, N-71	UB267	D-9	UCT32	H-18
TP106BF	B-38	U27RTW	N-70, N-71	UB268	D-9	UCT32RS	H-17
TP10-6F	B-28	U28ART	N-70, N-71	UB269	D-9	UCTCOVER	H-19
TP10-6LF	B-33	U28RT	N-70, N-71	UB271	D-9	UCU28AC	A-24
TP10-6Z	B-42	U28RTW	N-70, N-71	UB275	D-9	UDIEKITAL	N-59, N-71
TP10-8	B-8	U29ART	N-70, N-71	UB282	D-9	UDIEKITCU	N-59, N-71
TP108BF	B-38	U29RT	N-70, N-71	UB291	D-9	UDIEKITCUW	N-71
TP10-8F	B-28	U2CABT	N-70, N-71	UB293	D-9	UDIEKITHYGRD	N-71
TP10-8LF	B-33	U2CRT	N-70, N-71	UB294	D-9	UGS350ULDB	A-35
TP10-8Z	B-42	U2CRTW	N-70, N-71	UB300	D-9	UGSKIT2	A-34
TP14-10	B-8, B-92	U30ART	N-70, N-71	UB302	D-9	UGSKIT250	A-34
TP1410BF	B-38	U30RT	N-70, N-71	UB306	D-9	UGSKIT8	A-35
TP14-10F	B-28, B-92	U31ART	N-70, N-71	UB310	D-9	UH143	L-17
TP14-10LF	B-33	U31RT	N-70, N-71	UB311	D-9	UH153	L-17
TP14-10Z	B-42	U32ART	N-70, N-71	UB314	D-9	UH155	L-17
TP14-14	B-8	U32RT	N-70, N-71	UB315	D-9	UH163	L-17
TP14-2F	B-28	U34ART	N-70, N-71	UB317	D-9	UH165	L-17
TP14-2Z	B-42	U34RT	N-70, N-71	UB318	D-9	UH173	L-17
TP14-38	B-8	U36ART	N-70, N-71	UB319	D-9	UH175	L-17
TP14-4	B-8	U36RT	N-70, N-71	UB328	D-9	UH183	L-17
TP14-516	B-8	U38XRT	N-70	UB336	D-9	UH185	L-17
TP14-6	B-8	U39ART2	N-70, N-71	UB344	D-9	UH193	L-17
TP146BF	B-38	U39RT	N-70, N-71	UB354	D-9	UH195	L-17
TP14-6F	B-28	U3CRT	N-70	UB357	D-9	UH203	L-17
TP14-6LF	B-33	U3CRTW	N-70	UB358	D-9	UH205	L-17
TP14-6Z	B-42	U44XRT	N-70	UB383	D-9	UH225	L-17
TP14-8	B-8	U4CABT	N-70, N-71	UB384	D-9	UH13A3CH	L-32
TP148BF	B-38	U4CRT	N-70, N-71	UB390	D-9	UH14A-3	L-32
TP14-8F	B-28	U4CRTW	N-70, N-71	UB392	D-9	UH14A3CH	L-32
TP14-8LF	B-33	U5CRT	N-70, N-71	UB399	D-9	UH15A-3	L-32
TP14-8Z	B-42	U5CRTW	N-70, N-71	UB400	D-9	UH15A3CH	L-32
TP16-10	B-8	U6CABT	N-70, N-71	UB416	D-9	UH15A-5	L-32
TP1610BF	B-38	U8CABT	N-70	UB422	D-9	UH15A5CH	L-32
TP16-10F	B-28	U8CRT	N-70	UB425	D-9	UH16A3CH	L-32
TP16-10LF	B-33	U8CRTW	N-70, N-71	UB436	D-9	UH16A5CH	L-32
TP16-10Z	B-42	U997	N-71	UB437	D-9	UH17A-3	L-32
TP16-14	B-8	UB101	D-9	UB464	D-9	UH17A3CH	L-32
TP16-2F	B-28	UB1027	D-9	UB540	D-9	UH17A-5	L-32
TP16-2Z	B-42	UB1028	D-9	UC	N-71	UH17A5CH	L-32
TP16-38	B-8	UB1029	D-9	UC25R2R	H-16	UH18A-3	L-32
TP16-4	B-8	UB1030	D-9	UC25R2RS	H-16	UH18A3CH	L-32
TP16-516	B-8	UB1031	D-9	UC2834	H-13	UH18A-5	L-32
TP16-6	B-8	UB1032	D-9	UC28R	H-16	UH18A5CH	L-32
TP166BF	B-38	UB1033	D-9	UC28RS	H-16	UH19A-3	L-32
TP16-6F	B-28	UB104	D-9	UC2W28-L	H-10	UH19A3CH	L-32
TP16-6LF	B-33	UB105	D-9	UC2W30	H-13	UH19A5CH	L-32
TP16-6Z	B-42	UB106	D-9	UC3040	H-13	UH20A3CH	L-32
TP16-8	B-8	UB107	D-9	UC32R	H-16	UH20A-5	L-32
TP168BF	B-38	UB124	D-9	UC32RS	H-16	UH20A5CH	L-32
TP16-8F	B-28	UB178	D-9	UC33R	H-16	UH20A7CH	L-32
TP16-8LF	B-33	UB187	D-9	UC3444	H-13	UH21A-3	L-32
TP16-8Z	B-42	UB199	D-9	UC4W28	H-13	UH21A3CH	L-32
TSKD	N-116	UB204	D-9	UC4W28CONKIT	H-19	UH21A5CH	L-32
TSSQ	N-116	UB222	D-9	UC6W25	H-13	UH22A3CH	L-32
TTV10	B-75	UB224	D-9	UC6W25CONKIT	H-19	UH22A-5	L-32
TTV14	B-75	UB230	D-9	UC8W26-L	H-10	UH22A5CH	L-32
TTV18	B-75	UB232	D-9	UCCOVER1	H-19	UH24A-3	L-32
U1011	N-71	UB236	D-9	UCG25R	H-16	UH24A3CH	L-32
U1104	N-71	UB242	D-9	UCG25R2R	H-16	UH24A-5	L-32
U1105	N-71	UB244	D-9	UCG25R2RS	H-16	UH24A5CH	L-32
U1CART	N-70, N-71	UB249	D-9	UCG25RS	H-16	UH83A5	L-32
U1CRT1	N-70, N-71	UB254	D-9	UCG28R	H-16	UH86A5CH	L-32
U1CRT1W	N-70, N-71	UB257	D-9	UCG28RS	H-16	UHKR11A3	L-33
U25ART	N-70, N-71	UB258	D-9	UCG32R	H-16	UHKR11A5	L-33
U25RT	N-70, N-71	UB260	D-9	UCG32RS	H-16	UHKR13A3	L-33

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
UHKR13A5.....	L-33	VP4646.....	H-12	W245.....	N-73, N-74	WADRT2.....	J-16
UHKR14A3.....	L-33	VT2525.....	A-10, H-15,	W249.....	N-73, N-74	WADRT3.....	J-16
UHKR14A5.....	L-33		L-14	W25RT.....	N-73, N-74	WAS14A-2N.....	L-35
UHKR16A3.....	L-33	VT2825.....	A-10, H-15,	W25VT.....	N-73	WAS15A-2N.....	L-35
UHKR16A5.....	L-33		L-14	W26RT.....	N-73, N-74	WAS15A-34N.....	L-35
UHKR17A3.....	L-33	VT2828.....	A-10, H-15,	W26VT.....	N-73	WAS16A-2N.....	L-35
UHKR17A5.....	L-33		L-14	W27RT.....	N-73, N-74	WAS16A34N.....	L-35
UHR133.....	L-17	VT2C2C.....	A-10, H-15,	W27VT.....	N-73	WAS17A-2N.....	L-35
UHR135.....	L-17		L-14	W28K.....	N-15 - N-19,	WAS17A-34N.....	L-35
UHR153.....	L-17	VT3025.....	A-10, H-15		N-55, N-75	WAS18A-2N.....	L-35
UHR153SS.....	L-17	VT3028.....	L-14	W28RT.....	N-73, N-74	WAS18A-34N.....	L-35
UHR155.....	L-17	VT3030.....	A-10, H-15	W28VT.....	N-73	WAS18A44N.....	L-35
UHR173.....	L-17	VT3425.....	A-10, H-15	W29RT.....	N-73, N-74	WAS19A-2N.....	L-35
UHR175.....	L-17	VT3428.....	A-10, H-15	W29VT.....	N-73	WAS19A-34N.....	L-35
UHR183.....	L-17	VT3430.....	A-10, H-15	W2CRT.....	N-73, N-74	WAS19A-44N.....	L-35
UHR185.....	L-17	VT3434.....	A-10, H-15	W2CVT.....	N-73	WAS20A-2N.....	L-35
UM25N.....	N-72	VT4034.....	L-14	W30RT.....	N-73	WAS20A-34N.....	L-35
UM26N.....	N-72	VT4040.....	A-10, H-15	W30VT.....	N-73	WAS20A-44N.....	L-35
UM27N.....	N-72	VT4425.....	A-10, H-15	W31ART.....	N-73, N-74	WAS21A34N.....	L-35
UM28N.....	N-72	VT4428.....	A-10, H-15	W31RT.....	N-73, N-74	WAS22A34N.....	L-35
UM2CN.....	N-72	VT4430.....	L-14	W31VT.....	N-73	WAS22A-44N.....	L-35
UM30N.....	N-72	VT4434.....	L-14	W32RT.....	N-73	WASC15A2N.....	L-36
UM31N.....	N-72	VT4440.....	L-14	W32VT.....	N-73	WASC16A34N.....	L-36
UM33N.....	N-72	VT4444.....	L-14	W33RT.....	N-73	WASC17A2N.....	L-36
UM36N.....	N-72	VT4628.....	L-14	W33VT.....	N-73	WASC17A34N.....	L-36
UM4CN.....	N-72	VT4630.....	L-14	W34RT.....	N-73, N-74	WASC18A2N.....	L-36
UM6CN.....	N-72	VT4640.....	L-14	W34VT.....	N-73	WASC18A34N.....	L-36
UM8CN.....	N-72	VT4830.....	L-14	W36RT.....	N-73	WASC19A34N.....	L-36
UMA.....	N-72	VT4834.....	A-10, H-15	W3CRT.....	N-73, N-74	WASC19A44N.....	L-36
UMB.....	N-72	VT4840.....	L-14	W4CRT.....	N-73, N-74	WASC20A2N.....	L-36
UMC.....	N-72	VT4844.....	L-14	W4CVT.....	N-73	WASC20A34N.....	L-36
UMDIEKIT.....	N-72	VT4848.....	L-14	W5CRT.....	N-73, N-74	WASC20A44N.....	L-36
UME.....	N-72	VVA25.....	A-20, L-9	W5CVT.....	N-73	WASC21A34N.....	L-36
UO.....	N-71	VVA25-2.....	L-9	W660.....	N-73, N-74	WASC21A44N.....	L-36
UP34R.....	H-70	VVA28.....	A-20, L-9	W687.....	N-75	WASC22A34N.....	L-36
UP45R.....	H-70	VVA28-2N.....	A-20, L-9	W702.....	N-75	WASC22A44N.....	L-36
UP45R36R.....	H-70	VVA2C.....	A-20, L-9	W8CRT.....	N-73, N-74	WASC24A44N.....	L-36
UW25R.....	H-12	VVA30.....	A-20, L-9	W8CVT.....	N-73	WASC24A66N.....	L-36
UW2R.....	H-12	VVA30-2N.....	A-20, L-9	WABAG.....	J-15, N-108	WBG.....	N-56, N-57,
VA25.....	A-20, L-8	VVA30-4N.....	L-9	WAD10-15.....	J-16		N-75
VA252.....	L-8	VVA34.....	A-20, L-9	WAD10-29.....	J-16	WBS10V.....	E-134, G-30
VA28.....	A-20, L-8	VVA34-2N.....	A-20, L-9	WAD10-35.....	J-16	WBS12V.....	E-134, G-30
VA28-2N.....	A-20, L-8	VVA34-4.....	L-9	WAD336-15.....	J-16	WBS14V.....	E-134, G-30
VA2C.....	A-20, L-8	VVA34-4N.....	A-20, L-9	WAD336-29.....	J-16	WBS20V.....	E-134, G-30
VA30.....	A-20, L-8	VVA40.....	A-20, L-9	WAD336-35.....	J-16	WBS24V.....	E-134
VA30-2N.....	A-20, L-8	VVA40-2N.....	A-20, L-9	WAD40-15.....	J-16	WBS30V.....	E-134
VA34.....	A-20, L-8	VVA40-4N.....	A-20, L-9	WAD40-29.....	J-16	WBS36V.....	E-134
VA34-2N.....	A-20, L-8	VVA40-4NCG1.....	L-9	WAD40-35.....	J-16	WBS8V.....	E-134, G-30
VA344.....	L-8	VVA44-2N.....	L-9	WAD477-15.....	J-16	WCAB30R-2N.....	J-13
VA34-4N.....	A-20	VVA44-4N.....	L-9	WAD477-29.....	J-16	WCAB30R-4N.....	J-13
VA40.....	A-20, L-8	VVA46-2N.....	L-9	WAD477-35.....	J-16	WCAY39R-2N.....	J-13
VA40-2N.....	A-20, L-8	VVA46-4NCG2.....	L-9	WAD556-15.....	J-16	WCAY39R-4N.....	J-13
VA404.....	L-8	VVA46-4NCG4.....	L-9	WAD556-29.....	J-16	WCAY49R-2N.....	J-13
VA40-4N.....	A-20, L-8	VVA48-2N.....	L-9	WAD556-35.....	J-16	WCAY49R-4N.....	J-13
VA44.....	L-8	VYFT3428CCP.....	K-53	WAD795-15.....	J-16	WCB11PB.....	J-13
VA444.....	L-8	VYFT3428CCR.....	K-53	WAD795-29.....	J-16	WCB10.....	J-6
VA462N.....	L-8	VYFT3434CCP.....	K-53	WAD795-35.....	J-16	WCB10C2.....	J-9, J-10
VA4C.....	L-8	VYFT3434CCR.....	K-53	WADM33615.....	J-17	WCB11.....	J-6
VG1.....	H-9	VYFT3934CCP.....	K-53	WADM33629.....	J-17	WCB12.....	J-6
VG2.....	H-9	VYFT3934CCR.....	K-53	WADM33635.....	J-17	WCB13.....	J-6
VG3.....	H-9	VYFT4434CCP.....	K-53	WADM33635.....	J-17	WCB14.....	J-6
VG4.....	H-9	VYFT4434CCR.....	K-53	WADM336CON.....	J-17	WCB15.....	J-6
VG5.....	H-9	W161.....	N-73, N-74	WADM55629.....	J-17	WCB16.....	J-6
VP2828.....	H-12	W162.....	N-73, N-74	WADM55635.....	J-17	WCB17.....	J-6
VP3030.....	H-12	W163.....	N-73, N-74	WADM556CON.....	J-17	WCB18.....	J-6
VP3430.....	H-12	W166.....	N-73, N-74	WADM79515.....	J-17	WCB19.....	J-6
VP3434.....	H-12	W1CRT1.....	N-73, N-74	WADM79529.....	J-17	WCB20.....	J-6
VP4030.....	H-12	W1CVT.....	N-73	WADM79535.....	J-17	WCB20C2.....	J-9, J-10
VP4040.....	H-12	W239.....	N-73, N-74	WADM795CON.....	J-17	WCB20C20.....	J-9, J-10
VP4440.....	H-12	W241.....	N-73, N-74	WADRT1.....	J-16	WCB21.....	J-6

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
WCB22	J-6	WCY124	J-8	WDA8300	N-26	WEEB-LUG-8.0AS	E-123
WCB23	J-6	WCY125	J-8	WDC4500	N-26	WEEB-LUG-8.0ASHS	E-124
WCB24	J-6	WCY126	J-8	WDIEKITAL	N-74	WEEB-LUG-8.0HS	E-124
WCB25	J-6	WCY127	J-8	WDIEKITCU	N-74	WEEB-LUG-8.0OUN	E-123
WCB250C2	J-9, J-10	WCY128	J-8	WDIETREE	N-14 - N-19, N-56 - N-58, N-73, N-75, N-80, N-82	WEEB-LUG-8.0UNHS	E-124
WCB250C20	J-9, J-10	WCY129	J-8			WEEB-LUG-8.2	E-123
WCB250C250	J-9, J-10	WCY130	J-8			WEEB-LUG-8.2HS	E-124
WCB26	J-6	WCY131	J-8	WEEB-11.5	E-127	WEEB-M-KR	E-125
WCB27	J-6	WCY132	J-8	WEEB-15.8	E-131	WEEB-MSNR516	E-125
WCB28	J-6	WCY133	J-8	WEEB-6.7	E-131	WEEB-OCR	E-129
WCB2C2	J-9, J-10	WCY134	J-8	WEEB-8.0	E-131	WEEB-OSF	E-129
WCB30C2	J-9, J-10	WCY135	J-8	WEEB-8.2	E-131	WEEB-PMC	E-130
WCB40	J-6	WCY136	J-8	WEEB-9.5	E-127	WEEB-RPR	E-130
WCB40C2	J-9, J-10	WCY137	J-8	WEEB-9.5NL	E-127	WEEB-SCR	E-130
WCB40C20	J-9, J-10	WCY138	J-8	WEEB-9.5NL	E-127	WEEB-SMC-2	E-130
WCB40C40	J-9, J-10	WCY139	J-8	WEEB-ADC	E-128	WEEB-SSF	E-130
WCB41	J-6	WCY140	J-8	WEEB-ADR	E-128	WEEB-SSR	E-130
WCB42	J-6	WCY145	J-8	WEEB-ASR	E-128	WEEB-STC	E-130
WCB43	J-6	WCY48	J-6	WEEB-ATF	E-128	WEEB-UIR	E-127
WCB44	J-6	WCY49	J-6	WEEB-BMC	E-125	WEEB-UMC	E-130
WCB45	J-6	WCY50	J-6	WEEB-BMC-1	E-128	WEEB-WMC	E-130
WCB46	J-6	WCY51	J-6	WEEB-BMC2-14	E-121	WG19A	L-37
WCB47	J-6	WCY52	J-7	WEEB-BMC2-14BK	E-121	WG86A	L-37
WCB4C4	J-9, J-10	WCY53	J-7	WEEB-BMC2-14CL	E-121	WHHWB	J-14, N-108
WCBB30R-4N	J-13	WCY54	J-7	WEEB-BMC2-516	E-121	WHSCWH	J-14, N-109
WCBY39R-4N	J-13	WCY55	J-7	WEEB-BMC2-516BK	E-121	WHSGB	J-14, N-109
WCBY49R-4N	J-13	WCY56	J-7	WEEB-BMC2-516CL	E-121	WHSPBC	J-14, N-109
WCCB	J-5	WCY57	J-7	WEEB-BND.JMP6.7AS	E-118	WHSSADP	J-14, N-109
WCCLY	J-5	WCY58	J-7	WEEB-BND.JMP12	E-118	WHSTA	J-14, N-109
WCCR	J-5	WCY59	J-7	WEEB-BND.JMP12AS	E-118	WHSWB	J-14, N-109
WCCSY	J-5	WCY60	J-7	WEEB-BND.JMP18	E-118	WHSWHADP	J-14, N-109
WCHAWAS	J-14, N-109	WCY61	J-7	WEEB-BND.JMP18AS	E-118	WILEYBRAID10-12	E-120
WCR29	J-6	WCY62	J-7	WEEB-BND.JMP24	E-118	WILEYBRAID10-34	E-120
WCR30	J-6	WCY63	J-7	WEEB-BND.JMP24AS	E-118	WILEYBRAID10-916	E-120
WCR31	J-6	WCY64	J-7	WEEB-BND.JMP36	E-118	WILEYBRAID12	E-119
WCR32	J-6	WCY65	J-7	WEEB-BND.JMP36AS	E-118	WILEYBRAID12-12	E-120
WCR33	J-6	WCY66	J-7	WEEB-BND.JMP6.7	E-118	WILEYBRAID12-34	E-120
WCR34	J-6	WCY67	J-7	WEEB-BND.JMP8.0	E-118	WILEYBRAID12-38	E-119
WCR35	J-6	WCY68	J-7	WEEB-BND.JMP8.0AS	E-118	WILEYBRAID12-516	E-119
WCR36	J-6	WCY69	J-7	WEEB-BND.JMP8.2	E-118	WILEYBRAID12-916	E-120
WCR37	J-6	WCY70	J-7	WEEB-BND.JMP8.2MS	E-118	WILEYBRAID18	E-119
WCY53PB	J-13	WCY71	J-7	WEEB-BND.JMP9	E-118	WILEYBRAID18-12	E-120
WCY54PB	J-13	WCY72	J-7	WEEB-CCR	E-128	WILEYBRAID18-34	E-120
WCY63PB	J-13	WCY73	J-7	WEEB-CCR-2	E-128	WILEYBRAID18-38	E-119
WCY64PB	J-13	WCY74	J-7	WEEB-CMC	E-128	WILEYBRAID18-516	E-119
WCY65PB	J-13	WCY75	J-7	WEEB-DHF	E-128	WILEYBRAID18-916	E-120
WCY100	J-8	WCY76	J-7	WEEB-DMC	E-129	WILEYBRAID24	E-119
WCY101	J-8	WCY77	J-7	WEEB-DPF	E-129	WILEYBRAID24-12	E-120
WCY102	J-8	WCY78	J-7	WEEB-DPR	E-129	WILEYBRAID24-34	E-120
WCY103	J-8	WCY79	J-7	WEEB-DSK12	E-126	WILEYBRAID24-38	E-119
WCY104	J-8	WCY80	J-7	WEEB-DSK14	E-126	WILEYBRAID24-516	E-119
WCY105	J-8	WCY81	J-7	WEEB-DSK38	E-126	WILEYBRAID24-916	E-120
WCY106	J-8	WCY82	J-7	WEEB-DSK516	E-126	WILEYBRAID30	E-119
WCY107	J-8	WCY83	J-7	WEEB-DSK516-31	E-126	WILEYBRAID30-12	E-120
WCY108	J-8	WCY84	J-7	WEEB-DSK516-45	E-126	WILEYBRAID30-34	E-120
WCY109	J-8	WCY85	J-7	WEEB-DSKBD34	E-126	WILEYBRAID30-38	E-119
WCY110	J-8	WCY86	J-7	WEEB-ECR	E-129	WILEYBRAID30-516	E-119
WCY111	J-8	WCY87	J-7	WEEB-FBM14	E-127	WILEYBRAID30-916	E-120
WCY112	J-8	WCY88	J-7	WEEB-FBM516	E-127	WILEYBRAID36	E-119
WCY113	J-8	WCY89	J-7	WEEB-JJR	E-129	WILEYBRAID36-12	E-120
WCY114	J-8	WCY90	J-7	WEEB-KMC	E-129	WILEYBRAID36-34	E-120
WCY115	J-8	WCY91	J-7	WEEB-KSR	E-129	WILEYBRAID36-38	E-119
WCY116	J-8	WCY92	J-7	WEEB-LUG-10.3	E-123	WILEYBRAID36-516	E-119
WCY117	J-8	WCY93	J-7	WEEB-LUG-15.8	E-123	WILEYBRAID36-916	E-120
WCY118	J-8	WCY94	J-7	WEEB-LUG-15.8HS	E-124	WILEYBRAID6	E-119
WCY119	J-8	WCY95	J-7	WEEB-LUG-6.7	E-123	WILEYBRAID6-12	E-120
WCY120	J-8	WCY96	J-7	WEEB-LUG-6.7AS	E-123	WILEYBRAID6-34	E-120
WCY121	J-8	WCY97	J-7	WEEB-LUG-6.7ASHS	E-124	WILEYBRAID6-38	E-119
WCY122	J-8	WCY98	J-7	WEEB-LUG-6.7HS	E-124	WILEYBRAID6-516	E-119
WCY123	J-8	WCY99	J-7	WEEB-LUG-8.0	E-123	WILEYBRAID6-916	E-120

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
WILEYBRAID8-12.....	E-120	WSL10.....	J-11	WTRBKNHS.....	J-15, N-108	Y10AC9.....	N-93
WILEYBRAID8-34.....	E-120	WSL11.....	J-11	WTRBKNHSBAG.....	J-15, N-108	Y10AC9OEM.....	N-93
WILEYBRAID8-916.....	E-120	WSL12.....	J-11	WTRBWABAG.....	J-15, N-108	Y10D.....	N-39
WILEYBRAID9.....	E-119	WSL13.....	J-11	WTRBYK.....	J-15, N-108	Y10MRSA1.....	N-44
WILEYBRAID9-38.....	E-119	WSL14.....	J-11	WTRBYKNHS.....	J-15, N-108	Y-11.....	K-60
WILEYBRAID9-516.....	E-119	WSL2.....	J-11	WTRBYKNHSBAG.....	J-15, N-108	Y122CMR.....	N-49
WILEYLUG15.8.....	E-123	WSL3.....	J-11	WTRBYWABAG.....	J-15, N-108	Y122CMRCIKIT.....	N-50
WILEYLUG15.8HS.....	E-124	WSL4.....	J-11	WTY.....	J-15, N-108	Y122CMRKIT.....	N-50
WILEYLUG6.7.....	E-123	WSL5.....	J-11	WTYK.....	J-15, N-108	Y-15.....	K-60
WILEYLUG6.7HS.....	E-124	WSL6.....	J-11	WTYKNHS.....	J-15, N-108	Y1MRKIT.....	N-48
WILEYLUG8.0.....	E-123	WSL7.....	J-11	WTYKNHSBAG.....	J-15, N-108	Y1MRCT.....	N-48
WILEYLUG8.0HS.....	E-124	WSL8.....	J-11	WTYWABAG.....	J-15, N-108	Y1MRTCKIT.....	N-48
WILEYLUG8.2.....	E-123	WSL9.....	J-11	X1CART.....	N-55	Y-22.5.....	K-60
WILEYLUG8.2HS.....	E-124	WSLB15A.....	M-15	X1CRT.....	N-55	Y-25.....	K-60
WIPC14-1.....	E-135	WSLB16A.....	M-15	X25ART.....	N-55	Y281CR.....	C-148
WIPC14-112.....	E-135	WSLB17A.....	M-15	X25RT.....	N-55	Y2825R.....	C-148
WIPC14-12.....	E-135	WSLB18A.....	M-15	X26ART.....	N-55	Y2826R.....	C-148
WIPC14-14.....	E-135	WSLB19A.....	M-15	X26RT.....	N-55	Y2827R.....	C-148
WIPC14-34.....	E-135	WSLB20A.....	M-15	X27ART.....	N-55	Y282CR.....	C-148
WIREMIKE.....	F-16, N-105	WSLB21A.....	M-15	X27RT.....	N-55	Y284CR.....	C-148
WIREMIKECI.....	F-16, N-105	WSLB22A.....	M-15	X28ART.....	N-55	Y284WR.....	C-148
WIREMIKED.....	F-16, N-105	WSLB24A.....	M-15	X28RT.....	N-55	Y286CR.....	C-148
WS12-3.....	E-135	WSLB55A.....	M-15	X29RT.....	N-55	Y2928R.....	C-148
WS8-2.....	E-135	WSLB56A.....	M-15	X2CART.....	N-55	Y29BH.....	N-38
WLB15A.....	M-28	WSLB57A.....	M-15	X2CRT.....	N-55	Y29PL.....	N-38
WLB16A.....	M-28	WSLB58A.....	M-15	X4CART.....	N-55	Y29PLE.....	N-38
WLB17A.....	M-28	WSLB59A.....	M-15	X4CRT.....	N-55	Y29PLE1.....	N-38
WLB18A.....	M-28	WSLB86A.....	M-15	X5CRT.....	N-55	Y2CNC.....	N-62
WLB19A.....	M-28	WSLB90A.....	M-15	X6CART.....	N-55	Y3025R.....	C-148
WLB20A.....	M-28	WSLB91A.....	M-15	X8CART.....	N-55, N-73,	Y3026R.....	C-148
WLB21A.....	M-28	WSLB92A.....	M-15		N-74	Y3027R.....	C-148
WLB22A.....	M-28	WSLB94A.....	M-15	X8CRT.....	N-55	Y3028R.....	C-148
WLB24A.....	M-28	WSLB96A.....	M-15	XA132N.....	L-10	Y302CR.....	C-148
WLB55A.....	M-28	WSM1.....	J-11	XA142N.....	L-10	Y304CR.....	C-148
WLB56A.....	M-28	WSM10.....	J-11	XA144N.....	L-10	Y3126R.....	C-148
WLB57A.....	M-28	WSM11.....	J-11	XA152N.....	L-10	Y3128R.....	C-148
WLB58A.....	M-28	WSM2.....	J-11	XA154N.....	L-10	Y3129R.....	C-148
WLB59A.....	M-28	WSM3.....	J-11	XA15A-4N.....	L-29	Y3425R.....	C-148
WLB86A.....	M-28	WSM4.....	J-11	XA162N.....	L-10	Y3426R.....	C-148
WLB90A.....	M-28	WSM5.....	J-11	XA164N.....	L-10	Y3427R.....	C-148
WLB91A.....	M-28	WSM6.....	J-11	XA16A-4N.....	L-29	Y3428R.....	C-148
WLB92A.....	M-28	WSM7.....	J-11	XA172N.....	L-10	Y3429R.....	C-148
WLB94A.....	M-28	WSM8.....	J-11	XA174N.....	L-10	Y342CR.....	C-148
WLB96A.....	M-28	WSM9.....	J-11	XA184N.....	L-10	Y3430R.....	C-148
WO.....	N-56, N-57	WSS1.....	J-11	XA18A-4N.....	L-29	Y3431R.....	C-148
WPBBNBOX25.....	J-5, N-107	WSS2.....	J-11	XA194N.....	L-10	Y3432R.....	C-148
WPBRNBOX25.....	J-5, N-107	WT2B2RBYK.....	J-15	XA19A-4N.....	L-29	Y34BH.....	N-37
WPBYNBOX25.....	J-5, N-107	WT2B2RBYWABAG.....	J-15, N-108	XA204N.....	L-10	Y34BH1.....	N-37
WS14A.....	M-16	WT2BRBYK.....	J-15, N-108	XA20A-4N.....	L-29	Y34PA.....	N-37
WS15A.....	M-16	WT2BRBYWABAG.....	J-15, N-108	XA214N.....	L-10	Y34PR.....	N-37
WS16A.....	M-16	WTB.....	J-12, J-15, N-107, N-108	XA21A-4N.....	L-29	Y34PR11.....	N-37
WS17A.....	M-16			XA224N.....	L-10	Y34PR5.....	N-37
WS18A.....	M-16	WTBASY.....	N-107	XA22A-4N.....	L-29	Y35.....	N-21
WS19A.....	M-16	WTBASY1.....	J-12	XA24A-4N.....	L-29	Y35/Y39REPKITA.....	N-21, N-22, N-103
WS20A.....	M-16	WTBGBW.....	J-15, N-108	XA574N.....	L-10	Y352.....	N-21
WS21A.....	M-16	WTBGBWRBYK.....	J-15, N-108	XA594N.....	L-10	Y35B.....	N-32
WS22A.....	M-16	WTBNHS.....	J-15, N-108	XOH25.....	N-55	Y35BH.....	N-32
WS24A.....	M-16	WTCC.....	J-15, N-108	XP1313.....	L-16	Y35BH4.....	N-32
WS58A.....	M-16	WTCK.....	J-12, J-15, N-107, N-108	XP1414.....	L-16	Y35H.....	N-32
WS59A.....	M-16			XP1515.....	L-16	Y-37.5.....	K-60
WS86A.....	M-16	WTHRB1S.....	J-12, J-15, N-107, N-108	XP1616.....	L-16	Y39.....	N-22
WS90A.....	M-16			XP1717.....	L-16	Y3934R.....	C-148
WS91A.....	M-16	WTHY1S.....	J-12, J-15, N-107, N-108	XP1818.....	L-16	Y3936R.....	C-148
WS92A.....	M-16			XP1919.....	L-16	Y39BH.....	N-33
WS94A.....	M-16	WTOCBR.....	J-12, J-15, N-107, N-108	XP1919HC.....	L-16	Y4439R.....	C-148
WS96A.....	M-16			XP2020.....	L-16	Y45.....	N-30
WSBC128A.....	M-30	WTOCY.....	J-12, J-15, N-107, N-108	XP2121.....	L-16	Y46CLWSBHF.....	N-28
WSBC74A.....	M-30			XP2222.....	L-16	Y46LWBH.....	N-29
WSBC83A.....	M-30	WTRB.....	J-15, N-108	XP5656.....	L-16	Y46LWBHF.....	N-29
WSL1.....	J-11	WTRBK.....	J-15, N-108	Y1022.....	N-39		

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
Y46LWSBH.....	N-28	YA252NT14.....	C-39	YA26LNT14.....	C-17	YA292N.....	C-35
Y46LWSBHF.....	N-28	YA252NT14E1.....	C-39	YA26LNT38.....	C-17	YA292NNT.....	C-39
Y46OEM11T.....	N-60	YA252NT38.....	C-39	YA26LNT516.....	C-17	YA292NT14.....	C-39
Y46OEM11TKIT.....	N-60	YA252NTC38.....	C-35	YA26N.....	C-21	YA292NT38.....	C-39
Y46OEM12T.....	N-59	YA252NU.....	C-97	YA26TC14.....	C-21	YA292NT38E16.....	C-39
Y46OEM12TKIT.....	N-59	YA252TC14.....	C-35	YA26TC516.....	C-21	YA292NT516.....	C-39
Y46OEM12TKIT1.....	N-59	YA252TC14E2.....	C-35	YA27.....	C-21	YA292NU.....	C-97
Y46OEM12TKIT1FC.....	N-59	YA252TC38.....	C-35	YA27-2LN.....	C-29	YA292TC38.....	C-35
Y46OEM12TKITFC.....	N-59	YA252TC516.....	C-35	YA272N.....	C-35	YA292TC58E16.....	C-35
Y46OEMGUARD.....	N-59, N-60	YA25A1.....	C-200	YA272NT14.....	C-39	YA29A1.....	C-200
Y46OEMLOCATOR.....	N-59, N-60	YA25A1S60T516E.....	C-109	YA272NT38.....	C-39	YA29A3.....	C-203
Y4PC834.....	N-25	YA25A3.....	C-200	YA272NT516.....	C-39	YA29A5.....	C-203
Y4PC834MBH.....	N-36	YA25A3N69T38E.....	C-109	YA272NU.....	C-97	YA29A9.....	C-200
Y-50.....	K-60	YA25A5.....	C-203	YA272TC14E2.....	C-35	YA29L2.....	C-13
Y500CTHS.....	N-26	YA25A7.....	C-203	YA272TC38.....	C-35	YA29L2NT38.....	C-32
Y60LW.....	N-27	YA25A9.....	C-200	YA27A1.....	C-200	YA29L2NT38E16.....	C-32
Y60LWCASE.....	N-27	YA25L2-BOX.....	C-13	YA27A10S76T516E.....	C-110	YA29L-2TC38.....	C-29
Y60LWSTAND.....	N-27	YA25L2NT14.....	C-32	YA27A3.....	C-200	YA29L4.....	C-13
Y644HSCASE.....	N-23	YA25L2NT14E1.....	C-32	YA27A5.....	C-203	YA29L4TCG1.....	C-106
Y644HSXT.....	N-23	YA25L-2TC14.....	C-29	YA27A7.....	C-203	YA29L7.....	C-13
Y644MBH.....	N-34	YA25L-2TC14E1.....	C-29	YA27L2NT14.....	C-32	YA29L-BOX.....	C-13
Y6NCP1.....	N-62	YA25L-2TC14E2.....	C-29	YA27L2NT38.....	C-32	YA29LENT38.....	C-18
Y6NCP1BMNT.....	N-62, N-63	YA25L-2TC38.....	C-29	YA27L2NT516.....	C-32	YA29LENT516.....	C-18
Y6NCP1FTSW.....	N-62, N-63	YA25L4-BOX.....	C-13	YA27L-2TC14E2.....	C-29	YA29LNT38.....	C-18
Y6NCP1SD.....	N-63	YA25L4TCG1.....	C-106	YA27L-2TC38.....	C-29	YA29LTC78.....	C-13
Y-7.5.....	K-60	YA25L6-BOX.....	C-13	YA27L3.....	C-13	YA2C.....	C-20
Y750BHXT.....	N-31	YA25-LB.....	C-59	YA27L4-BOX.....	C-13	YA2C-2L.....	C-29
Y750CBHXT.....	N-31	YA25L-BOX.....	C-13	YA27L4TCG1.....	C-106	YA2C-2LN.....	C-29
Y750CHSXT.....	N-20	YA25LN50T14E.....	C-109	YA27-LB.....	C-59	YA2C2N.....	C-34
Y750HSXT.....	N-20	YA25LN64T516E.....	C-109	YA27L-BOX.....	C-13	YA2C2NT14.....	C-38
Y7AC9.....	N-60	YA25LNT10.....	C-17	YA27LNT14.....	C-17	YA2C2NT14E1.....	C-38
Y81KFT.....	N-24	YA25LNT14.....	C-17	YA27LNT38.....	C-17	YA2C2NT14E2.....	C-38
Y81KFTMBH.....	N-35	YA25LNT38.....	C-17	YA27LNT516.....	C-17	YA2C2NTC38.....	C-34
Y8AC9.....	N-59	YA25LNT516.....	C-17	YA28.....	C-21	YA2C2NU.....	C-97
Y8MRB1.....	N-42	YA25N.....	C-21	YA28-2LH114.....	H-42	YA2C2TC14.....	C-34
YA10A-TN.....	C-200	YA25TC10.....	C-21	YA28-2LH115.....	H-42	YA2C2TC14E2.....	C-34
YA12A-TN.....	C-200	YA25TC38.....	C-21	YA28-2LN.....	C-29	YA2C2TC38.....	C-34
YA15ALKIT.....	C-95	YA26.....	C-21	YA282N.....	C-35	YA2C2TC38E2.....	C-34
YA1C.....	C-20	YA26-2L.....	C-29	YA282NT14.....	C-39	YA2C2TC38E6.....	C-34
YA1C-2L.....	C-29	YA26-2LH89.....	H-42	YA282NT38.....	C-39	YA2C2TC38SL.....	C-101
YA1C-2LN.....	C-29	YA26-2LN.....	C-29	YA282NT516.....	C-39	YA2C2TC38SLBOX500.....	C-101
YA1C2N.....	C-34, C-38	YA262N.....	C-35	YA282NTC38.....	C-35	YA2C2TC516E2.....	C-34
YA1C2NT10.....	C-38	YA262NT14.....	C-39	YA282NU.....	C-97	YA2CA1.....	C-200
YA1C2NT14.....	C-38	YA262NT14E1.....	C-39	YA282TC14E2.....	C-35	YA2CA1S91T516E.....	C-109
YA1C2NT14E2.....	C-38	YA262NT38.....	C-39	YA282TC38.....	C-35	YA2CA3.....	C-200
YA1C2NU.....	C-97	YA262NT516.....	C-39	YA28A1.....	C-200	YA2CA5.....	C-200
YA1C2TC14.....	C-34	YA262NU.....	C-97	YA28A14N100T516E.....	C-110	YA2CA5S53T14E.....	C-109
YA1C2TC14E2.....	C-34	YA262TC14.....	C-35	YA28A1N100T38E.....	C-110	YA2CA9.....	C-203
YA1C2TC38.....	C-34, C-38	YA262TC14E2.....	C-35	YA28A3.....	C-200	YA2CL2-BOX.....	C-13
YA1CA1.....	C-200	YA262TC38.....	C-35	YA28A5.....	C-203	YA2CL2NT14.....	C-32
YA1CL2.....	C-13	YA26A1.....	C-200	YA28A7.....	C-203	YA2CL2NT14E1.....	C-32
YA1CL-2NT14.....	C-32	YA26A13N100T516E.....	C-110	YA28L2.....	C-13	YA2CL2NT14E2.....	C-32
YA1CL2NT14E2.....	C-32	YA26A3.....	C-203	YA28L2NT14.....	C-32	YA2CL-2TC14.....	C-29
YA1CL-2TC14.....	C-29	YA26A5.....	C-203	YA28L2NTC516.....	C-29	YA2CL-2TC14E1.....	C-29
YA1CL-2TC14E2.....	C-29	YA26A6.....	C-200	YA28L-2TC14E1.....	C-29	YA2CL-2TC14E2.....	C-29
YA1CL-2TC38.....	C-29	YA26A6N100T38E.....	C-110	YA28L-2TC14E2.....	C-29	YA2CL-2TC38.....	C-29
YA1CL4-BOX.....	C-13	YA26L2-BOX.....	C-13	YA28L-2TC38.....	C-29	YA2CL-2TC516.....	C-29
YA1CL6-BOX.....	C-13	YA26L2NT14.....	C-32	YA28L-2TC38E2.....	C-29	YA2CL4-BOX.....	C-13
YA1C-LB.....	C-59	YA26L2NT14E1.....	C-32	YA28L3.....	C-13	YA2CL6-BOX.....	C-13
YA1CL-BOX.....	C-13	YA26L-2TC14.....	C-29	YA28L4-BOX.....	C-13	YA2C-LB.....	C-59
YA1CLNT10.....	C-17	YA26L-2TC14E1.....	C-29	YA28L4TCG1.....	C-106	YA2CL-BOX.....	C-13
YA1CLNT14.....	C-17	YA26L-2TC14E2.....	C-29	YA28L56.....	C-13	YA2CLNT10.....	C-17
YA1CN.....	C-20	YA26L-2TC38.....	C-29	YA28L-BOX.....	C-13	YA2CLNT14.....	C-17
YA1CTC10.....	C-20	YA26L4TCG1.....	C-106	YA28LNT14.....	C-17	YA2CLNT516.....	C-17
YA1CTC14.....	C-20	YA26L60.....	C-13	YA28LNT38.....	C-17	YA2CN.....	C-20
YA1CTC38.....	C-20	YA26L6-BOX.....	C-13	YA28LNT516.....	C-17	YA2CTC10.....	C-20
YA25.....	C-21	YA26-LB.....	C-59	YA28TC38.....	C-21	YA2CTC14.....	C-20
YA25-2L.....	C-29	YA26L-BOX.....	C-13	YA29.....	C-21	YA2CTC38.....	C-20
YA25-2LN.....	C-29	YA26LN50T14E.....	C-109	YA29-2LH91.....	H-42	YA30.....	C-21
YA252N.....	C-35	YA26LNT10.....	C-17	YA29-2LN.....	C-29	YA30-2LH85.....	H-42

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YA30-2LN	C-30	YA31L-TC14-FX	C-50	YA34L20	C-14	YA38	C-22
YA302N	C-35	YA31L-TC34-FX	C-50	YA34L2NT12E1	C-32	YA382-FXBG2	C-80
YA302N-FXB	C-79	YA31L-TC38-FX	C-50	YA34L2NT38	C-32	YA382-FXBG3	C-80
YA302NT38	C-39	YA31L-TC516-FX	C-50	YA34L2NT38E16	C-32	YA38-2L	C-30
YA302NU	C-97	YA31L-TC58-FX	C-50	YA34L2NT38FX	C-72	YA38-2LN	C-30
YA302TC38	C-35	YA31-TC12-FXB	C-65	YA34-L2NTC38-FX	C-69	YA382N	C-36
YA30A1	C-200	YA32	C-21	YA34-L2NTC-FX	C-69	YA382N-FXB	C-80
YA30A1N131T12E	C-110	YA32-2L	C-30	YA34L-2TC12	C-30	YA382TC38	C-36
YA30A3	C-203	YA32-2LN	C-30	YA34-L2TC12-FX	C-69	YA382TC38-FXB	C-80
YA30A5	C-203	YA322N	C-35	YA34L-2TC14E2	C-30	YA38L	C-15
YA30A6	C-200	YA322N-FXB	C-79	YA34L-2TC38	C-30	YA38L2ENT38FX	C-72
YA30A6N100T38E	C-110	YA322NNT	C-40	YA34-L2TC38-FX	C-69	YA38L2NNTFX	C-72
YA30A9N100T516E	C-110	YA322NT38	C-40	YA34-L2TC516-FX	C-69	YA38L2NT38FX	C-72
YA30L	C-14	YA322NU	C-97	YA34L6	C-14	YA38-L2NTC-FX	C-69
YA30L1	C-14	YA322TC38	C-35	YA34L6N131T12E	C-109	YA38L-2TC12	C-30
YA30L24	C-14	YA322TC38-FXB	C-79	YA34L8	C-14	YA38-L2TC12-FX	C-69
YA30L24N100T38E	C-109	YA32A1	C-200	YA34L9	C-14	YA38L-2TC38	C-30
YA30L27	C-14	YA32A3	C-200, C-203	YA34LNT12	C-18	YA38-L2TC38-FX	C-69
YA30L28	C-14	YA32A5	C-203	YA34LNT38	C-18	YA38-L2TC516-FX	C-69
YA30-L2NTC-FX	C-68	YA32A8N106T516E	C-110	YA34LNTM20FX	C-54	YA38LNT12FX	C-54
YA30L-2TC-38	C-30	YA32A9	C-200	YA38LTC12-FX	C-51	YA38LNTM20FX	C-54
YA30-L2TC38-FX	C-68	YA32L	C-14	YA38L-TC12-FX	C-51	YA38L-TC38-FX	C-51
YA30L2TC516FX	C-68	YA32L1	C-14	YA38L-TC516-FX	C-51	YA38L-TC58-FX	C-51
YA30L7	C-14	YA32L14	C-14	YA38N	C-22	YA38TC12FXB	C-65
YA30LN	C-14	YA32L2NT38FX	C-72	YA39	C-22	YA38-TC58-FXB	C-65
YA30LNT14	C-18	YA32-L2NTC-FX	C-68	YA392ENNT	C-36, C-40	YA39-2L	C-30
YA30LNT38	C-18	YA32L-2TC38	C-30	YA39-2LN	C-30	YA392LNN131T12E	C-109
YA30LNT516FX	C-53	YA32L-2TC38E5	C-30	YA392N	C-36	YA392N	C-36
YA30L-TC12-FX	C-50	YA32-L2TC38-FX	C-68	YA392NNT	C-40	YA392NT38	C-36, C-40
YA30L-TC34-FX	C-50	YA32LN	C-14	YA392NT38E16	C-40	YA392NT58	C-40
YA30L-TC38-FX	C-50	YA32LNT12	C-18	YA392NTU	C-98	YA392TC38	C-36
YA30L-TC516-FX	C-50	YA32LNT38	C-18	YA39A1	C-201	YA39A1	C-201
YA30L-TC58-FX	C-50	YA32LNT38FX	C-53	YA39A1N131TD12E	C-110	YA39A3	C-201
YA30N	C-21	YA32LNT516FX	C-53	YA39A3	C-201	YA39A5	C-204
YA30-TC12-FXB	C-65	YA32L-TC100-FX	C-50	YA39A5N131TD12E	C-110	YA39A7	C-204
YA31	C-21	YA32L-TC12-FX	C-50	YA39AM2	C-204	YA39L	C-15
YA31-2LH90	H-42	YA32L-TC38-FX	C-50	YA39L	C-15	YA39L2	C-15
YA31-2LN	C-30	YA32L-TC58-FX	C-50	YA39L2ENT38E10FX	C-72	YA39L2NT12E1	C-32
YA312N	C-35	YA32LTC78	C-14	YA36L11	C-14	YA39L2NT38	C-32
YA312N-FXB	C-79	YA32N	C-21	YA36L2ENT38E10FX	C-72	YA39L2NT38E16	C-32
YA312NT38	C-40	YA32-TC12-FXB	C-65	YA36L2NNT	C-32	YA39-L2NTC-FX	C-69
YA312NT38E16	C-40	YA33	C-22	YA36L2NT38FX	C-69	YA39L-2TC12E3	C-30
YA312NU	C-97	YA33-2LN	C-30	YA36LNT12	C-18	YA39L-2TC38	C-30
YA312TC14E2	C-35	YA332N	C-35	YA36LNT38	C-18	YA39L2TC38E10FX	C-69
YA312TC38	C-35	YA33L	C-14	YA36L-TC12-FX	C-51	YA39L-2TC58	C-30
YA312TC38-FXB	C-79	YA33N	C-22	YA36L-TC58-FX	C-51	YA39L6	C-15
YA31A1	C-200	YA34	C-22	YA36LTC78	C-14	YA39L6N131T12E	C-109
YA31A1N100T516E	C-110	YA34-2L	C-30	YA36N	C-22	YA39L9	C-15
YA31A3	C-203	YA34-2LH110	H-42	YA36-TC12-FXB	C-65	YA39LNT12	C-18
YA31A5	C-203	YA34-2LH111	H-42	YA36-TC58-FXB	C-65	YA39LNT38	C-18
YA31A9N100T38E	C-110	YA34-2LN	C-30	YA37	C-22	YA39LNT58	C-18
YA31L	C-14	YA342LNN119T12E	C-109	YA37-2L	C-30	YA39N	C-22
YA31L11	C-14	YA342LNN131T12E	C-109	YA37-2LN	C-30	YA3C	C-20
YA31L2NT38	C-32	YA342N	C-35	YA372N	C-36	YA3C-2L	C-29
YA31L2NT38E16	C-32	YA342N-FXB	C-79	YA37L	C-15	YA3C2N	C-34
YA31L2NT38FX	C-71	YA342NNT	C-40	YA37L1	C-15	YA3C2NU	C-96
YA31L-2NTC516	C-30	YA342NT38	C-40	YA37N	C-22	YA3C2TC14	C-34
YA31-L2NTC-FX	C-68	YA342NT38E16	C-40				
YA31L-2TC12	C-30	YA342NT58	C-40				
YA31-L2TC12-FX	C-68	YA342NU	C-97				
YA31L-2TC14E2	C-30	YA342TC14E2	C-35				
YA31L-2TC38	C-30	YA342TC38	C-35				
YA31-L2TC38-FX	C-68	YA342TC38-FXB	C-79				
YA31L36	C-14	YA34A1	C-200				
YA31L4TCG1	C-106	YA34A3	C-203				
YA31L7	C-14	YA34A3N131T12E	C-110				
YA31LNT12	C-18	YA34A5	C-203				
YA31L-NT12-FX	C-50, C-53	YA34A7N131T12E	C-110				
YA31LNT38	C-18	YA34A8N131T38E	C-110				
YA31L-TC12-FX	C-50	YA34L	C-14				

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YA3C2TC14E2	C-34	YA44L-TC58-FX	C-51	YA5C-LB	C-59	YA-A-KIT1	C-205
YA3C2TC38	C-34	YA44N	C-22	YA5CN	C-20	YA-AKIT2	C-205
YA3C2TC38E2	C-34	YA44-TC58-FXB	C-65	YA5CTC14FXB	C-64	YA-AKIT3	C-205
YA3C2TC38-FXB	C-78	YA45	C-22	YA6C	C-20	YAB25-2LH70	H-42
YA3C2TC38SL	C-101	YA452N	C-36	YA6C-2L	C-28	YAB25-2LH71	H-42
YA3C2TC38SLBOX500	C-101	YA452NU	C-98	YA6C-2L51	C-28	YAB2C-2LH74	H-42
YA3C2TC516-FXB	C-78	YA4532N	C-36	YA6C-2L52	C-28	YAB2C2LH75	H-42
YA3CL	C-12	YA453LBOX	C-15	YA6C2LN	C-28	YAB344N	C-46
YA3CL-2TC14	C-29	YA454N	C-46	YA6C2N	C-34	YAB364N	C-46
YA3CL-2TC38	C-29	YA454NU	C-98	YA6C2NT8	C-38	YAB394N	C-46
YA3C-LB	C-59	YA45A5	C-204	YA6C2NU	C-96	YAB4C-2LH72	H-42
YA3CLNT14	C-17	YA45L	C-15	YA6C2TC14	C-34	YACCASE	N-93
YA3CLNT516	C-17	YA45L2NT38FX	C-72	YA6C2TC14E1	C-34	YACFC	N-59, N-93
YA3CN	C-20	YA46	C-22	YA6C2TC14E2	C-34	YAD10-10	B-5
YA3CTC14	C-20	YA462N	C-36	YA6C2TC38	C-34	YAD1010F	B-27
YA3CTC38	C-20	YA462N-FXB	C-80	YA6C2TC38E2	C-34	YAD10-14	B-5
YA40	C-22	YA462NU	C-98	YA6C2TC38E6	C-34	YAD1014F	B-27
YA40-2L	C-30	YA464N	C-46	YA6C2TC38SL	C-101	YAD10-14M	B-5
YA40-2LN	C-30	YA464NU	C-98	YA6C2TC38SLBOX500	C-101	YAD10-38	B-5
YA402N	C-36	YA46A3	C-204	YA6CA1	C-200	YAD10-38M	B-5
YA402N-FXB	C-80	YA46A5	C-204	YA6CA3	C-200	YAD10-516	B-5
YA402NU	C-98	YA46L	C-15	YA6CL1-BOX	C-12	YAD10-516M	B-5
YA40L	C-15	YA46N	C-22	YA6CL-2TC10	C-28	YAD10-6	B-5
YA40L2NNTFX	C-72	YA46-TC58-FXB	C-65	YA6CL-2TC14	C-28	YAD106F	B-27
YA40-L2NTC-FX	C-69	YA47	C-22	YA6CL-2TC14E	C-28	YAD10-8	B-5
YA40L-2TC38	C-30	YA472N	C-36	YA6CL-2TC14E1	C-28	YAD108F	B-27
YA40-L2TC38-FX	C-69	YA472NU	C-98	YA6CL-2TC14E2	C-28	YAD10-8M	B-5
YA40LENT12FX	C-54	YA474N	C-46	YA6CL2TC14E2SL	C-100	YAD14-10	B-5
YA40L-TC12-FX	C-51	YA47N	C-22	YA6CL-2TC38	C-28	YAD1410F	B-27
YA40L-TC38-FX	C-51	YA48	C-22	YA6CL-2TC516	C-28	YAD14-10M	B-5
YA40L-TC516-FX	C-51	YA482N	C-36	YA6CL-2TC516E2	C-28	YAD14-14	B-5
YA40L-TC58-FX	C-51	YA482NU	C-98	YA6CL3-BOX	C-12	YAD1414F	B-27
YA40-TC58-FXB	C-65	YA484N	C-46	YA6CL4-BOX	C-12	YAD14-14M	B-5
YA41	C-22	YA4864N	C-46	YA6CL-6	C-12	YAD14-38	B-5
YA41-2L	C-30	YA48A3	C-204	YA6CL-BOX	C-12	YAD14-38M	B-5
YA412N	C-36	YA48L	C-15	YA6CLNT6	C-17	YAD14-4	B-5
YA41L	C-15	YA48N	C-22	YA6CN	C-20	YAD14-516	B-5
YA41N	C-22	YA4C	C-20	YA6CTC10	C-20	YAD14-6	B-5
YA42A1	C-201	YA4C-2L	C-28	YA6CTC38	C-20	YAD146F	B-27
YA42A3	C-201	YA4C-2LN	C-28	YA6CTC516	C-20	YAD14-6M	B-5
YA42A5	C-204	YA4C2N	C-34	YA6CTC8	C-20	YAD14-8	B-5
YA42A7	C-204	YA4C2NT10	C-38	YA8C-2LN	C-28	YAD148F	B-27
YA44	C-22	YA4C2NT14	C-38	YA8C2NT8	C-38	YAD14-8M	B-5
YA44-2L	C-30	YA4C2NU	C-96	YA8C2NU	C-96	YAD18-10	B-5
YA44-2LN	C-30	YA4C2TC14	C-34	YA8C2TC14	C-34	YAD1810F	B-27
YA442N	C-36	YA4C2TC14E2	C-34	YA8C2TC14E2	C-34	YAD18-10M	B-5
YA442N-FXB	C-80	YA4C2TC38	C-34	YA8C2TC14E2-FXB	C-78	YAD18-14	B-5
YA442NU	C-98	YA4CA1	C-200	YA8C2TC38	C-34	YAD1814F	B-27
YA442TC38	C-36	YA4CA3	C-200	YA8C2TC38-FXB	C-78	YAD18-14M	B-5
YA442TC38-FXB	C-80	YA4CA6	C-200	YA8CA1	C-200	YAD18-38	B-5
YA444N	C-46	YA4CL1-BOX	C-12	YA8CA3	C-200	YAD18-4	B-5
YA444NU	C-98	YA4CL-2TC14	C-28	YA8CA3S56T14E	C-109	YAD18-4M	B-5
YA44A1	C-201	YA4CL-2TC14E1	C-28	YA8CL1-BOX	C-12, C-49	YAD18-516	B-5
YA44A3	C-204	YA4CL-2TC14E2	C-28	YA8CL2-BOX	C-12, C-49	YAD18-6	B-5
YA44L	C-15	YA4CL-2TC38	C-28	YA8C-L2TC10	C-28, C-67	YAD186F	B-27
YA44L2	C-15	YA4CL-2TC516	C-28	YA8CL-2TC10E2	C-28	YAD18-6M	B-5
YA44L23	C-15	YA4CL3-BOX	C-12	YA8C-L2TC14	C-28, C-67	YAD18-8	B-5
YA44L2NNTFX	C-72	YA4CL4-BOX	C-12	YA8C-L2TC14E1	C-28, C-67	YAD188F	B-27
YA44L2NNTFXSL	C-100	YA4CL6-BOX	C-12	YA8C-L2TC14E2	C-28, C-67	YAD18-8M	B-5
YA44L2NT38FX	C-72	YA4C-LB	C-59	YA8C-L2TC38	C-28, C-67	YAD1CM10E38	B-6
YA44L2NTC12E24	C-32	YA4CL-BOX	C-12	YA8CL3-BOX	C-12, C-49	YAD1CM12E12	B-6
YA44-L2NTC-FX	C-69	YA4CLNT10	C-17	YA8CL4-BOX	C-12, C-49	YAD1CM16E58	B-6
YA44L-2TC12	C-30	YA4CN	C-20	YA8C-LB	C-59	YAD1CM20E34	B-6
YA44-L2TC12E3-FX	C-69	YA4CTC10	C-20	YA8CL-BOX	C-12, C-49	YAD1CM6E14	B-6
YA44-L2TC12-FX	C-69	YA4CTC38	C-20	YA8CLNT6	C-17	YAD1CM8E516	B-6
YA44-L2TC38-FX	C-69	YA5C	C-20	YA8CLNT8	C-17	YAD25M10E38	B-6
YA44-L2TC58-FX	C-69	YA5C-2L	C-28	YA8CTC10	C-20	YAD25M12E12	B-6
YA44LNT12FX	C-54	YA5C2N	C-34	YA8CTC14	C-20	YAD25M16E58	B-6
YA44LNT38FX	C-54	YA5C2NU	C-96	YA8C-TC14-FXB	C-64	YAD25M20E34	B-6
YA44L-TC12-FX	C-51	YA5CL	C-12	YA8CTC38	C-20	YAD25M6E14	B-6

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YAD25M8E516	B-6	YAE10N2BOX	B-11	YAE14NBOX	B-11	YAE22N65F	B-30
YAD26M10E38	B-7	YAE10N2M	B-11	YAE14NM	B-11	YAE22N65FBOX	B-30
YAD26M12E12	B-7	YAE10N3	B-11	YAE14Z2	B-43	YAE22N65FM	B-30
YAD26M16E58	B-7	YAE10N3BOX	B-11	YAE14Z2BOX	B-43	YAE22N66F	B-30
YAD26M20E34	B-7	YAE10N3M	B-11	YAE14Z3	B-43	YAE22N66FBOX	B-30
YAD26M6E14	B-7	YAE10N4	B-11	YAE14Z3BOX	B-43	YAE22N66FM	B-30
YAD26M8E516	B-7	YAE10N4BOX	B-11	YAE14Z4	B-43	YAE22Z1	B-43
YAD27M10E38	B-7	YAE10N4M	B-11	YAE14Z4BOX	B-43	YAE22Z1BOX	B-43
YAD27M12E12	B-7	YAE10N5	B-11	YAE18G43F	B-30	YAE22Z2	B-43
YAD27M16E58	B-7	YAE10N5BOX	B-11	YAE18G43FBOX	B-30	YAE22Z2BOX	B-43
YAD27M20E34	B-7	YAE10N5M	B-11	YAE18G43FM	B-30	YAE22Z3	B-43
YAD27M8E516	B-7	YAE10N79	B-11	YAE18N	B-11	YAE22Z3BOX	B-43
YAD28M10E38	B-7	YAE10N79BOX	B-11	YAE18N104BFBOX	B-40	YAEBAF1CNTN	C-215
YAD28M12E12	B-7	YAE10N80FBOX	B-30	YAE18N104LFBOX	B-35	YAEBAF1CNTNOEM	C-215
YAD28M16E58	B-7	YAE10N81FBOX	B-30	YAE18N105BFBOX	B-40	YAEBAF1CPTN	C-215
YAD28M20E34	B-7	YAE10N82FBOX	B-30	YAE18N105LFBOX	B-35	YAEBAF1CPTNOEM	C-215
YAD28M6E14	B-7	YAE10N83FBOX	B-30	YAE18N106BFBOX	B-40	YAEBAF25NTN	C-215
YAD28M8E516	B-7	YAE10NBOX	B-11	YAE18N106LFBOX	B-35	YAEBAF25NTNOEM	C-215
YAD2CM10E38	B-6	YAE10NM	B-11	YAE18N15	B-11	YAEBAF25PTN	C-215
YAD2CM12E12	B-6	YAE12N	B-11	YAE18N15BOX	B-11	YAEBAF25PTNOEM	C-215
YAD2CM16E58	B-6	YAE12N1	B-11	YAE18N15M	B-11	YAEBAF26NTN	C-215
YAD2CM20E34	B-6	YAE12N1BOX	B-11	YAE18N2	B-11	YAEBAF26NTNOEM	C-215
YAD2CM6E14	B-6	YAE12N1M	B-11	YAE18N21	B-11	YAEBAF26PTN	C-215
YAD2CM8E516	B-6	YAE12N2	B-11	YAE18N21BOX	B-11	YAEBAF26PTNOEM	C-215
YAD30M10E38	B-7	YAE12N2BOX	B-11	YAE18N21M	B-11	YAEBAF27NTN	C-215
YAD30M12E12	B-7	YAE12N2M	B-11	YAE18N24	B-11	YAEBAF27NTNOEM	C-215
YAD30M16E58	B-7	YAE12N7	B-11	YAE18N24BOX	B-11	YAEBAF27PTN	C-215
YAD30M20E34	B-7	YAE12N7BOX	B-11	YAE18N24M	B-11	YAEBAF27PTNOEM	C-215
YAD31M10E38	B-7	YAE12N7M	B-11	YAE18N26	B-11	YAEBAF28NTN	C-215
YAD31M12E12	B-7	YAE12N9	B-11	YAE18N26BOX	B-11	YAEBAF28NTNOEM	C-215
YAD31M16E58	B-7	YAE12N9BOX	B-11	YAE18N26M	B-11	YAEBAF28PTN	C-215
YAD31M20E34	B-7	YAE12N9M	B-11	YAE18N2BOX	B-11	YAEBAF28PTNOEM	C-215
YAD33M10E38	B-7	YAE12NBOX	B-11	YAE18N2M	B-11	YAEBAF28CNTN	C-215
YAD33M12E12	B-7	YAE12NM	B-11	YAE18N3	B-11	YAEBAF2CNTNOEM	C-215
YAD33M16E58	B-7	YAE12Z2	B-43	YAE18N3BOX	B-11	YAEBAF2CPTN	C-215
YAD33M20E34	B-7	YAE12Z2BOX	B-43	YAE18N3M	B-11	YAEBAF2CPTNOEM	C-215
YAD36M10E38	B-7	YAE12Z3	B-43	YAE18N56F	B-30	YAEBAS1CNTN	C-214
YAD36M12E12	B-7	YAE12Z3BOX	B-43	YAE18N56FBOX	B-30	YAEBAS1CNTNOEM	C-214
YAD36M16E58	B-7	YAE12Z4	B-43	YAE18N57F	B-30	YAEBAS1CPTN	C-214
YAD36M20E34	B-7	YAE12Z4BOX	B-43	YAE18N57FBOX	B-30	YAEBAS1CPTNOEM	C-214
YAD4CM10E38	B-6	YAE14N	B-11	YAE18N57FM	B-30	YAEBAS2CNTN	C-214
YAD4CM12E12	B-6	YAE14N1	B-11	YAE18N58FBOX	B-30	YAEBAS25NTNOEM	C-214
YAD4CM16E58	B-6	YAE14N107BFBOX	B-40	YAE18N60F	B-30	YAEBAS25PTN	C-214
YAD4CM20E34	B-6	YAE14N107LFBOX	B-35	YAE18N60FBOX	B-30	YAEBAS25PTNOEM	C-214
YAD4CM5E10	B-6	YAE14N108BFBOX	B-40	YAE18N60FM	B-30	YAEBAS26NTN	C-214
YAD4CM6E14	B-6	YAE14N108LFBOX	B-35	YAE18NBOX	B-11	YAEBAS26NTNOEM	C-214
YAD4CM8E516	B-6	YAE14N109BFBOX	B-40	YAE18NM	B-11	YAEBAS26PTN	C-214
YAD6CM10E38	B-6	YAE14N109LFBOX	B-35	YAE18Z1	B-43	YAEBAS26PTNOEM	C-214
YAD6CM12E12	B-6	YAE14N1BOX	B-11	YAE18Z1BOX	B-43	YAEBAS27NTN	C-214
YAD6CM5E10	B-6	YAE14N1M	B-11	YAE18Z2	B-43	YAEBAS27NTNOEM	C-214
YAD6CM6E14	B-6	YAE14N2	B-11	YAE18Z2BOX	B-43	YAEBAS27PTN	C-214
YAD6CM8E516	B-6	YAE14N2BOX	B-11	YAE18Z3	B-43	YAEBAS27PTNOEM	C-214
YAD8CM10E38	B-6	YAE14N2M	B-11	YAE18Z3BOX	B-43	YAEBAS28NTN	C-214
YAD8CM12E12	B-6	YAE14N3	B-11	YAE18Z4	B-43	YAEBAS28NTNOEM	C-214
YAD8CM16E58	B-6	YAE14N3BOX	B-11	YAE18Z4BOX	B-43	YAEBAS28PTN	C-214
YAD8CM4E8	B-6	YAE14N3M	B-11	YAE22G12	B-10	YAEBAS28PTNOEM	C-214
YAD8CM5E10	B-6	YAE14N4	B-11	YAE22G12BOX	B-10	YAEBAS2CNTN	C-214
YAD8CM6E14	B-6	YAE14N43	B-11	YAE22G13	B-10	YAEBAS2CNTNOEM	C-214
YAD8CM8E516	B-6	YAE14N43BOX	B-11	YAE22G13BOX	B-10	YAEBAS2CPTN	C-214
YAE10N	B-11	YAE14N43M	B-11	YAE22G13M	B-10	YAEBAS2CPTNOEM	C-214
YAE10N11	B-11	YAE14N4BOX	B-11	YAE22G14	B-10	YAEBAS4CNTN	C-214
YAE10N110BFBOX	B-40	YAE14N4M	B-11	YAE22G14BOX	B-10	YAEBAS4CNTNOEM	C-214
YAE10N110LFBOX	B-35	YAE14N76F	B-30	YAE22G15	B-10	YAEBAS4CPTN	C-214
YAE10N111BFBOX	B-40	YAE14N76FBOX	B-30	YAE22G15BOX	B-10	YAEBAS4CPTNOEM	C-214
YAE10N111LFBOX	B-35	YAE14N77F	B-30	YAE22G16	B-10	YAEBAS6CNTN	C-214
YAE10N112BFBOX	B-40	YAE14N77FBOX	B-30	YAE22G16BOX	B-10	YAEBAS6CNTNOEM	C-214
YAE10N112LFBOX	B-35	YAE14N77FM	B-30	YAE22G16M	B-10	YAEBAS6CPTN	C-214
YAE10N11BOX	B-11	YAE14N78F	B-30	YAE22G18	B-10	YAEBAS6CPTNOEM	C-214
YAE10N11M	B-11	YAE14N78FBOX	B-30	YAE22G18BOX	B-10	YAES10K11	B-14
YAE10N2	B-11	YAE14N78FM	B-30	YAE22G18M	B-10	YAES10K11T1	B-14



**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YAES10K12.....	B-14	YAEV14BOX.....	B-19	YAEV6C-H4.....	B-21	YAG25LTC14FX.....	C-56
YAES10K13.....	B-14	YAEV18.....	B-19	YAEV6C-L.....	B-20	YAG25LTC14LD.....	C-84
YAES10K14.....	B-14	YAEV18BOX.....	B-19	YAEV6C-L1.....	B-20	YAG25LTC38FX.....	C-56
YAES10K56.....	B-14	YAEV1C-H.....	B-21	YAEV6C-L10.....	B-20	YAG25LTC38LD.....	C-84
YAES10K57.....	B-14	YAEV1C-H1.....	B-21	YAEV6C-L2.....	B-20	YAG25LTC516FX.....	C-56
YAES10K58.....	B-14	YAEV1C-H2.....	B-21	YAEV6C-L4.....	B-20	YAG25LTC516LD.....	C-84
YAES10N11.....	B-9	YAEV1C-H3.....	B-21	YAEV6C-RH.....	B-25	YAG26L-2NTC-LD.....	C-89
YAES10N11F.....	B-29	YAEV1C-L.....	B-20	YAEV6C-RH1.....	B-25	YAG26L-2TC14E2-LD.....	C-89
YAES10N12.....	B-9	YAEV1C-L1.....	B-20	YAEV6C-RS.....	B-24	YAG26L-2TC14-LD.....	C-89
YAES10N12F.....	B-29	YAEV1C-L2.....	B-20	YAEV6C-RS1.....	B-24	YAG26L-2TC38-LD.....	C-89
YAES10N13.....	B-9	YAEV1C-L3.....	B-20	YAEV8C-H.....	B-21	YAG26L-2TC516-LD.....	C-89
YAES10N14.....	B-9	YAEV1C-RH.....	B-25	YAEV8C-H1.....	B-21	YAG26LTC10LD.....	C-85
YAES10N56.....	B-9	YAEV1C-RH2.....	B-25	YAEV8C-H14.....	B-21	YAG26LTC12FX.....	C-56
YAES10N56F.....	B-29	YAEV1C-RS.....	B-24	YAEV8C-H2.....	B-21	YAG26LTC12LD.....	C-85
YAES10N57.....	B-9	YAEV1C-RS2.....	B-24	YAEV8C-H3.....	B-21	YAG26LTC14FX.....	C-56
YAES10N57F.....	B-29	YAEV25-H.....	B-22	YAEV8C-H4.....	B-21	YAG26LTC14LD.....	C-85
YAES10N58.....	B-9	YAEV25-H1.....	B-22	YAEV8C-L.....	B-20	YAG26LTC34LD.....	C-85
YAES14K10.....	B-14	YAEV25-H2.....	B-22	YAEV8C-L1.....	B-20	YAG26LTC38FX.....	C-56
YAES14K53.....	B-14	YAEV25-H3.....	B-22	YAEV8C-L14.....	B-20	YAG26LTC38LD.....	C-85
YAES14K54.....	B-14	YAEV25-H4.....	B-22	YAEV8C-L14BOX.....	B-20	YAG26LTC516FX.....	C-56
YAES14K6.....	B-14	YAEV25-L.....	B-20	YAEV8C-L1BOX.....	B-20	YAG26LTC516LD.....	C-85
YAES14K7.....	B-14	YAEV25-L1.....	B-20	YAEV8C-L2.....	B-20	YAG26LTC58LD.....	C-85
YAES14K8.....	B-14	YAEV25-L2.....	B-20	YAEV8C-L2BOX.....	B-20	YAG27L-2NTC-LD.....	C-89
YAES14K9.....	B-14	YAEV25-L3.....	B-20	YAEV8C-L3.....	B-20	YAG27L-2TC14E2-LD.....	C-89
YAES14N10.....	B-9	YAEV25-L4.....	B-20	YAEV8C-L3BOX.....	B-20	YAG27L-2TC14-LD.....	C-89
YAES14N52.....	B-9	YAEV25-RH.....	B-25	YAEV8C-L4.....	B-20	YAG27L-2TC38-LD.....	C-89
YAES14N53.....	B-9	YAEV25-RS.....	B-24	YAEV8C-L4BOX.....	B-20	YAG27L-2TC516-LD.....	C-89
YAES14N53F.....	B-29	YAEV26-H.....	B-22	YAEV8C-LBOX.....	B-20	YAG27LTC10LD.....	C-85
YAES14N54.....	B-9	YAEV26-H1.....	B-22	YAEV8C-RH.....	B-25	YAG27LTC12FX.....	C-56
YAES14N54F.....	B-29	YAEV26-H12.....	B-22	YAEV8C-RH1.....	B-25	YAG27LTC12LD.....	C-85
YAES14N6.....	B-9	YAEV26-H2.....	B-22	YAEV8C-RS.....	B-24	YAG27LTC14FX.....	C-56
YAES14N6F.....	B-29	YAEV26-H3.....	B-22	YAEV8C-RS1.....	B-24	YAG27LTC14LD.....	C-85
YAES14N7.....	B-9	YAEV26-L.....	B-20	YAFW10HS.....	B-79	YAG27LTC38FX.....	C-56
YAES14N8.....	B-9	YAEV26-L1.....	B-20	YAFW10N.....	B-78	YAG27LTC38LD.....	C-85
YAES14N8F.....	B-29	YAEV26-L2.....	B-20	YAFW10NG.....	B-79	YAG27LTC516FX.....	C-56
YAES14N9.....	B-9	YAEV26-L3.....	B-20	YAFW10P.....	B-78	YAG27LTC516LD.....	C-85
YAES18K1.....	B-14	YAEV26-RH.....	B-25	YAFW14HS.....	B-79	YAG28L-2TC138-LD.....	C-89
YAES18K2.....	B-14	YAEV26-RS.....	B-24	YAFW14N.....	B-78	YAG28L-2NTC-LD.....	C-89
YAES18K3.....	B-14	YAEV2C-H.....	B-21	YAFW14NG.....	B-79	YAG28L-2TC12E1-LD.....	C-89
YAES18K4.....	B-14	YAEV2C-H1.....	B-21	YAFW14P.....	B-78	YAG28L-2TC12-LD.....	C-89
YAES18K49.....	B-14	YAEV2C-H2.....	B-21	YAFW18HS.....	B-79	YAG28L-2TC14E2-LD.....	C-89
YAES18K5.....	B-14	YAEV2C-H3.....	B-21	YAFW18N.....	B-78	YAG28L-2TC14-LD.....	C-89
YAES18K50.....	B-14	YAEV2C-H4.....	B-21	YAFW18NG.....	B-79	YAG28L-2TC38-LD.....	C-89
YAES18N1.....	B-9	YAEV2C-L.....	B-20	YAFW18P.....	B-78	YAG28L-2TC516-LD.....	C-89
YAES18N1F.....	B-29	YAEV2C-L1.....	B-20	YAFX15CLKIT.....	C-95	YAG28LTC12FX.....	C-56
YAES18N2.....	B-9	YAEV2C-L2.....	B-20	YAG18TC516LD.....	C-84	YAG28LTC12LD.....	C-85
YAES18N3.....	B-9	YAEV2C-L3.....	B-20	YAG1CL-2NTC-LD.....	C-88	YAG28LTC14FX.....	C-56
YAES18N3F.....	B-29	YAEV2C-L4.....	B-20	YAG1CL-2TC14E1-LD.....	C-88	YAG28LTC14LD.....	C-85
YAES18N4.....	B-9	YAEV2C-RH.....	B-25	YAG1CL-2TC14E2-LD.....	C-88	YAG28LTC38FX.....	C-56
YAES18N48.....	B-9	YAEV2C-RH1.....	B-25	YAG1CL-2TC14-LD.....	C-88	YAG28LTC38LD.....	C-85
YAES18N49.....	B-9	YAEV2C-RS.....	B-24	YAG1CL-2TC38-LD.....	C-88	YAG28LTC516FX.....	C-56
YAES18N49F.....	B-29	YAEV2C-RS1.....	B-24	YAG1CL-2TC516-LD.....	C-88	YAG28LTC516LD.....	C-85
YAES18N5.....	B-9	YAEV4C-H.....	B-21	YAG1CLTC10LD.....	C-84	YAG28LTC516N66LD.....	C-85
YAES18N50.....	B-9	YAEV4C-H2.....	B-21	YAG1CLTC12FX.....	C-56	YAG28LTC58LD.....	C-85
YAES18N50F.....	B-29	YAEV4C-H3.....	B-21	YAG1CLTC12LD.....	C-84	YAG29L-2NT38-LD.....	C-89
YAEV10.....	B-19	YAEV4C-H4.....	B-21	YAG1CLTC14FX.....	C-56	YAG29L-2NTC-LD.....	C-89
YAEV10BOX.....	B-19	YAEV4C-H5.....	B-21	YAG1CLTC14LD.....	C-84	YAG29L-2TC12E1-LD.....	C-89
YAEV10-L36.....	B-19	YAEV4C-L.....	B-20	YAG1CLTC38FX.....	C-56	YAG29L-2TC12-LD.....	C-89
YAEV10-L36BOX.....	B-19	YAEV4C-L2.....	B-20	YAG1CLTC38LD.....	C-84	YAG29L-2TC14E2-LD.....	C-89
YAEV10-T11.....	B-19	YAEV4C-L3.....	B-20	YAG1CLTC516FX.....	C-56	YAG29L-2TC14-LD.....	C-89
YAEV10-T11BOX.....	B-19	YAEV4C-L4.....	B-20	YAG1CLTC516LD.....	C-84	YAG29L-2TC38-LD.....	C-89
YAEV10-T2.....	B-19	YAEV4C-L5.....	B-20	YAG25L-2NTC-LD.....	C-89	YAG29L-2TC516-LD.....	C-89
YAEV10-T2BOX.....	B-19	YAEV4C-RH.....	B-25	YAG25L-2TC12E1-LD.....	C-89	YAG29LTC12FX.....	C-57
YAEV10-T3.....	B-19	YAEV4C-RH2.....	B-25	YAG25L-2TC14E2-LD.....	C-89	YAG29LTC12LD.....	C-85
YAEV10-T3BOX.....	B-19	YAEV4C-RS.....	B-24	YAG25L-2TC14-LD.....	C-89	YAG29LTC34LD.....	C-85
YAEV10-T4.....	B-19	YAEV4C-RS2.....	B-24	YAG25L-2TC38-LD.....	C-89	YAG29LTC38FX.....	C-57
YAEV10-T4BOX.....	B-19	YAEV6C-H.....	B-21	YAG25L-2TC516E2-LD.....	C-89	YAG29LTC38LD.....	C-85
YAEV10-T7.....	B-19	YAEV6C-H1.....	B-21	YAG25L-2TC516-LD.....	C-89	YAG29LTC516LD.....	C-85
YAEV10-T7BOX.....	B-19	YAEV6C-H10.....	B-21	YAG25LTC12FX.....	C-56	YAG29LTC58FX.....	C-57
YAEV14.....	B-19	YAEV6C-H2.....	B-21	YAG25LTC12LD.....	C-84	YAG2CL-2NTC-LD.....	C-88

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YAG2CL-2TC14E1-LD.....	C-88	YAG38LTC12FX.....	C-57	YAG8CL-2TC38-LD.....	C-88	YAK29A-2G1.....	H-79
YAG2CL-2TC14E2-LD.....	C-88	YAG38LTC12LD.....	C-86	YAG8CLTC10LD.....	C-84	YAK2CA2G1.....	H-79
YAG2CL-2TC14-LD.....	C-88	YAG38LTC38FX.....	C-57	YAG8CLTC12FX.....	C-56	YAK2CA2G2.....	H-79
YAG2CL-2TC38-LD.....	C-88	YAG38LTC38LD.....	C-86	YAG8CLTC12LD.....	C-84	YAK311A-2G1.....	H-79
YAG2CL-2TC516-LD.....	C-88	YAG38LTC516FX.....	C-57	YAG8CLTC14FX.....	C-56	YAK311A-2G2.....	H-79
YAG2CLTC10LD.....	C-84	YAG38LTC516LD.....	C-86	YAG8CLTC14LD.....	C-84	YAK31A-2G1.....	H-79
YAG2CLTC12FX.....	C-56	YAG38LTC58LD.....	C-86	YAG8CLTC38LD.....	C-84	YAK31A-2G2.....	H-79
YAG2CLTC12LD.....	C-84	YAG39L-2NTC-LD.....	C-90	YAG8CLTC516FX.....	C-56	YAK34A-2G1.....	H-79
YAG2CLTC14FX.....	C-56	YAG40L-2NNT-LD.....	C-90	YAG8CLTC516LD.....	C-84	YAK34A-2G2.....	H-79
YAG2CLTC14LD.....	C-84	YAG40L-2NTC-LD.....	C-90	YAGB25LTC12FX.....	C-216	YAK-361A-2G1.....	H-79
YAG2CLTC38FX.....	C-56	YAG40L-2TC38-LD.....	C-90	YAGB25LTC12FXOEM.....	C-216	YAK-361A-2G2.....	H-79
YAG2CLTC38LD.....	C-84	YAG40LTC12FX.....	C-57	YAGB25LTC14FX.....	C-216	YAK39A-2G1.....	H-79
YAG2CLTC516FX.....	C-56	YAG40LTC12LD.....	C-86	YAGB25LTC14FXOEM.....	C-216	YAK39A-2G2.....	H-79
YAG2CLTC516LD.....	C-84	YAG40LTC14FX.....	C-57	YAGB25LTC38FX.....	C-216	YAK44A-2NG7.....	H-79
YAG30L-2NTC-LD.....	C-89	YAG40LTC38FX.....	C-57	YAGB25LTC38FXOEM.....	C-216	YAK44A-2NG8.....	H-79
YAG30L-2TC12-LD.....	C-89	YAG40LTC38LD.....	C-86	YAGB25LTC516FX.....	C-216	YALB102M10.....	C-122
YAG30L-2TC38-LD.....	C-89	YAG40LTC516FX.....	C-57	YAGB25LTC516FXOEM.....	C-216	YALB102M12.....	C-122
YAG30LTC12FX.....	C-57	YAG40LTC516LD.....	C-86	YAGB26LTC12FX.....	C-216	YALB102M4.....	C-122
YAG30LTC34LD.....	C-85	YAG40LTC58LD.....	C-86	YAGB26LTC12FXOEM.....	C-216	YALB102M5.....	C-122
YAG30LTC38FX.....	C-57	YAG44L-2NTC-LD.....	C-90	YAGB26LTC14FX.....	C-216	YALB102M6.....	C-122
YAG30LTC58FX.....	C-57	YAG44L-2TC12E3-LD.....	C-90	YAGB26LTC14FXOEM.....	C-216	YALB102M8.....	C-122
YAG30LTC58LD.....	C-85	YAG44L-2TC12-LD.....	C-90	YAGB26LTC38FX.....	C-216	YALB10M10.....	C-116
YAG31L-2NTC38-LD.....	C-90	YAG44L-2TC38-LD.....	C-90	YAGB26LTC38FXOEM.....	C-216	YALB10M12.....	C-116
YAG31L-2NTC-LD.....	C-90	YAG44L-2TC58-LD.....	C-90	YAGB26LTC516FX.....	C-216	YALB10M4.....	C-116
YAG31L-2TC12-LD.....	C-90	YAG44LTC12FX.....	C-57	YAGB26LTC516FXOEM.....	C-216	YALB10M5.....	C-116
YAG31L-2TC38-LD.....	C-90	YAG44LTC12LD.....	C-86	YAGB28LTC12FX.....	C-216	YALB10M6.....	C-116
YAG31LNT12LD.....	C-85	YAG44LTC38FX.....	C-57	YAGB28LTC12FXOEM.....	C-216	YALB10M8.....	C-116
YAG31LTC12FX.....	C-57	YAG44LTC516FX.....	C-57	YAGB28LTC14FX.....	C-216	YALB120M10.....	C-123
YAG31LTC12LD.....	C-85	YAG44LTC58LD.....	C-86	YAGB28LTC14FXOEM.....	C-216	YALB120M12.....	C-123
YAG31LTC14FX.....	C-57	YAG4CL-2NT10E1-LD.....	C-88	YAGB28LTC38FX.....	C-216	YALB120M14.....	C-123
YAG31LTC14LD.....	C-85	YAG4CL-2NT10-LD.....	C-88	YAGB28LTC38FXOEM.....	C-216	YALB120M16.....	C-123
YAG31LTC34LD.....	C-85	YAG4CL-2NTC-LD.....	C-88	YAGB28LTC516FX.....	C-216	YALB120M20.....	C-123
YAG31LTC38FX.....	C-57	YAG4CL-2TC14E1-LD.....	C-88	YAGB28LTC516FXOEM.....	C-216	YALB120M2M.....	C-123
YAG31LTC38LD.....	C-85	YAG4CL-2TC14E2-LD.....	C-88	YAGB2CLTC10FX.....	C-216	YALB120F2M10.....	C-135
YAG31LTC516FX.....	C-57	YAG4CL-2TC14-LD.....	C-88	YAGB2CLTC10FXOEM.....	C-216	YALB120F2M12.....	C-135
YAG31LTC516LD.....	C-85	YAG4CL-2TC38-LD.....	C-88	YAGB2CLTC12FX.....	C-216	YALB120F2M14.....	C-135
YAG31LTC58FX.....	C-57	YAG4CL-2TC516-LD.....	C-88	YAGB2CLTC12FXOEM.....	C-216	YALB120F2M16.....	C-135
YAG31LTC58LD.....	C-85	YAG4CLNT10LD.....	C-84	YAGB2CLTC14FX.....	C-216	YALB120F2M20.....	C-135
YAG32L-2NTC-LD.....	C-90	YAG4CLTC10LD.....	C-84	YAGB2CLTC14FXOEM.....	C-216	YALB120F2M8.....	C-135
YAG32L-2TC38-LD.....	C-90	YAG4CLTC12FX.....	C-56	YAGB2CLTC38FX.....	C-216	YALB120FM10.....	C-129
YAG32LTC12FX.....	C-57	YAG4CLTC12LD.....	C-84	YAGB2CLTC38FXOEM.....	C-216	YALB120FM12.....	C-129
YAG32LTC12LD.....	C-85	YAG4CLTC14FX.....	C-56	YAGB2CLTC516FX.....	C-216	YALB120FM14.....	C-129
YAG32LTC38LD.....	C-85	YAG4CLTC14LD.....	C-84	YAGB2CLTC516FXOEM.....	C-216	YALB120FM16.....	C-129
YAG32LTC58FX.....	C-57	YAG4CLTC38FX.....	C-56	YAGB4CLTC10FX.....	C-216	YALB120FM20.....	C-129
YAG32LTC58LD.....	C-85	YAG4CLTC38LD.....	C-84	YAGB4CLTC10FXOEM.....	C-216	YALB120FM8.....	C-129
YAG34L-2NT38-LD.....	C-90	YAG4CLTC516FX.....	C-56	YAGB4CLTC12FX.....	C-216	YALB120M10.....	C-117
YAG34L-2NTC-LD.....	C-90	YAG4CLTC516LD.....	C-84	YAGB4CLTC12FXOEM.....	C-216	YALB120M12.....	C-117
YAG34L-2TC12-LD.....	C-90	YAG6CL-2NTC-LD.....	C-88	YAGB4CLTC14FX.....	C-216	YALB120M14.....	C-117
YAG34L-2TC38-LD.....	C-90	YAG6CL-2TC10E2-LD.....	C-88	YAGB4CLTC14FXOEM.....	C-216	YALB120M16.....	C-117
YAG34L-2TC516-LD.....	C-90	YAG6CL-2TC10E4-LD.....	C-88	YAGB4CLTC38FX.....	C-216	YALB120M20.....	C-117
YAG34LNT516N66LD.....	C-86	YAG6CL-2TC10E-LD.....	C-88	YAGB4CLTC38FXOEM.....	C-216	YALB120M8.....	C-117
YAG34LTC12FX.....	C-57	YAG6CL-2TC10-LD.....	C-88	YAGB4CLTC516FX.....	C-216	YALB1502M10.....	C-123
YAG34LTC12LD.....	C-86	YAG6CL-2TC14E1-LD.....	C-88	YAGB4CLTC516FXOEM.....	C-216	YALB1502M12.....	C-123
YAG34LTC38FX.....	C-57	YAG6CL-2TC14E2-LD.....	C-88	YAGB6CLTC10FX.....	C-216	YALB1502M14.....	C-123
YAG34LTC38LD.....	C-86	YAG6CL-2TC14-LD.....	C-88	YAGB6CLTC10FXOEM.....	C-216	YALB1502M16.....	C-123
YAG34LTC516FX.....	C-57	YAG6CL-2TC38-LD.....	C-88	YAGB6CLTC12FX.....	C-216	YALB1502M20.....	C-123
YAG34LTC516LD.....	C-86	YAG6CL-2TC516-LD.....	C-88	YAGB6CLTC12FXOEM.....	C-216	YALB1502M8.....	C-123
YAG34LTC516N66LD.....	C-86	YAG6CLTC10LD.....	C-84	YAGB6CLTC14FX.....	C-216	YALB150F2M10.....	C-135
YAG34LTC58FX.....	C-57	YAG6CLTC12FX.....	C-56	YAGB6CLTC14FXOEM.....	C-216	YALB150F2M12.....	C-135
YAG34LTC58LD.....	C-86	YAG6CLTC12LD.....	C-84	YAGB6CLTC38FX.....	C-216	YALB150F2M14.....	C-135
YAG36L-2NTC-LD.....	C-90	YAG6CLTC14FX.....	C-56	YAGB6CLTC38FXOEM.....	C-216	YALB150F2M16.....	C-135
YAG36L-2TC38-LD.....	C-90	YAG6CLTC14LD.....	C-84	YAGB6CLTC516FX.....	C-216	YALB150F2M20.....	C-135
YAG36LTC12LD.....	C-86	YAG6CLTC38FX.....	C-56	YAGB6CLTC516FXOEM.....	C-216	YALB150F2M8.....	C-135
YAG36LTC38FX.....	C-57	YAG6CLTC38LD.....	C-84	YAIT1210Y.....	B-75	YALB150FM10.....	C-129
YAG36LTC58LD.....	C-86	YAG6CLTC516FX.....	C-56	YAIT1814B.....	B-75	YALB150FM12.....	C-129
YAG38L-2NT38-LD.....	C-90	YAG6CLTC516LD.....	C-84	YAIT2218R.....	B-75	YALB150FM14.....	C-129
YAG38L-2NTC-LD.....	C-90	YAG8CL-2TC10-LD.....	C-88	YAK25A-2G1.....	H-79	YALB150FM16.....	C-129
YAG38L-2TC12-LD.....	C-90	YAG8CL-2TC14E1-LD.....	C-88	YAK25A-2G2.....	H-79	YALB150FM20.....	C-129
YAG38L-2TC38-LD.....	C-90	YAG8CL-2TC14E2-LD.....	C-88	YAK28A-2G1.....	H-79	YALB150FM8.....	C-129
YAG38L-2TC516-LD.....	C-90	YAG8CL-2TC14-LD.....	C-88	YAK28A-2G2.....	H-79	YALB150M10.....	C-117

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YALB150M12	C-117	YALB25M8	C-116	YALB50F2M8	C-135	YALB95M16	C-116
YALB150M14	C-117	YALB3002M10	C-124	YALB50FM10	C-129	YALB95M20	C-116
YALB150M16	C-117	YALB3002M12	C-124	YALB50FM12	C-129	YALB95M8	C-116
YALB150M20	C-117	YALB3002M14	C-124	YALB50FM14	C-129	YASG6CL-2TC14E2-FX	C-99
YALB150M8	C-117	YALB3002M16	C-124	YALB50FM16	C-129	YASV6CL-2TC14E2-FX	C-99
YALB162M10	C-122	YALB3002M20	C-124	YALB50FM6	C-129	YASV6CL-2TC14E2-FX-60	C-99
YALB162M12	C-122	YALB300F2M10	C-136	YALB50FM8	C-129	YATW10HS	B-77
YALB162M4	C-122	YALB300F2M12	C-136	YALB50M10	C-116	YATW10N	B-76
YALB162M5	C-122	YALB300F2M14	C-136	YALB50M12	C-116	YATW10NG	B-77
YALB162M6	C-122	YALB300F2M16	C-136	YALB50M14	C-116	YATW10P	B-76
YALB162M8	C-122	YALB300F2M20	C-136	YALB50M16	C-116	YATW14HS	B-77
YALB16M10	C-116	YALB300FM10	C-130	YALB50M6	C-116	YATW14N	B-76
YALB16M12	C-116	YALB300FM12	C-130	YALB50M8	C-116	YATW14NG	B-77
YALB16M4	C-116	YALB300FM14	C-130	YALB6302M12	C-124	YATW14P	B-76
YALB16M5	C-116	YALB300FM16	C-130	YALB6302M16	C-124	YATW18HS	B-77
YALB16M6	C-116	YALB300FM20	C-130	YALB6302M20	C-124	YATW18N	B-76
YALB16M8	C-116	YALB300M10	C-117	YALB630F2M12	C-136	YATW18NG	B-77
YALB1852M10	C-123	YALB300M12	C-117	YALB630F2M16	C-136	YATW18P	B-76
YALB1852M12	C-123	YALB300M14	C-117	YALB630F2M20	C-136	YAV0252M3	C-119
YALB1852M14	C-123	YALB300M16	C-117	YALB630FM12	C-130	YAV0252M4	C-119
YALB1852M16	C-123	YALB300M20	C-117	YALB630FM16	C-130	YAV0252M5	C-119
YALB1852M20	C-123	YALB352M10	C-122	YALB630FM20	C-130	YAV0252M6	C-119
YALB1852M8	C-123	YALB352M12	C-122	YALB630M12	C-117	YAV0252M8	C-119
YALB185F2M10	C-136	YALB352M5	C-122	YALB630M16	C-117	YAV025M3	C-112
YALB185F2M12	C-136	YALB352M6	C-122	YALB630M20	C-117	YAV025M4	C-112
YALB185F2M14	C-136	YALB352M8	C-122	YALB702M10	C-123	YAV025M5	C-112
YALB185F2M16	C-136	YALB35M10	C-116	YALB702M12	C-123	YAV025M6	C-112
YALB185F2M20	C-136	YALB35M12	C-116	YALB702M14	C-123	YAV025M8	C-112
YALB185F2M8	C-136	YALB35M5	C-116	YALB702M16	C-123	YAV062M10	C-119
YALB185FM10	C-130	YALB35M6	C-116	YALB702M6	C-123	YAV062M4	C-119
YALB185FM12	C-130	YALB35M8	C-116	YALB702M8	C-123	YAV062M5	C-119
YALB185FM14	C-130	YALB4002M12	C-124	YALB70F2M10	C-135	YAV062M6	C-119
YALB185FM16	C-130	YALB4002M14	C-124	YALB70F2M12	C-135	YAV062M8	C-119
YALB185FM20	C-130	YALB4002M16	C-124	YALB70F2M14	C-135	YAV06M10	C-112
YALB185FM8	C-130	YALB4002M20	C-124	YALB70F2M16	C-135	YAV06M35	C-112
YALB185M10	C-117	YALB400F2M12	C-136	YALB70F2M6	C-135	YAV06M4	C-112
YALB185M12	C-117	YALB400F2M14	C-136	YALB70F2M8	C-135	YAV06M5	C-112
YALB185M14	C-117	YALB400F2M16	C-136	YALB70FM10	C-129	YAV06M6	C-112
YALB185M16	C-117	YALB400F2M20	C-136	YALB70FM12	C-129	YAV06M8	C-112
YALB185M20	C-117	YALB400FM12	C-130	YALB70FM14	C-129	YAV10	B-15
YALB185M8	C-117	YALB400FM14	C-130	YALB70FM16	C-129	YAV102M10	C-119
YALB2402M10	C-124	YALB400FM16	C-130	YALB70FM6	C-129	YAV102M12	C-119
YALB2402M12	C-124	YALB400FM20	C-130	YALB70FM8	C-129	YAV102M4	C-119
YALB2402M14	C-124	YALB400M12	C-117	YALB70M10	C-116	YAV102M5	C-119
YALB2402M16	C-124	YALB400M14	C-117	YALB70M12	C-116	YAV102M6	C-119
YALB2402M20	C-124	YALB400M16	C-117	YALB70M14	C-116	YAV102M8	C-119
YALB240F2M10	C-136	YALB400M20	C-117	YALB70M16	C-116	YAV10-2TC10	C-28
YALB240F2M12	C-136	YALB5002M12	C-124	YALB70M6	C-116	YAV102TC1090SL	C-104
YALB240F2M14	C-136	YALB5002M16	C-124	YALB70M8	C-116	YAV10-2TC14	C-28
YALB240F2M16	C-136	YALB5002M20	C-124	YALB952M10	C-123	YAV10-2TC14E1	C-28
YALB240F2M20	C-136	YALB500F2M12	C-136	YALB952M12	C-123	YAV10-2TC14E2	C-28
YALB240FM10	C-130	YALB500F2M16	C-136	YALB952M14	C-123	YAV10-2TC38	C-28
YALB240FM12	C-130	YALB500F2M20	C-136	YALB952M16	C-123	YAV10BBOX	B-15, C-12
YALB240FM14	C-130	YALB500FM12	C-130	YALB952M20	C-123	YAV10H	B-18
YALB240FM16	C-130	YALB500FM16	C-130	YALB952M8	C-123	YAV10H25	B-18
YALB240FM20	C-130	YALB500FM20	C-130	YALB95F2M10	C-135	YAV10-H25BOX	B-18
YALB240M10	C-117	YALB500M12	C-117	YALB95F2M12	C-135	YAV10H3	B-18
YALB240M12	C-117	YALB500M16	C-117	YALB95F2M14	C-135	YAV10-H3BOX	B-18
YALB240M14	C-117	YALB500M20	C-117	YALB95F2M16	C-135	YAV10-HBOX	B-18
YALB240M16	C-117	YALB502M10	C-122	YALB95F2M20	C-135	YAV10-HF	B-45
YALB240M20	C-117	YALB502M12	C-122	YALB95F2M8	C-135	YAV10-HFBOX	B-45
YALB252M10	C-122	YALB502M14	C-122	YALB95FM10	C-129	YAV10L36	B-15
YALB252M12	C-122	YALB502M16	C-122	YALB95FM12	C-129	YAV10-L36BOX	B-15
YALB252M5	C-122	YALB502M6	C-122	YALB95FM14	C-129	YAV10M10	C-112
YALB252M6	C-122	YALB502M8	C-122	YALB95FM16	C-129	YAV10M12	C-112
YALB252M8	C-122	YALB50F2M10	C-135	YALB95FM20	C-129	YAV10M4	C-112
YALB25M10	C-116	YALB50F2M12	C-135	YALB95FM8	C-129	YAV10M5	C-112
YALB25M12	C-116	YALB50F2M14	C-135	YALB95M10	C-116	YAV10M6	C-112
YALB25M5	C-116	YALB50F2M16	C-135	YALB95M12	C-116	YAV10M8	C-112
YALB25M6	C-116	YALB50F2M6	C-135	YALB95M14	C-116	YAV10-R	B-23

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YAV10-R3BOX.....	B-23, C-12	YAV14-T2BOX.....	B-15	YAV185M14.....	C-113	YAV240M16.....	C-113
YAV10R-BOX.....	C-12	YAV14T3.....	B-15	YAV185M16.....	C-113	YAV240M20.....	C-113
YAV10T11.....	B-15	YAV14T32F.....	B-44	YAV185M20.....	C-113	YAV252M10.....	C-119
YAV10-T11BOX.....	B-15	YAV14-T32FBOX.....	B-44	YAV185M8.....	C-113	YAV252M12.....	C-119
YAV10T2.....	B-15	YAV14T34F.....	B-44	YAV18BOX.....	B-15	YAV252M5.....	C-119
YAV10T21F.....	B-44	YAV14-T34FBOX.....	B-44	YAV18H.....	B-18	YAV252M6.....	C-119
YAV10-T21FBOX.....	B-44	YAV14-T3BOX.....	B-15	YAV18-H19F.....	B-45	YAV252M8.....	C-119
YAV10T23F.....	B-44	YAV14T5.....	B-15	YAV18-H19FBOX.....	B-45	YAV252TC14E2-FXB.....	C-78
YAV10-T23FBOX.....	B-44	YAV14-T5BOX.....	B-15	YAV18-H21F.....	B-45	YAV252TC14-FXB.....	C-78
YAV10-T2BOX.....	B-15, C-12	YAV14-Z5.....	B-45	YAV18-H21FBOX.....	B-45	YAV252TC38-FXB.....	C-78
YAV10T3.....	B-15	YAV14-Z5BOX.....	B-45	YAV18-H6F.....	B-45	YAV25-L.....	B-17
YAV10-T3BOX.....	B-15, C-12	YAV14-Z6.....	B-45	YAV18-H6FBOX.....	B-45	YAV25-L1.....	B-17
YAV10T4.....	B-15	YAV14-Z6BOX.....	B-45	YAV18-HBOX.....	B-18	YAV25-L1BOX.....	B-17
YAV10-T4BOX.....	B-15, C-12	YAV1502M10.....	C-120	YAV18L33.....	B-15	YAV25-L2.....	B-17
YAV10T7.....	B-15	YAV1502M12.....	C-120	YAV18-R.....	B-23	YAV25-L2BOX.....	B-17
YAV10-T7BOX.....	B-15	YAV1502M14.....	C-120	YAV18T1.....	B-15	YAV25-L2BOX.....	B-17
YAV1202M10.....	C-120	YAV1502M16.....	C-120	YAV18T19F.....	B-44	YAV25-L2TC14E1FX.....	C-71
YAV1202M12.....	C-120	YAV1502M20.....	C-120	YAV18-T19FBOX.....	B-44	YAV25L2NT14FX.....	C-71
YAV1202M14.....	C-120	YAV1502M8.....	C-120	YAV18-T1BOX.....	B-15	YAV25-L2NTC-FX.....	C-67
YAV1202M16.....	C-120	YAV150F2M10.....	C-132	YAV18T21F.....	B-44	YAV25-L2TC12E1-FX.....	C-67
YAV1202M20.....	C-120	YAV150F2M12.....	C-132	YAV18-T21FBOX.....	B-44	YAV25-L2TC14E2-FX.....	C-67
YAV1202M8.....	C-120	YAV150F2M14.....	C-132	YAV18T4.....	B-15	YAV25-L2TC14-FX.....	C-67
YAV120F2M10.....	C-132	YAV150F2M16.....	C-132	YAV18-T4BOX.....	B-15	YAV25-L2TC38-FX.....	C-67
YAV120F2M12.....	C-132	YAV150F2M20.....	C-132	YAV18T5.....	B-15	YAV25-L2TC516E2-FX.....	C-67
YAV120F2M14.....	C-132	YAV150F2M8.....	C-132	YAV18-T5BOX.....	B-15	YAV25-L2TC516-FX.....	C-67
YAV120F2M16.....	C-132	YAV150FM10.....	C-126	YAV1C2N-FXB.....	C-78	YAV25-L3.....	B-17
YAV120F2M20.....	C-132	YAV150FM12.....	C-126	YAV1C2TC38-FXB.....	C-78	YAV25-L3BOX.....	B-17
YAV120F2M8.....	C-132	YAV150FM14.....	C-126	YAV1C-L.....	B-17	YAV25-L4.....	B-17
YAV120FM10.....	C-126	YAV150FM16.....	C-126	YAV1C-L1.....	B-17	YAV25-L4BOX.....	B-17
YAV120FM12.....	C-126	YAV150FM20.....	C-126	YAV1C-L1BOX.....	B-17	YAV25L4TC14FXG1.....	C-106
YAV120FM14.....	C-126	YAV150FM8.....	C-126	YAV1C-L2.....	B-17	YAV25-LBOX.....	B-17
YAV120FM16.....	C-126	YAV150M10.....	C-113	YAV1C-L2BOX.....	B-17	YAV25LNT14FX.....	C-53
YAV120FM20.....	C-126	YAV150M12.....	C-113	YAV1CL2NT14FX.....	C-71	YAV25LNT38FX.....	C-53
YAV120FM8.....	C-126	YAV150M14.....	C-113	YAV1CL2NT516FX.....	C-71	YAV25LNT516FX.....	C-53
YAV120M10.....	C-113	YAV150M16.....	C-113	YAV1C-L2NTC-FX.....	C-67	YAV25LTC12-FX.....	C-49
YAV120M12.....	C-113	YAV150M20.....	C-113	YAV1C-L2TC14E1-FX.....	C-67	YAV25LTC14-FX.....	C-49
YAV120M14.....	C-113	YAV150M8.....	C-113	YAV1C-L2TC14E2-FX.....	C-67	YAV25LTC38-FX.....	C-49
YAV120M16.....	C-113	YAV162M10.....	C-119	YAV1C-L2TC14-FX.....	C-67	YAV25LTC516-FX.....	C-49
YAV120M20.....	C-113	YAV162M12.....	C-119	YAV1C-L2TC38-FX.....	C-67	YAV25M10.....	C-112
YAV120M6.....	C-113	YAV162M4.....	C-119	YAV1C-L2TC516-FX.....	C-67	YAV25M12.....	C-112
YAV120M8.....	C-113	YAV162M5.....	C-119	YAV1C-L3.....	B-17	YAV25M15.....	C-112
YAV12G2.....	B-15	YAV162M6.....	C-119	YAV1C-L3BOX.....	B-17	YAV25M6.....	C-112
YAV12-G2BOX.....	B-15	YAV162M8.....	C-119	YAV1C-LBOX.....	B-17	YAV25M8.....	C-112
YAV12G3.....	B-15	YAV16M10.....	C-112	YAV1CL-TC10-FX.....	C-49	YAV25-RS.....	B-23
YAV12-G3BOX.....	B-15	YAV16M12.....	C-112	YAV1CL-TC12-FX.....	C-49	YAV25-RS3.....	B-23
YAV14.....	B-15	YAV16M4.....	C-112	YAV1CL-TC14-FX.....	C-49	YAV25-TC10-FXB.....	C-64
YAV14BOX.....	B-15	YAV16M5.....	C-112	YAV1CL-TC38-FX.....	C-49	YAV25-TC12-FXB.....	C-64
YAV14H.....	B-18	YAV16M6.....	C-112	YAV1CL-TC516-FX.....	C-49	YAV25-TC38-FXB.....	C-64
YAV14H1.....	B-18	YAV16M8.....	C-112	YAV1C-RS1.....	B-23	YAV25-TC516-FXB.....	C-64
YAV14-H1BOX.....	B-18	YAV18.....	B-15	YAV1C-RS2.....	B-23	YAV262N-FXB.....	C-78
YAV14H2.....	B-18	YAV1852M10.....	C-120	YAV1C-TC10-FXB.....	C-64	YAV262NTC38-FXB.....	C-78
YAV14-H2BOX.....	B-18	YAV1852M12.....	C-120	YAV1C-TC516-FXB.....	C-64	YAV262TC14E2-FXB.....	C-78
YAV14-H32F.....	B-45	YAV1852M14.....	C-120	YAV2402M10.....	C-120	YAV262TC14-FXB.....	C-78
YAV14-H32FBOX.....	B-45	YAV1852M16.....	C-120	YAV2402M12.....	C-120	YAV262TC38-FXB.....	C-78
YAV14-H34F.....	B-45	YAV1852M20.....	C-120	YAV2402M14.....	C-120	YAV26-L.....	B-17
YAV14-H34FBOX.....	B-45	YAV1852M8.....	C-120	YAV2402M16.....	C-120	YAV26-L1.....	B-17
YAV14-H56F.....	B-45	YAV185F2M10.....	C-132	YAV2402M20.....	C-120	YAV26-L2.....	B-17
YAV14-H56FBOX.....	B-45	YAV185F2M12.....	C-132	YAV240F2M10.....	C-133	YAV26-L12BOX.....	B-17
YAV14-HBOX.....	B-18	YAV185F2M14.....	C-132	YAV240F2M12.....	C-133	YAV26-L1BOX.....	B-17
YAV14-HF.....	B-45	YAV185F2M16.....	C-132	YAV240F2M14.....	C-133	YAV26-L2.....	B-17
YAV14-HFBOX.....	B-45	YAV185F2M20.....	C-132	YAV240F2M16.....	C-133	YAV26-L2BOX.....	B-17
YAV14L33.....	B-15	YAV185F2M8.....	C-132	YAV240F2M20.....	C-133	YAV26L2NT14FX.....	C-71
YAV14-L33BOX.....	B-15	YAV185FM10.....	C-127	YAV240FM10.....	C-127	YAV26L2NT38FX.....	C-71
YAV14L36.....	B-15	YAV185FM12.....	C-127	YAV240FM12.....	C-127	YAV26L2NT516FX.....	C-71
YAV14-L36BOX.....	B-15	YAV185FM14.....	C-127	YAV240FM14.....	C-127	YAV26-L2NTC-FX.....	C-68
YAV14-R.....	B-23	YAV185FM16.....	C-127	YAV240FM16.....	C-127	YAV26-L2TC12E1-FX.....	C-68
YAV14-RL33.....	B-23	YAV185FM20.....	C-127	YAV240FM20.....	C-127	YAV26-L2TC14E2-FX.....	C-68
YAV14T1.....	B-15	YAV185FM8.....	C-127	YAV240M10.....	C-113	YAV26-L2TC14-FX.....	C-68
YAV14-T1BOX.....	B-15	YAV185M10.....	C-113	YAV240M12.....	C-113	YAV26L2TC38E10FX.....	C-68
YAV14T2.....	B-15	YAV185M12.....	C-113	YAV240M14.....	C-113	YAV26-L2TC38-FX.....	C-68

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YAV26-L2TC516-FX.....	C-68	YAV28L-TC14-FX.....	C-50	YAV300F2M10.....	C-133	YAV4CL-TC12-FX.....	C-49
YAV26-L3.....	B-17	YAV28L-TC34-FX.....	C-50	YAV300F2M12.....	C-133	YAV4CL-TC14-FX.....	C-49
YAV26-L3BOX.....	B-17	YAV28L-TC38-FX.....	C-50	YAV300F2M14.....	C-133	YAV4CL-TC38-FX.....	C-49
YAV26L4TC14FXG1.....	C-106	YAV28L-TC516-FX.....	C-50	YAV300F2M16.....	C-133	YAV4CL-TC516-FX.....	C-49
YAV26-LBOX.....	B-17	YAV28L-TC58-FX.....	C-50	YAV300F2M20.....	C-133	YAV4C-RS.....	B-23
YAV26LNT12FX.....	C-53	YAV28-RS.....	B-23	YAV300FM10.....	C-127	YAV4C-RS2.....	B-23
YAV26LNT38FX.....	C-53	YAV28-TC12-FXB.....	C-65	YAV300FM12.....	C-127	YAV4C-RS3.....	B-23
YAV26LNT516FX.....	C-53	YAV28-TC38-FXB.....	C-65	YAV300FM14.....	C-127	YAV4C-RS4.....	B-23
YAV26L-TC10-FX.....	C-49	YAV292N-FXB.....	C-79	YAV300FM16.....	C-127	YAV4C-TC10-FXB.....	C-64
YAV26L-TC12-FX.....	C-49	YAV292NT38-FXB.....	C-79	YAV300FM20.....	C-127	YAV4C-TC14-FXB.....	C-64
YAV26L-TC14-FX.....	C-49	YAV292NTC38-FXB.....	C-79	YAV300M10.....	C-113	YAV4C-TC516-FXB.....	C-64
YAV26L-TC34-FX.....	C-49	YAV292TC14E2-FXB.....	C-79	YAV300M12.....	C-113	YAV5002M16.....	C-120
YAV26L-TC38-FX.....	C-49	YAV292TC38-FXB.....	C-79	YAV300M14.....	C-113	YAV5002M20.....	C-120
YAV26L-TC516-FX.....	C-49	YAV29L2NT38FX.....	C-71	YAV300M16.....	C-113	YAV500F2M12.....	C-133
YAV26L-TC58-FX.....	C-49	YAV29-L2NTC-FX.....	C-68	YAV300M20.....	C-113	YAV500F2M16.....	C-133
YAV26-RS.....	B-23	YAV29L2TC12E1FX.....	C-68	YAV352M10.....	C-119	YAV500F2M20.....	C-133
YAV26-RS3.....	B-23	YAV29-L2TC12-FX.....	C-68	YAV352M12.....	C-119	YAV500FM12.....	C-127
YAV26-TC12-FXB.....	C-64	YAV29-L2TC14E2-FX.....	C-68	YAV352M5.....	C-119	YAV500FM16.....	C-127
YAV26-TC38-FXB.....	C-64	YAV29-L2TC14-FX.....	C-68	YAV352M6.....	C-119	YAV500FM20.....	C-127
YAV272N-FXB.....	C-79	YAV29-L2TC38-FX.....	C-68	YAV352M8.....	C-119	YAV500M12.....	C-114
YAV272TC14E2-FXB.....	C-79	YAV29-L2TC516-FX.....	C-68	YAV35M10.....	C-112	YAV500M16.....	C-114
YAV272TC38-FXB.....	C-79	YAV29L-TC12-FX.....	C-50	YAV35M12.....	C-112	YAV500M20.....	C-114
YAV27-L.....	B-17	YAV29L-TC14-FX.....	C-50	YAV35M16.....	C-112	YAV502M10.....	C-119
YAV27-L1.....	B-17	YAV29L-TC34-FX.....	C-50	YAV35M5.....	C-112	YAV502M12.....	C-119
YAV27-L15.....	B-17	YAV29L-TC38-FX.....	C-50	YAV35M6.....	C-112	YAV502M14.....	C-119
YAV27-L15BOX.....	B-17	YAV29L-TC516-FX.....	C-50	YAV35M8.....	C-112	YAV502M16.....	C-119
YAV27-L1BOX.....	B-17	YAV29L-TC58-FX.....	C-50	YAV3C2NFXB.....	C-78	YAV502M6.....	C-119
YAV27L2NTCFX.....	C-68	YAV2C2N-FXB.....	C-78	YAV4002M14.....	C-120	YAV502M8.....	C-119
YAV27-L2TC14-FX.....	C-68	YAV2C2TC14E1-FXB.....	C-78	YAV4002M16.....	C-120	YAV50F2M10.....	C-132
YAV27-L2TC38-FX.....	C-68	YAV2C2TC14E2-FXB.....	C-78	YAV4002M20.....	C-120	YAV50F2M12.....	C-132
YAV27L4TC14FXG1.....	C-106	YAV2C2TC14-FXB.....	C-78	YAV400F2M12.....	C-133	YAV50F2M14.....	C-132
YAV27-LBOX.....	B-17	YAV2C2TC38-FXB.....	C-78	YAV400F2M14.....	C-133	YAV50F2M16.....	C-132
YAV27LNT12FX.....	C-53	YAV2C2TC516-FXB.....	C-78	YAV400F2M16.....	C-133	YAV50F2M6.....	C-132
YAV27L-TC10-FX.....	C-50	YAV2C-L.....	B-16	YAV400F2M20.....	C-133	YAV50F2M8.....	C-132
YAV27L-TC12-FX.....	C-50	YAV2C-L1.....	B-16	YAV400FM12.....	C-127	YAV50FM10.....	C-126
YAV27L-TC14-FX.....	C-50	YAV2C-L1BOX.....	B-16	YAV400FM14.....	C-127	YAV50FM12.....	C-126
YAV27L-TC38-FX.....	C-50	YAV2C-L2.....	B-16	YAV400FM16.....	C-127	YAV50FM14.....	C-126
YAV27L-TC516-FX.....	C-50	YAV2C-L2BOX.....	B-16	YAV400FM20.....	C-127	YAV50FM16.....	C-126
YAV27-RS.....	B-23	YAV2CL2NT10FX.....	C-71	YAV400M12.....	C-114	YAV50FM6.....	C-126
YAV27-TC12-FXB.....	C-64	YAV2CL2NT14E1FX.....	C-71	YAV400M14.....	C-114	YAV50FM8.....	C-126
YAV282N-FXB.....	C-79	YAV2CL2NT14FX.....	C-71	YAV400M16.....	C-114	YAV50M10.....	C-112
YAV282NT38-FXB.....	C-79	YAV2C-L2NTC-FX.....	C-67	YAV400M20.....	C-114	YAV50M12.....	C-112
YAV282NTC38-FXB.....	C-79	YAV2C-L2TC14E1-FX.....	C-67	YAV4C2N-FXB.....	C-78	YAV50M14.....	C-112
YAV282TC14E2-FXB.....	C-79	YAV2C-L2TC14E2-FX.....	C-67	YAV4C2TC14E2-FXB.....	C-78	YAV50M16.....	C-112
YAV282TC38-FXB.....	C-79	YAV2C-L2TC14-FX.....	C-67	YAV4C2TC14-FXB.....	C-78	YAV50M5.....	C-112
YAV28-L.....	B-17	YAV2CL2TC14FXSL.....	C-100	YAV4C2TC38-FXB.....	C-78	YAV50M6.....	C-112
YAV28-L12.....	B-17	YAV2C-L2TC38-FX.....	C-67	YAV4C2TC516-FXB.....	C-78	YAV50M8.....	C-112
YAV28-L12BOX.....	B-17	YAV2CL2TC38FXSL.....	C-100	YAV4C-L.....	B-16	YAV6302M16.....	C-120
YAV28-L13.....	B-17	YAV2C-L2TC516-FX.....	C-67	YAV4C-L2.....	B-16	YAV6302M20.....	C-120
YAV28-L13BOX.....	B-17	YAV2C-L4.....	B-16	YAV4C-L2BOX.....	B-16	YAV630F2M12.....	C-133
YAV28-L14.....	B-17	YAV2C-L4BOX.....	B-16	YAV4CL2NT10E1FX.....	C-71	YAV630F2M16.....	C-133
YAV28-L14BOX.....	B-17	YAV2CL4TC14FXG1.....	C-106	YAV4CL2NT10FX.....	C-71	YAV630F2M20.....	C-133
YAV28L2ENT14FX.....	C-71	YAV2C-LBOX.....	B-16	YAV4CL2NT14FX.....	C-71	YAV630FM12.....	C-127
YAV28L2NT38FX.....	C-71	YAV2CLNT14FX.....	C-53	YAV4C-L2NTC-FX.....	C-67	YAV630FM16.....	C-127
YAV28-L2NTC-FX.....	C-68	YAV2CLNT516FX.....	C-53	YAV4C-L2TC14E1-FX.....	C-67	YAV630FM20.....	C-127
YAV28L2TC12E1FX.....	C-68	YAV2CL-TC10-FX.....	C-49	YAV4C-L2TC14E2-FX.....	C-67	YAV630M12.....	C-114
YAV28-L2TC12-FX.....	C-68	YAV2CL-TC12-FX.....	C-49	YAV4C-L2TC14-FX.....	C-67	YAV630M16.....	C-114
YAV28-L2TC14E2-FX.....	C-68	YAV2CL-TC14-FX.....	C-49	YAV4CL2TC14FXSL.....	C-100	YAV630M20.....	C-114
YAV28-L2TC14-FX.....	C-68	YAV2CL-TC38-FX.....	C-49	YAV4C-L2TC38-FX.....	C-67	YAV6C2N-FXB.....	C-78
YAV28-L2TC38-FX.....	C-68	YAV2CL-TC516-FX.....	C-49	YAV4CL2TC38FXSL.....	C-100	YAV6C2TC14E2-FXB.....	C-78
YAV28-L2TC516-FX.....	C-68	YAV2C-RS.....	B-23	YAV4C-L2TC516-FX.....	C-67	YAV6C2TC14-FXB.....	C-78
YAV28L4TC14FXG1.....	C-106	YAV2C-RS1.....	B-23	YAV4C-L3.....	B-16	YAV6C2TC38-FXB.....	C-78
YAV28L4TCG1.....	C-106	YAV2C-RS2.....	B-23	YAV4C-L3BOX.....	B-16	YAV6C-L.....	B-16
YAV28-L53.....	B-17	YAV2C-TC10-FXB.....	C-64	YAV4C-L4.....	B-16	YAV6C-L1.....	B-16
YAV28-L53BOX.....	B-17	YAV2C-TC516-FXB.....	C-64	YAV4C-L4BOX.....	B-16	YAV6C-L10.....	B-16
YAV28-LBOX.....	B-17	YAV3002M10.....	C-120	YAV4C-L5.....	B-16	YAV6C-L10BOX.....	B-16
YAV28LNT12FX.....	C-53	YAV3002M12.....	C-120	YAV4C-L5BOX.....	B-16	YAV6C-L1BOX.....	B-16
YAV28LNT38FX.....	C-53	YAV3002M14.....	C-120	YAV4C-LBOX.....	B-16	YAV6C-L2.....	B-16
YAV28LNT516FX.....	C-53	YAV3002M16.....	C-120	YAV4CLNT10FX.....	C-53	YAV6C-L2BOX.....	B-16
YAV28L-TC12-FX.....	C-50	YAV3002M20.....	C-120	YAV4CL-TC10-FX.....	C-49	YAV6C-L2NTC-FX.....	C-67

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YAV6C-L2TC10E2-FX.....	C-67	YAV95F2M12.....	C-132	YAZ29-2TC38.....	C-44	YAZ382NTCFX.....	C-76
YAV6C-L2TC10E4-FX.....	C-67	YAV95F2M14.....	C-132	YAZ294TCG1.....	C-107	YAZ382TC38FX.....	C-76
YAV6C-L2TC10E9-FX.....	C-67	YAV95F2M16.....	C-132	YAZ29TC12.....	C-25	YAZ38NT12FX.....	C-62
YAV6C-L2TC10-FX.....	C-67	YAV95F2M20.....	C-132	YAZ29TC38.....	C-25	YAZ38NT38FX.....	C-62
YAV6CL2TC10FX90SL.....	C-100	YAV95F2M8.....	C-132	YAZ2C-2N.....	C-43	YAZ38TC12.....	C-26
YAV6C-L2TC14E1-FX.....	C-67	YAV95FM10.....	C-126	YAZ2C-2NTC38.....	C-43	YAZ38TC12FX.....	C-62
YAV6C-L2TC14E2-FX.....	C-67	YAV95FM12.....	C-126	YAZ2C-2TC10E2.....	C-43	YAZ38TC38FX.....	C-62
YAV6C-L2TC14-FX.....	C-67	YAV95FM14.....	C-126	YAZ2C-2TC14.....	C-43	YAZ39-2N.....	C-44
YAV6C-L2TC38-FX.....	C-67	YAV95FM16.....	C-126	YAZ2C-2TC14E1.....	C-43	YAZ39-2NNT.....	C-44
YAV6C-L2TC516-FX.....	C-67	YAV95FM20.....	C-126	YAZ2C-2TC14E2.....	C-43	YAZ39-2NT38.....	C-44
YAV6C-L4.....	B-16	YAV95FM8.....	C-126	YAZ2C-2TC38.....	C-43	YAZ39-2TC38.....	C-44
YAV6C-L4BOX.....	B-16	YAV95M10.....	C-113	YAZ2C-2TC38E2.....	C-43	YAZ39NT12.....	C-26
YAV6C-LBOX.....	B-16	YAV95M12.....	C-113	YAZ2C-2TC38E6.....	C-43	YAZ39TC12.....	C-26
YAV6CL-TC10-FX.....	C-49	YAV95M14.....	C-113	YAZ2C2TC38SL.....	C-102	YAZ39TC38.....	C-26
YAV6CL-TC12-FX.....	C-49	YAV95M16.....	C-113	YAZ2C2TC38SLBOX500.....	C-102	YAZ3C-2N.....	C-43
YAV6CL-TC14-FX.....	C-49	YAV95M20.....	C-113	YAZ2C-2TC516E2.....	C-43	YAZ3C-2TC14.....	C-43
YAV6CL-TC34-FX.....	C-49	YAV95M6.....	C-113	YAZ2C2TC516E7.....	C-43	YAZ3C-2TC14E2.....	C-43
YAV6CL-TC38-FX.....	C-49	YAV95M8.....	C-113	YAZ2CTC12.....	C-24	YAZ3C-2TC38.....	C-43
YAV6CL-TC516-FX.....	C-49	YAV9CL36.....	B-15	YAZ2CTC14.....	C-24	YAZ3C-2TC38E2.....	C-43
YAV6C-RS.....	B-23	YAV9C-L36BOX.....	B-15	YAZ2CTC38.....	C-24	YAZ3C2TC38SL.....	C-102
YAV6C-RS1.....	B-23	YAV9CT4.....	B-15	YAZ30-2N.....	C-44	YAZ3C2TC38SLBOX500.....	C-102
YAV6C-RS2.....	B-23	YAV9C-T4BOX.....	B-15	YAZ30-2TC38.....	C-44	YAZ3CTC12.....	C-24
YAV6C-RS4.....	B-23	YAV9CT9.....	B-15	YAZ302TC38FX.....	C-75	YAZ3CTC14.....	C-24
YAV6C-TC10-FXB.....	C-64	YAV9C-T9BOX.....	B-15	YAZ30TC12.....	C-25	YAZ3CTC38.....	C-24
YAV6C-TC14-FXB.....	C-64	YAZ1C-2N.....	C-43	YAZ30TC38.....	C-25	YAZ40-2N.....	C-44
YAV702M10.....	C-119	YAZ1C-2TC14.....	C-43	YAZ30TC38FX.....	C-62	YAZ402NTCFX.....	C-76
YAV702M12.....	C-119	YAZ1C-2TC14E2.....	C-43	YAZ31-2N.....	C-44	YAZ40TC12.....	C-26
YAV702M14.....	C-119	YAZ1C-2TC38.....	C-43	YAZ312NTCFX.....	C-75	YAZ41-2N.....	C-44
YAV702M16.....	C-119	YAZ1CTC12.....	C-24	YAZ31-2TC14E2.....	C-44	YAZ41TC12.....	C-26
YAV702M6.....	C-119	YAZ1CTC14.....	C-24	YAZ312TC14E2FX.....	C-75	YAZ44-2N.....	C-45
YAV702M8.....	C-119	YAZ1CTC38.....	C-24	YAZ31-2TC38.....	C-44	YAZ442NT38FX.....	C-76, C-82
YAV70F2M10.....	C-132	YAZ25-2N.....	C-43	YAZ312TC38FX.....	C-75	YAZ44-2TC38.....	C-45
YAV70F2M12.....	C-132	YAZ25-2NTC38.....	C-43	YAZ314TCG1.....	C-107	YAZ44TC12.....	C-26
YAV70F2M14.....	C-132	YAZ25-2TC14.....	C-43	YAZ31TC12.....	C-25	YAZ44TC38.....	C-26
YAV70F2M16.....	C-132	YAZ25-2TC14E1.....	C-43	YAZ31TC38.....	C-25	YAZ45-2N.....	C-45
YAV70F2M6.....	C-132	YAZ25-2TC14E2.....	C-43	YAZ31TC38FX.....	C-62	YAZ453-2N.....	C-45
YAV70F2M8.....	C-132	YAZ252TC14E3.....	C-43	YAZ32-2N.....	C-44	YAZ453TC12.....	C-26
YAV70FM10.....	C-126	YAZ25-2TC38.....	C-43	YAZ32-2TC38.....	C-44	YAZ45TC12.....	C-26
YAV70FM12.....	C-126	YAZ25-2TC516.....	C-43	YAZ322TC38FX.....	C-75	YAZ46-2N.....	C-45
YAV70FM14.....	C-126	YAZ25-2TC516E6.....	C-43	YAZ32TC12.....	C-25	YAZ46TC12.....	C-26
YAV70FM16.....	C-126	YAZ254TC38E1G1.....	C-107	YAZ32TC38.....	C-25	YAZ47-2N.....	C-45
YAV70FM6.....	C-126	YAZ254TCG1.....	C-107	YAZ32TC38FX.....	C-62	YAZ47TC12.....	C-26
YAV70FM8.....	C-126	YAZ25TC12.....	C-25	YAZ33-2N.....	C-44	YAZ48-2N.....	C-45
YAV70M10.....	C-113	YAZ25TC14.....	C-25	YAZ33TC12.....	C-25	YAZ48TC12.....	C-26
YAV70M12.....	C-113	YAZ25TC38.....	C-25	YAZ34-2N.....	C-44	YAZ4C-2N.....	C-42
YAV70M14.....	C-113	YAZ25TC516.....	C-25	YAZ342NT38FX.....	C-75, C-82	YAZ4C-2TC10-E2.....	C-42
YAV70M16.....	C-113	YAZ26-2N.....	C-43	YAZ342NTCFX.....	C-75	YAZ4C-2TC14.....	C-42
YAV70M5.....	C-113	YAZ26-2TC14.....	C-43	YAZ34-2TC14E2.....	C-44	YAZ4C-2TC14E2.....	C-42
YAV70M6.....	C-113	YAZ262TC14E1.....	C-43	YAZ342TC14E2FX.....	C-75	YAZ4C-2TC38.....	C-42
YAV70M8.....	C-113	YAZ26-2TC14E2.....	C-43	YAZ34-2TC38.....	C-44	YAZ4CTC12.....	C-24
YAV8C-L.....	B-16	YAZ26-2TC38.....	C-43	YAZ342TC38FX.....	C-75	YAZ4CTC14.....	C-24
YAV8C-L1.....	B-16	YAZ262TC38E16.....	C-43	YAZ34NT38FX.....	C-62	YAZ4CTC38.....	C-24
YAV8C-L1BOX.....	B-16	YAZ264TC38E1G1.....	C-107	YAZ34TC12.....	C-25	YAZ5C-2N.....	C-42
YAV8C-L2.....	B-16	YAZ264TCG1.....	C-107	YAZ34TC12FX.....	C-62	YAZ5CTC12.....	C-24
YAV8C-L2BOX.....	B-16	YAZ26TC12.....	C-25	YAZ34TC38.....	C-25	YAZ6C-2N.....	C-42
YAV8C-L3.....	B-16	YAZ26TC14.....	C-25	YAZ34TC38FX.....	C-62	YAZ6C-2TC10E2.....	C-42
YAV8C-L3BOX.....	B-16	YAZ26TC38.....	C-25	YAZ35-2N.....	C-44	YAZ6C-2TC14.....	C-42
YAV8C-L4.....	B-16	YAZ27-2N.....	C-43	YAZ35TC12.....	C-25	YAZ6C-2TC14E1.....	C-42
YAV8C-L4BOX.....	B-16	YAZ27-2TC14E2.....	C-43	YAZ36-2N.....	C-44	YAZ6C-2TC14E2.....	C-42
YAV8C-LBOX.....	B-16	YAZ27-2TC38.....	C-43	YAZ36-2TC38.....	C-44	YAZ6C-2TC38.....	C-42
YAV8C-RS.....	B-23	YAZ27TC12.....	C-25	YAZ362TC38FX.....	C-75	YAZ6C2TC38E16.....	C-42
YAV8C-RS1.....	B-23	YAZ27TC38.....	C-25	YAZ36TC12.....	C-26	YAZ6C-2TC38E2.....	C-42
YAV8C-RS3.....	B-23	YAZ28-2N.....	C-44	YAZ36TC38.....	C-26	YAZ6C-2TC38E6.....	C-42
YAV952M10.....	C-120	YAZ28-2NTC38.....	C-44	YAZ36TC38FX.....	C-62	YAZ6CTC12.....	C-24
YAV952M12.....	C-120	YAZ28-2TC14E2.....	C-44	YAZ37-2N.....	C-44	YAZ6CTC14.....	C-24
YAV952M14.....	C-120	YAZ28-2TC38.....	C-44	YAZ37TC12.....	C-26	YAZ6CTC38.....	C-24
YAV952M16.....	C-120	YAZ284TCG1.....	C-107	YAZ382ENT38FX.....	C-82	YAZ8C-2TC10.....	C-42
YAV952M20.....	C-120	YAZ28TC12.....	C-25	YAZ38-2N.....	C-44	YAZ8C2TC1090SL.....	C-102
YAV952M8.....	C-120	YAZ28TC38.....	C-25	YAZ382NNTFX.....	C-76, C-82	YAZ8C-2TC10E2.....	C-42
YAV95F2M10.....	C-132	YAZ29-2N.....	C-44	YAZ382NT38FX.....	C-76, C-82	YAZ8C2TC10E2FX.....	C-74

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YAZ8C2TC10FX.....	C-74	YAZV2C2TC14FX.....	C-74	YBM2C-L.....	B-26	YCA31-2N.....	H-75
YAZ8C2TC10SL.....	C-102	YAZV2C2TC14FXSL.....	C-104	YBM2C-L1.....	B-26	YCA321R-2N.....	H-77
YAZ8C-2TC14.....	C-42	YAZV2C2TC14FXSLBOX500.....	C-104	YBM2C-L2.....	B-26	YCA321RL-2N.....	H-76
YAZ8C-2TC14E1.....	C-42	YAZV2C2TC38FX.....	C-74	YBM4C-L.....	B-26	YCA32-2N.....	H-75
YAZ8C2TC14E1FX.....	C-74	YAZV2C2TC38FXSL.....	C-104	YBM4C-L1.....	B-26	YCA33R-2N.....	H-77
YAZ8C-2TC14E2.....	C-42	YAZV2C2TC38FXSLBOX500.....	C-104	YBM4C-L2.....	B-26	YCA34-2N.....	H-75
YAZ8C2TC14E2FX.....	C-74	YAZV2CTC12FX.....	C-61	YBM4C-L4.....	B-26	YCA35R-2N.....	H-77
YAZ8C2TC14FX.....	C-74	YAZV2CTC14FX.....	C-61	YBM6C-L.....	B-26	YCA361R-2N.....	H-77
YAZ8C-2TC38.....	C-42	YAZV2CTC38FX.....	C-61	YBM6C-L2.....	B-26	YCA37R-2N.....	H-77
YAZ8C2TC38FX.....	C-74	YAZV4C2NT14E2FX.....	C-82	YBM6C-L3.....	B-26	YCA391A-2N.....	H-78
YAZ8CTC10.....	C-24, C-61	YAZV4C2TC14E2FX.....	C-74	YBM6C-L9.....	B-26	YCA39-2N.....	H-75
YAZ8CTC14.....	C-24, C-61	YAZV4C2TC14FX.....	C-74	YBM8C.....	B-26	YCA39R-2N.....	H-77
YAZ8CTC38.....	C-24, C-61	YAZV4C2TC14FXSL.....	C-104	YBM8C-T2.....	B-26	YCA43R-2N.....	H-78
YAZV10-2TC14.....	C-42	YAZV4C2TC14FXSLBOX500.....	C-104	YBM8CT4.....	B-26	YCA441A-4N.....	H-78
YAZV102TC14E1.....	C-74	YAZV4C2TC38E2-FX.....	C-74	YC10C10.....	C-187, H-22	YCA44A2NG2.....	H-78
YAZV10-2TC14E2.....	C-42	YAZV4C2TC38FX.....	C-74	YC1L12.....	C-186	YCA451A-4N.....	H-78
YAZV102TC14SL.....	C-104	YAZV4C2TC38FXSL.....	C-104	YC1U1.....	H-26	YCA45R-2N.....	H-78
YAZV10TC14.....	C-24	YAZV4C2TC38FXSLBOX500.....	C-104	YC25A2.....	H-23	YCA48R-4N.....	H-78
YAZV1C2TC14E1FX.....	C-74	YAZV4CTC14FX.....	C-61	YC25A25.....	H-23	YCA4R-2N.....	H-77
YAZV1C2TC14E2FX.....	C-74	YAZV4CTC38FX.....	C-61	YC25A4.....	H-23	YCA4RL-2N.....	H-76
YAZV1C2TC14FX.....	C-74	YAZV6C2TC10E2FX.....	C-74	YC25L12.....	C-186	YCA28-4N.....	H-75
YAZV1C2TC38FX.....	C-74	YAZV6C2TC10FX90SL.....	C-104	YC26A25.....	H-23	YCA28-4N.....	H-75
YAZV1C2TC516E6FX.....	C-74	YAZV6C2TC14E1FX.....	C-74	YC26A26.....	H-23	YCA28-4N.....	H-75
YAZV1C2TC516FX.....	C-74	YAZV6C2TC14E2FX.....	C-74	YC26C2.....	C-187, H-22	YCA28-4N.....	H-75
YAZV1CTC14FX.....	C-61	YAZV6C2TC14FX.....	C-74	YC26C26.....	C-187, H-22	YCA28-4N.....	H-75
YAZV1CTC38FX.....	C-61	YAZV6C2TC14FXSL.....	C-104	YC26L12.....	C-186	YCA25R-4N.....	H-77
YAZV1CTC516FX.....	C-61	YAZV6C2TC14FXSLBOX500.....	C-104	YC27L12.....	C-186	YCA28A-2G1.....	H-80
YAZV252NT14FX.....	C-82	YAZV6C2TC38E2FX.....	C-74	YC28A2.....	H-23	YCA28R-4N.....	H-77
YAZV252NTCFX.....	C-74	YAZV6C2TC38E6FX.....	C-74	YC28A25.....	H-23	YCA29A-2G1.....	H-80
YAZV252TC14E2FX.....	C-74	YAZV6C2TC38FX.....	C-74	YC28A26.....	H-23	YCA28R-4N.....	H-77
YAZV252TC14FX.....	C-74	YAZV6C2TC38FXSL.....	C-104	YC28A28.....	H-23	YCA28R-4N.....	H-77
YAZV252TC14FXSL.....	C-104	YAZV6C2TC38FXSLBOX500.....	C-104	YC28C2.....	C-187, H-22	YCA28R-4N.....	H-77
YAZV252TC14FXSLBOX500.....	C-104	YAZV6CTC14FX.....	C-61	YC28C26.....	C-187, H-22	YCA28R-4N.....	H-77
YAZV252TC38FX.....	C-74	YAZV6CTC38FX.....	C-61	YC28C28.....	C-187, H-22	YCA28R-4N.....	H-77
YAZV252TC38FXSL.....	C-104	YBA15ALKIT.....	C-95	YC28U26.....	H-26	YCA28R-4N.....	H-77
YAZV252TC38FXSLBOX500.....	C-104	YBA25A.....	C-94	YC2A2.....	H-23	YCA28R-4N.....	H-77
YAZV25TC12FX.....	C-61	YBA26A.....	C-94	YC2A4.....	H-23	YCA28R-4N.....	H-77
YAZV25TC14FX.....	C-61	YBA27A.....	C-94	YC2C2.....	C-187, H-22	YCA28R-4N.....	H-77
YAZV25TC38FX.....	C-61	YBA28A.....	C-94	YC2C4.....	C-187, H-22	YCA28R-4N.....	H-77
YAZV262NTCFX.....	C-75	YBA29.....	C-91	YC2L12.....	C-186	YCA28R-4N.....	H-77
YAZV262TC14E2FX.....	C-75	YBA29A.....	C-94	YC33R26.....	H-23	YCA28R-4N.....	H-78
YAZV262TC14FX.....	C-75	YBA30A.....	C-94	YC33R26U.....	H-26	YCA28R-4N.....	H-80
YAZV262TC14FXSL.....	C-104	YBA31A.....	C-94	YC3L12.....	C-186	YCA28R-4N.....	H-77
YAZV262TC14FXSLBOX500.....	C-104	YBA31FX.....	C-91	YC4A4.....	H-23	YCA28R-4N.....	H-78
YAZV262TC38E6FX.....	C-75	YBA32A.....	C-94	YC4A6.....	H-23	YCA28R-4N.....	H-80
YAZV262TC38FX.....	C-75	YBA32FX.....	C-91	YC4C4.....	C-187, H-22	YCA28R-4N.....	H-78
YAZV262TC38FXSL.....	C-104	YBA34A.....	C-94	YC4C6.....	C-187, H-22	YCA28R-4N.....	H-78
YAZV262TC38FXSLBOX500.....	C-104	YBA34FX.....	C-91	YC4C8.....	C-187, H-22	YCA28R-4N.....	H-78
YAZV26TC12FX.....	C-61	YBA36A.....	C-94	YC4L12.....	C-186	YCB1U1.....	H-39
YAZV26TC14FX.....	C-61	YBA36FX.....	C-92	YC4U1.....	H-26	YCB25R.....	H-38
YAZV26TC38FX.....	C-61	YBA36FX58.....	C-92	YC6L12.....	C-186	YCB26R.....	H-38
YAZV272TC14E2FX.....	C-75	YBA38FX.....	C-92	YC8C8.....	C-187, H-22	YCB27R.....	H-38
YAZV272TC38FX.....	C-75	YBA39.....	C-92	YC8L12.....	C-186	YCB28R.....	H-38
YAZV27TC38FX.....	C-61	YBA39A.....	C-94	YCA25-2N.....	H-75	YCB28U26.....	H-39
YAZV282NT38FX.....	C-82	YBA42A.....	C-94	YCA25R-2N.....	H-77	YCB2R.....	H-38
YAZV282NTCFX.....	C-75	YBA44A.....	C-94	YCA25RL-2N.....	H-76	YCB321R.....	H-38
YAZV282TC14E2FX.....	C-75	YBA44FX.....	C-92	YCA26-2N.....	H-75	YCB33R.....	H-38
YAZV282TC14FXSL.....	C-104	YBA44FX58.....	C-92	YCA26R-2N.....	H-77	YCB33R26U.....	H-39
YAZV282TC14FXSLBOX500.....	C-104	YBAFX15CLKIT.....	C-95	YCA26RL-2N.....	H-76	YCB35R.....	H-38
YAZV282TC38FX.....	C-75	YBAV25FX14.....	C-91	YCA27-2N.....	H-75	YCB361R.....	H-38
YAZV282TC38FXSL.....	C-104	YBAV26FX14.....	C-91	YCA27R-2N.....	H-77	YCB38R26U.....	H-39
YAZV282TC38FXSLBOX500.....	C-104	YBAV27FX14.....	C-91	YCA27RL-2N.....	H-76	YCB4U1.....	H-39
YAZV28NT38FX.....	C-61	YBAV28FX.....	C-91	YCA28-2N.....	H-75	YCHC29TC2.....	C-188
YAZV28TC12FX.....	C-61	YBM1C-L.....	B-26	YCA28-2N.....	H-77	YCHC29TC29.....	C-188
YAZV28TC38FX.....	C-61	YBM1C-L3.....	B-26	YCA28R-2N.....	H-77	YCHC2TC2.....	C-188
YAZV292NT516FX.....	C-75, C-82	YBM25-L.....	B-26	YCA28RL-2N.....	H-76	YCHC34TC2.....	C-188
YAZV29NT516FX.....	C-61	YBM25-L1.....	B-26	YCA29-2N.....	H-75	YCHC34TC29.....	C-188
YAZV2C2NT14E2FX.....	C-82	YBM25-L2.....	B-26	YCA2R-2N.....	H-77	YCHC34TC34.....	C-188
YAZV2C2NTCFX.....	C-74	YBM26-L.....	B-26	YCA2RL-2N.....	H-76	YCHC39TC2.....	C-188
YAZV2C2TC14E2FX.....	C-74	YBM28-1/4.....	B-26	YCA30-2N.....	H-75	YCHC39TC31.....	C-188
				YCA30R-2N.....	H-77	YCHC39TC39.....	C-188

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YCHC44TC44	C-188	YCU25A	H-50	YDS28	H-64	YDS3K10	H-67
YCHC8TC8	C-188	YCU25R	H-55	YDS28AT	H-57	YDS3K5	H-67
YCR25RG6	H-54	YCU26R	H-55	YDS28F	H-58, H-60	YDS3K6	H-67, H-68
YCR2625	H-53	YCU27R	H-55	YDS28R	H-68	YDS3K7	H-67
YCR26RG2	H-54	YCU28A	H-50	YDS28RE	H-62	YDS3K8	H-67
YCR26RG3	H-54	YCU28R	H-55	YDS28RL	H-64	YDS3W	H-56
YCR2725	H-53	YCU291A	H-50	YDS28RLY	H-59	YDS40R	H-63
YCR27RG5	H-54	YCU2CA	H-50	YDS28RP1	H-61	YDS41RP2	H-62, H-63
YCR27RG6	H-54	YCU2R	H-55	YDS28RP2	H-62, H-64	YDS42R	H-63
YCR2825	H-53	YCU301A	H-50	YDS29	H-62	YDS431AT	H-58
YCR28RG5	H-54	YCU30R	H-55	YDS291AT	H-57	YDS43R43RS	H-63
YCR28RG6	H-54	YCU321R	H-55	YDS291R	H-58	YDS43R45RS	H-63
YCR28RG7	H-54	YCU4R	H-55	YDS291RP1	H-62	YDS43RP1	H-63
YCR28RG8	H-54	YCU4RG1	H-55	YDS29AT	H-62	YDS43RP2	H-63
YCR291RG2	H-54	YCU4R1	H-55	YDS29AT	H-58	YDS44	H-57
YCR291RG3	H-54	YCU4R2	H-55	YDS2C	H-50, H-57	YDS44RP2	H-62
YCR291RG4	H-54	YCU4R3	H-55	YDS2C-3	H-57	YDS451R34RS	H-63
YCR291RG5	H-54	YCU4R4	H-55	YDS2CA	H-58, H-60	YDS451R49RS	H-63
YCR30RG4	H-54	YCU4R5	H-55	YDS2F	H-68	YDS451RP1	H-63
YCR30RG6	H-54	YCU4R6	H-55	YDS2KT	H-68	YDS45R45RS	H-63
YCR30RG7	H-54	YCU4R7	H-55	YDS2RE	H-64	YDS45RP1	H-63
YCR32RG1	H-54	YCU4R8	H-55	YDS2REP2	H-64	YDS45RP2	H-63
YCR32RG2	H-54	YCU4R9	H-55	YDS2RL	H-59	YDS49R	H-63
YCR32RG3	H-54	YCU4R10	H-55	YDS2RLY	H-61	YDS49RP1	H-63
YCR32RG4	H-54	YCU4R11	H-55	YDS2W	H-50, H-56	YDS49RP2	H-63
YCR32RG5	H-54	YCU4R12	H-55	YDS2WA	H-58	YDS4C	H-50, H-57
YCR32RG6	H-54	YCU4R13	H-55	YDS30	H-57	YDS4CA	H-49, H-58
YCR32RG7	H-54	YCU4R14	H-55	YDS301AT	H-58	YDS4KT	H-68
YCS25	H-50	YCU4R15	H-55	YDS301LT	H-60	YDS4RL	H-59
YCS25R	H-49, H-51	YCU4R16	H-55	YDS30R	H-62	YDS4RLY	H-61
YCS25RL	H-52	YCU4R17	H-55	YDS30RP1	H-62	YDS4W	H-50, H-56
YCS26	H-50	YCU4R18	H-55	YDS30RP2	H-62	YDS4WA	H-49, H-58
YCS26A	H-53	YCU4R19	H-55	YDS31	H-62	YDS500H	H-64
YCS26R	H-51	YCU4R20	H-55	YDS311AT	H-58, H-60	YDS50R	H-63
YCS26RL	H-52	YCU4R21	H-55	YDS312E	H-64	YDS6C	H-50, H-57
YCS27	H-50	YCU4R22	H-55	YDS312H	H-64	YDS6CA	H-58
YCS27R	H-51	YCU4R23	H-55	YDS31AT	H-58	YDS6KT	H-68
YCS28	H-50	YCU4R24	H-55	YDS32	H-57	YDS6W	H-50, H-56
YCS28A	H-53	YCU4R25	H-55	YDS321R	H-62	YDS6WA	H-58
YCS28R	H-51	YCU4R26	H-55	YDS321RL	H-59	YDS6WK	H-67
YCS28RL	H-52	YCU4R27	H-55	YDS321RLY	H-61	YDS75	H-56
YCS29	H-50	YCU4R28	H-55	YDS321RP1	H-62	YDS76	H-56
YCS2R	H-51	YCU4R29	H-55	YDS326R	H-62	YDS78	H-56
YCS30	H-50	YCU4R30	H-55	YDS32LT	H-60	YDS7K5	H-67
YCS301A	H-53	YCU4R31	H-55	YDS32R	H-62	YDS7K6	H-67
YCS30R	H-51	YCU4R32	H-55	YDS32RP2	H-62	YDS7K7	H-67
YCS31	H-50	YCU4R33	H-55	YDS331AT	H-58, H-60	YDS7M10T	H-68, I-45
YCS311A	H-53	YCU4R34	H-55	YDS33R	H-62	YDS7M6T	H-68, I-45
YCS32	H-50	YCU4R35	H-55	YDS33RP1	H-62	YDS7M7T	H-68, I-45
YCS321R	H-51	YCU4R36	H-55	YDS34	H-57	YDS7M8T	H-68, I-45
YCS321RL	H-52	YCU4R37	H-55	YDS341RL	H-60	YDS7M9T	H-68, I-45
YCS331A	H-53	YCU4R38	H-55	YDS34R	H-62	YDS8KT	H-68
YCS33R	H-51	YCU4R39	H-55	YDS34RP2	H-62, H-63	YDS8W	H-50, H-56
YCS34	H-50	YCU4R40	H-55	YDS351AT	H-58	YDS8WG1	H-56
YCS341RL	H-52	YCU4R41	H-55	YDS35R	H-62	YDS8WK	H-67
YCS351A	H-53	YCU4R42	H-55	YDS35RP1	H-62	YDSR25RL	H-65
YCS35R	H-51	YCU4R43	H-55	YDS361AT	H-58	YDSR26RL	H-65
YCS361A	H-53	YCU4R44	H-55	YDS361R	H-62, H-64	YDSR27RL	H-65
YCS361R	H-51	YCU4R45	H-55	YDS361RL	H-60, H-65	YDSR28RL	H-65
YCS37R	H-51	YCU4R46	H-55	YDS361RP1	H-62, H-64	YDSR2RL	H-65
YCS39	H-50	YCU4R47	H-55	YDS36LT	H-60	YDSR321RL	H-65
YCS391A	H-53	YCU4R48	H-55	YDS36R	H-62	YDSR341RL	H-65
YCS39R	H-51	YCU4R49	H-55	YDS36RP2	H-62, H-63	YDSR4RL	H-65
YCS43R	H-51	YCU4R50	H-55	YDS375H	H-64	YE1WAG1	H-43
YCS44	H-50	YCU4R51	H-55	YDS37RP1	H-62	YE25-LH97	H-43
YCS453R	H-51	YCU4R52	H-55	YDS39	H-57	YE25R-25	H-43
YCS45R	H-51	YCU4R53	H-55	YDS391AT	H-58	YE26-LH88	H-43
YCS4R	H-51	YCU4R54	H-55	YDS392R	H-63	YE26-LH89	H-43
YCT2626	H-32	YCU4R55	H-55	YDS39RP1	H-63	YE26R-60	H-43
YCT2828	H-32	YCU4R56	H-55	YDS3C-3	H-57	YE27R-60	H-43



**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YE28-LH128.....	H-43	YEV28P46X92FX.....	C-138	YF0612IW.....	B-89	YF1606IT.....	B-88
YE28R-60.....	H-43	YEV2CP20X75FX.....	C-140	YF0612UI.....	B-86	YF1606IW.....	B-88
YE29P31X109.....	C-140	YEV2CP23X75FX.....	C-139	YF0615UI.....	B-86	YF1607UI.....	B-85
YE29P41X82.....	C-140	YEV2CP26X75FX.....	C-138	YF0618ID.....	B-89	YF1608ID.....	B-88
YE29P46X92.....	C-139	YEV4CP16X75FX.....	C-140	YF0618IT.....	B-89	YF1608IT.....	B-88
YE29P50X100.....	C-138	YEV4CP20X75FX.....	C-138	YF0618IW.....	B-89	YF1608IW.....	B-88
YE2C-LH128.....	H-43	YF0112ID.....	B-89	YF0618UI.....	B-86	YF1608UI.....	B-85
YE2C-LH129.....	H-43	YF0112IT.....	B-89	YF0625UI.....	B-86	YF1610ID.....	B-88
YE2R-25.....	H-43	YF0112IW.....	B-89	YF0801TOOL.....	N-41	YF1610IT.....	B-88
YE2WAG5.....	H-43	YF0116ID.....	B-89	YF0812ID.....	B-89	YF1610IW.....	B-88
YE30P46X92.....	C-140	YF0116IT.....	B-89	YF0812IT.....	B-89	YF1610UI.....	B-85
YE30P46X92FX.....	C-139	YF0116IW.....	B-89	YF0812IW.....	B-89	YF1612ID.....	B-88
YE30P50X100.....	C-139	YF0120ID.....	B-89	YF0812UI.....	B-86	YF1612IT.....	B-88
YE30P50X100FX.....	C-138	YF0120IT.....	B-89	YF0815ID.....	B-89	YF1612IW.....	B-88
YE30P55X110.....	C-138	YF0120IW.....	B-89	YF0815IT.....	B-89	YF1612UI.....	B-85
YE30R-60.....	H-43	YF0122ID.....	B-89	YF0815IW.....	B-89	YF1615ID.....	B-88
YE31-LH96.....	H-43	YF0122IT.....	B-89	YF0815UI.....	B-86	YF1615IT.....	B-88
YE31P41X82FX.....	C-140	YF0122IW.....	B-89	YF0818ID.....	B-89	YF1615IW.....	B-88
YE31P50X100.....	C-140	YF0122UI.....	B-86	YF0818IT.....	B-89	YF1618ID.....	B-88
YE31P51X102FX.....	C-138	YF0125ID.....	B-89	YF0818IW.....	B-89	YF1618IT.....	B-88
YE31P55X110.....	C-139	YF0125IT.....	B-89	YF0818UI.....	B-86	YF1618IW.....	B-88
YE31P59X118.....	C-138	YF0125IW.....	B-89	YF103/0TOOL.....	N-41	YF1618UI.....	B-85
YE32P51X102FX.....	C-139	YF0125UI.....	B-86	YF1006TOOL.....	N-41	YF1806ID.....	B-87
YE32P55X110.....	C-140	YF0130ID.....	B-89	YF1010ID.....	B-88	YF1806IT.....	B-87
YE32P55X110FX.....	C-138	YF0130IT.....	B-89	YF1010IT.....	B-88	YF1806IW.....	B-87
YE32P59X118.....	C-139	YF0130IW.....	B-89	YF1010IW.....	B-88	YF1806UI.....	B-85
YE32P63X126.....	C-138	YF0132UI.....	B-86	YF1010UI.....	B-85	YF1808ID.....	B-88
YE32R-60.....	H-43	YF0215UI.....	B-86	YF1012ID.....	B-88	YF1808IT.....	B-88
YE34-LH119.....	H-43	YF0216ID.....	B-89	YF1012IT.....	B-88	YF1808IW.....	B-88
YE34-LH120.....	H-43	YF0216IT.....	B-89	YF1012IW.....	B-88	YF1808UI.....	B-85
YE34P51X102FX.....	C-140	YF0216IW.....	B-89	YF1012UI.....	B-85	YF1810ID.....	B-88
YE34P55X110FX.....	C-139	YF0218ID.....	B-89	YF1015UI.....	B-85	YF1810IT.....	B-88
YE34P59X118.....	C-140	YF0218IT.....	B-89	YF1018ID.....	B-88	YF1810IW.....	B-88
YE34P59X118FX.....	C-138	YF0218IW.....	B-89	YF1018IT.....	B-88	YF1810UI.....	B-85
YE34P63X126.....	C-139	YF0220UI.....	B-86	YF1018IW.....	B-88	YF1812ID.....	B-88
YE34P71X142.....	C-138	YF0222ID.....	B-89	YF1018UI.....	B-85	YF1812IT.....	B-88
YE36IR-60.....	H-43	YF0222IT.....	B-89	YF1209ID.....	B-88	YF1812IW.....	B-88
YE36P59X118FX.....	C-139	YF0222IW.....	B-89	YF1209IT.....	B-88	YF1812UI.....	B-85
YE36P63X126.....	C-140	YF0225ID.....	B-89	YF1209IW.....	B-88	YF1818ID.....	B-88
YE36P67X134FX.....	C-138	YF0225IT.....	B-89	YF1209UI.....	B-85	YF1818IT.....	B-88
YE36P71X142.....	C-139	YF0225IW.....	B-89	YF1210ID.....	B-88	YF1818IW.....	B-88
YE36P78X156.....	C-138	YF0225UI.....	B-86	YF1210IT.....	B-88	YF2/020ID.....	B-89
YE38P59X118FX.....	C-140	YF0232UI.....	B-86	YF1210IW.....	B-88	YF2/022UI.....	B-86
YE38P67X134FX.....	C-139	YF0401TOOL.....	N-41	YF1212ID.....	B-88	YF2/025ID.....	B-89
YE38P71X142FX.....	C-138	YF0412ID.....	B-89	YF1212IT.....	B-88	YF2/025UI.....	B-86
YE39P71X142.....	C-140	YF0412IT.....	B-89	YF1212IW.....	B-88	YF2/027ID.....	B-89
YE39P78X156.....	C-139	YF0412IW.....	B-89	YF1212UI.....	B-85	YF2/032UI.....	B-86
YE39P87X174.....	C-138	YF0412UI.....	B-86	YF1215UI.....	B-85	YF2006IT.....	B-87
YE39R-60.....	H-43	YF0415ID.....	B-89	YF1218ID.....	B-88	YF2006IW.....	B-87
YE40P67X134FX.....	C-140	YF0415IT.....	B-89	YF1218IT.....	B-88	YF2006UI.....	B-85
YE40P71X142FX.....	C-139	YF0415IW.....	B-89	YF1218IW.....	B-88	YF2008ID.....	B-87
YE40P78X156FX.....	C-138	YF0415UI.....	B-86	YF1218UI.....	B-85	YF2008IT.....	B-87
YE44P78X156FX.....	C-139	YF0416ID.....	B-89	YF1407UI.....	B-85	YF2008IW.....	B-87
YE44P87X174FX.....	C-138	YF0416IT.....	B-89	YF1408ID.....	B-88	YF2010ID.....	B-87
YE4R-25.....	H-43	YF0416IW.....	B-89	YF1408IT.....	B-88	YF2010IT.....	B-87
YE6R-25.....	H-43	YF0418ID.....	B-89	YF1408IW.....	B-88	YF2010IW.....	B-87
YEV1CP23X75FX.....	C-140	YF0418IT.....	B-89	YF1408UI.....	B-85	YF2010UI.....	B-85
YEV1CP26X75FX.....	C-139	YF0418IW.....	B-89	YF1410ID.....	B-88	YF2012ID.....	B-87
YEV1CP29X75FX.....	C-138	YF0418UI.....	B-86	YF1410IT.....	B-88	YF2012IT.....	B-87
YEV25P26X75FX.....	C-140	YF0420UI.....	B-86	YF1410IW.....	B-88	YF2012IW.....	B-87
YEV25P29X75FX.....	C-139	YF0422ID.....	B-89	YF1410UI.....	B-85	YF2012UI.....	B-85
YEV25P33X75FX.....	C-138	YF0422IT.....	B-89	YF1412ID.....	B-88	YF2018ID.....	B-87
YEV26P29X75FX.....	C-140	YF0422IW.....	B-89	YF1412IT.....	B-88	YF2018IT.....	B-87
YEV26P33X75FX.....	C-139	YF0425ID.....	B-89	YF1412IW.....	B-88	YF2018IW.....	B-87
YEV26P37X75FX.....	C-138	YF0425IT.....	B-89	YF1412UI.....	B-85	YF2205ID.....	B-87
YEV27P33X75FX.....	C-140	YF0425IW.....	B-89	YF1418ID.....	B-88	YF2205IT.....	B-87
YEV27P37X75FX.....	C-139	YF0425UI.....	B-86	YF1418IT.....	B-88	YF2205IW.....	B-87
YEV27P41X82FX.....	C-138	YF0432UI.....	B-86	YF1418IW.....	B-88	YF2206ID.....	B-87
YEV28P37X75FX.....	C-140	YF0612ID.....	B-89	YF1418UI.....	B-85	YF2206IT.....	B-87
YEV28P41X75FX.....	C-139	YF0612IT.....	B-89	YF1606ID.....	B-88	YF2206IW.....	B-87

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YF2206UI	B-85	YFA32CPL2	K-46	YFMR34	K-51	YFTW1808D	B-91
YF2208ID	B-87	YFA32CR2	K-45	YFMR39	K-51	YFTW1808T	B-91
YF2208IT	B-87	YFA34CP-2	K-45	YFN-540	C-212	YFTW1808W	B-91
YF2208IW	B-87	YFA34CPL2	K-46	YFO-140	C-212	YFTW1810D	B-91
YF2208UI	B-85	YFA34CR2	K-45	YFR-865	C-212	YFTW1810T	B-91
YF2210FL	N-40	YFA39CP-2	K-45	YFS28CPL	K-42	YFTW1810W	B-91
YF2210ID	B-87	YFA39CPL2	K-46	YFS28CR	K-41	YFTW2008D	B-91
YF2210IT	B-87	YFA39CR2	K-45	YFS29CP	K-41	YFTW2008T	B-91
YF2210IW	B-87	YFAP282	K-47	YFS29CPL	K-42	YFTW2008W	B-91
YF2210TOOL	N-41	YFAP28L2	K-48	YFS29CR	K-41	YFTW2010D	B-91
YF2210UI	B-85	YFAP292	K-47	YFS30CP	K-41	YFTW2010T	B-91
YF2212ID	B-87	YFAP29L2	K-48	YFS30CPL	K-42	YFTW2010W	B-91
YF2212IT	B-87	YFAP302	K-47	YFS30CR	K-41	YFTW2208D	B-91
YF2212IW	B-87	YFAP30L2	K-48	YFS31CP	K-41	YFTW2208T	B-91
YF2212UI	B-85	YFAP312	K-47	YFS31CPL	K-42	YFTW2208W	B-91
YF2214TOOL	N-41	YFAP31L2	K-48	YFS31CR	K-41	YG14B2TC2C2C	E-31
YF2405UI	B-85	YFAP322	K-47	YFS32CP	K-41	YG14B2TC2C6C	E-31
YF2406IT	B-87	YFAP32L2	K-48	YFS32CPL	K-42	YG14BTC28	E-31
YF2406IW	B-87	YFAP342	K-47	YFS32CR	K-41	YG916BTC26	E-31
YF2407UI	B-85	YFAP34L2	K-48	YFS34CP	K-41	YGA25-2N	E-22
YF2408IT	B-87	YFAP392	K-47	YFS34CPL	K-42	YGA26-2N	E-22
YF2408IW	B-87	YFAP39L2	K-48	YFS34CR	K-41	YGA28-2N	E-22
YF25025ID	B-90	YFAR282	K-47	YFS39CP	K-41	YGA29-2N	E-22
YF25027ID	B-90	YFAR292	K-47	YFS39CPL	K-42	YGA2C-2N	E-22
YF25032ID	B-90	YFAR302	K-47	YFS39CR	K-41	YGA2C-2TC38	E-22
YF25032UI	B-86	YFAR312	K-47	YFSP28	K-43	YGA34-2N	E-22
YF25038ID	B-90	YFAR322	K-47	YFSP28L	K-44	YGA6C-2N	E-22
YF25040UI	B-86	YFAR342	K-47	YFSP29	K-43	YGA6C-2TC38E2G1	E-22
YF2605UI	B-85	YFAR392	K-47	YFSP29L	K-44	YGA6C-TC10	E-22
YF2606ID	B-87	YFD-365	C-212	YFSP30	K-43	YGA6C-TC14	E-22
YF2606IT	B-87	YFM28CP	K-49	YFSP30L	K-44	YGA6C-TC516	E-22
YF2606IW	B-87	YFM28CPL	K-50	YFSP31	K-43	YGA8C-2N	E-22
YF2607UI	B-85	YFM28CR	K-49	YFSP31L	K-44	YGA8C-TC10	E-22
YF2608ID	B-87	YFM29CP	K-49	YFSP32	K-43	YGA8C-TC14	E-22
YF2608IT	B-87	YFM29CPL	K-50	YFSP32L	K-44	YGA8C-TC516	E-22
YF2608IW	B-87	YFM29CR	K-49	YFSP34	K-43	YGC6C6	E-17
YF2610TOOL	N-41	YFM30CP	K-49	YFSP34L	K-44	YGC6C8	E-17
YF2806IT	B-87	YFM30CPL	K-50	YFSP39	K-43	YGC8C8	E-17
YF2806IW	B-87	YFM30CR	K-49	YFSP39L	K-44	YGF29-2N	E-26
YF2807UI	B-85	YFM31CP	K-49	YFSR28	K-43	YGF29-4N	E-26
YF2808IT	B-87	YFM31CPL	K-50	YFSR29	K-43	YGF34-2N	E-26
YF2808IW	B-87	YFM31CR	K-49	YFSR30	K-43	YGF34-4N	E-26
YF3/025ID	B-89	YFM32CP	K-49	YFSR31	K-43	YGHA25-2N	E-21
YF3/025UI	B-86	YFM32CPL	K-50	YFSR32	K-43	YGHA26-2N	E-21
YF3/030ID	B-89	YFM32CR	K-49	YFSR34	K-43	YGHA27-2N	E-21
YF3/030UI	B-86	YFM34CP	K-49	YFSR39	K-43	YGHA28-2N	E-21
YF3/032UI	B-86	YFM34CPL	K-50	YFTW0614D	B-91	YGHA29-2N	E-21
YF3206TOOL	N-41	YFM34CR	K-49	YFTW0614T	B-91	YGHA2C-2N	E-21
YF35032UI	B-86	YFM39CP	K-49	YFTW0614W	B-91	YGHA31-2N	E-21
YF35040UI	B-86	YFM39CPL	K-50	YFTW0814D	B-91	YGHA34-2N	E-21
YF4/0250TOOL	N-41	YFM39CR	K-49	YFTW0814T	B-91	YGHC26C2	E-15
YF4/027ID	B-90	YFMP28	K-51	YFTW0814W	B-91	YGHC26C26	E-15
YF4/030ID	B-90	YFMP28L	K-52	YFTW1014D	B-91	YGHC29C26	E-15
YF4/032ID	B-90	YFMP29	K-51	YFTW1014T	B-91	YGHC29C29	E-15
YF4/032UI	B-86	YFMP29L	K-52	YFTW1014W	B-91	YGHC2C2	E-15
YF4/034ID	B-90	YFMP30	K-51	YFTW1212D	B-91	YGHC34C26	E-15
YF4/034UI	B-86	YFMP30L	K-52	YFTW1212T	B-91	YGHC34C29	E-15
YF4/040UI	B-86	YFMP31	K-51	YFTW1212W	B-91	YGHC34C34	E-15
YFA28CP-2	K-45	YFMP31L	K-52	YFTW1410D	B-91	YGHC34C34	E-15
YFA28CPL2	K-46	YFMP32	K-51	YFTW1410T	B-91	YGHC29C26	E-16
YFA28CR2	K-45	YFMP32L	K-52	YFTW1410W	B-91	YGHC29C29	E-16
YFA29CP-2	K-45	YFMP34	K-51	YFTW1413D	B-91	YGHC34C26	E-16
YFA29CPL2	K-46	YFMP34L	K-52	YFTW1413T	B-91	YGHC34C29	E-16
YFA29CR2	K-45	YFMP39	K-51	YFTW1413W	B-91	YGHC34C34	E-16
YFA30CP-2	K-45	YFMP39L	K-52	YFTW1608D	B-91	YGHP29C2	E-13
YFA30CPL2	K-46	YFMR28	K-51	YFTW1608T	B-91	YGHP29C26	E-13
YFA30CR2	K-45	YFMR29	K-51	YFTW1608W	B-91	YGHP29C29	E-13
YFA31CP-2	K-45	YFMR30	K-51	YFTW1612D	B-91	YGHP29C6W6W	E-13
YFA31CPL2	K-46	YFMR31	K-51	YFTW1612T	B-91	YGHP2C2	E-13
YFA31CR2	K-45	YFMR32	K-51	YFTW1612W	B-91	YGHP2C6W6W	E-13

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YGHP34C2	E-13	YGS34	E-25	YHN500J1496	H-40	YHSA18K10FRK	B-31
YGHP34C26	E-13	YGS6C	E-25	YHN-525	H-30	YHSA18K10LF	B-36
YGHP34C29	E-13	YGS8C	E-25	YHN-550	H-30	YHSA18K10RK	B-12
YGHP34C34	E-13	YGT275	E-30	YHN-600	H-30	YHSA18K14	B-12
YGHP58C2W-2	E-14	YH2929	C-190, C-192	YHO-1	H-31	YHSA18K14RK	B-12
YGHP58C2W-2TN	E-14	YH2929WC	C-190, C-192	YHO100	H-28, H-39	YHSA18K38	B-12
YGHR26C100	E-19	YH2929WCC	C-190, C-192	YHO-100	H-29	YHSA18K38RK	B-12
YGHR26C12	E-19	YH292C	C-190, C-192	YHO100J1444	H-40	YHSA18K516	B-12
YGHR26C34	E-19	YH292CWC	C-190, C-192	YHO125	H-31	YHSA18K516RK	B-12
YGHR26C58	E-19	YH292CWCC	C-190, C-192	YHO-125	H-29	YHSA18K6	B-12
YGHR29C100	E-19	YH298C	C-190, C-192	YHO150	H-28, H-39	YHSA18K6BF	B-41
YGHR29C12	E-19	YH298CWC	C-190, C-192	YHO-150	H-29	YHSA18K6F	B-31
YGHR29C34	E-19	YH298CWCC	C-190, C-192	YHO150J1444	H-40	YHSA18K6FRK	B-31
YGHR29C58	E-19	YH2C2C	C-190, C-192	YHO2	H-28	YHSA18K6LF	B-36
YGHR34C100	E-19	YH2C2CWC	C-190, C-192	YHO-2	H-31	YHSA18K6RK	B-12
YGHR34C34	E-19	YH2C2CWCC	C-190, C-192	YHR-700	H-30	YHSA18K8	B-12
YGHR34C58	E-19	YH3429	C-190, C-192	YHR-750	H-30	YHSA18K8BF	B-41
YGHR58C2W-3	E-20	YH3429WC	C-190, C-192	YHR-800	H-30	YHSA18K8F	B-31
YGHS25	E-24	YH3429WCC	C-190, C-192	YHR-850	H-30	YHSA18K8FRK	B-31
YGHS26	E-24	YH3434	C-190, C-192	YHR-900	H-30	YHSA18K8LF	B-36
YGHS27	E-24	YH3434WC	C-190, C-192	YHR-950	H-30	YHSA18K8RK	B-12
YGHS28	E-24	YH3434WCC	C-190, C-192	YHSA10K10	B-12	YHSFQ10F25X03	B-70
YGHS29	E-24	YH3931	C-190, C-192	YHSA10K10BF	B-41	YHSFQ10F25X03RK	B-70
YGHS2C	E-24	YH3931WC	C-190, C-192	YHSA10K10F	B-31	YHSFQ14F25X03	B-70
YGHS31	E-24	YH3931WCC	C-190, C-192	YHSA10K10FRK	B-31	YHSFQ14F25X03RK	B-70
YGHS34	E-24	YH3939	C-190, C-192	YHSA10K10LF	B-36	YHSFQ18F25X03	B-70
YGIBS28-338-2N	E-28	YH3939WC	C-190, C-192	YHSA10K10RK	B-12	YHSFQ18F25X03RK	B-70
YGIBS28-400-2N	E-28	YH3939WCC	C-190, C-192	YHSA10K12	B-12	YHSQ10F25X03	B-69
YGIBS28-462-2N	E-28	YH4429	C-190, C-192	YHSA10K12RK	B-12	YHSQ10F25X03RK	B-69
YGIBS28-550-2N	E-28	YH4429WC	C-190, C-192	YHSA10K14	B-12	YHSQ10M25X03	B-68
YGIBS28-613-2N	E-28	YH4429WCC	C-190, C-192	YHSA10K14FRK	B-31	YHSQ10M25X03RK	B-68
YGIBS28-675-2N	E-28	YH4434	C-190, C-192	YHSA10K14RK	B-12	YHSQ14F11X02D	B-69
YGIBS34-338-2N	E-28	YH4434WC	C-190, C-192	YHSA10K38	B-12	YHSQ14F18X02D	B-69
YGIBS34-400-2N	E-28	YH4434WCC	C-190, C-192	YHSA10K38RK	B-12	YHSQ14F25X03	B-69
YGIBS34-462-2N	E-28	YH4444	C-190, C-192	YHSA10K516	B-12	YHSQ14F25X03RK	B-69
YGIBS34-550-2N	E-28	YH4444WC	C-190, C-192	YHSA10K6	B-12	YHSQ14M25X03	B-68
YGIBS34-675-2N	E-28	YH4444WCC	C-190, C-192	YHSA10K6BF	B-41	YHSQ14M25X03RK	B-68
YGIBW28-1000-2N	E-28	YH6C6C	C-190, C-192	YHSA10K6F	B-31	YHSQ18F11X02D	B-69
YGIBW28-338-2N	E-28	YH6C6CWC	C-190, C-192	YHSA10K6LF	B-36	YHSQ18F18X02D	B-69
YGIBW28-400-2N	E-28	YH6C6CWCC	C-190, C-192	YHSA10K8	B-12	YHSQ18F25X03	B-69
YGIBW28-462-2N	E-28	YH8C8C	C-190, C-192	YHSA10K8BF	B-41	YHSQ18F25X03RK	B-69
YGIBW28-550-2N	E-28	YH8C8CWC	C-190, C-192	YHSA10K8F	B-31	YHSQ18M25X03RK	B-68
YGIBW28-613-2N	E-28	YH8C8CWCC	C-190, C-192	YHSA10K8FRK	B-31	YHSQ18M25X03	B-68
YGIBW28-675-2N	E-28	YHD200	H-28, H-39	YHSA10K8LF	B-36	YHSS10	B-59
YGIBW28-750-2N	E-28	YHD-200	H-29	YHSA14K10	B-12	YHSS10RK	B-59
YGIBW34-338-2N	E-28	YHD200J1444	H-40	YHSA14K10BF	B-41	YHSS14	B-59
YGIBW34-400-2N	E-28	YHD250	H-28, H-39	YHSA14K10F	B-31	YHSS14RK	B-59
YGIBW34-462-2N	E-28	YHD-250	H-29	YHSA14K10FRK	B-31	YHSS18	B-59
YGIBW34-550-2N	E-28	YHD250J1444	H-40	YHSA14K10LF	B-36	YHSS18RK	B-59
YGIBW34-613-2N	E-28	YHD3	H-28	YHSA14K10RK	B-12	YKA25R-2N	H-35
YGIBW34-675-2N	E-28	YHD-3	H-31	YHSA14K14	B-12	YKA26-2N	H-37
YGL29C2	E-11	YHD300	H-28, H-39	YHSA14K14FRK	B-31	YKA26R-2N	H-35
YGL29C29	E-11	YHD-300	H-29	YHSA14K14RK	B-12	YKA27R-2N	H-35
YGL2C2	E-11	YHD300J1496	H-40	YHSA14K38	B-12	YKA28-2N	H-37
YGL34C2	E-11	YHD350	H-28, H-39	YHSA14K38RK	B-12	YKA28R-2N	H-35
YGL34C29	E-11	YHD-350	H-29	YHSA14K516	B-12	YKA2C-2N	H-37
YGL34C34	E-11	YHD350J1496	H-40	YHSA14K6	B-12	YKA2R-2N	H-35
YGLR29C100	E-12	YHD4	H-28	YHSA14K6BF	B-41	YKA30-2N	H-37
YGLR29C12	E-12	YHD-4	H-31	YHSA14K6F	B-31	YKA30R-2N	H-35
YGLR29C34	E-12	YHD400	H-28	YHSA14K6FRK	B-31	YKA321R-2N	H-35
YGLR29C58	E-12	YHD-400	H-29	YHSA14K6LF	B-36	YKA33R-2N	H-35
YGLR34C100	E-12	YHD5	H-28	YHSA14K8	B-12	YKA34-2N	H-37
YGLR34C12	E-12	YHD-5	H-31	YHSA14K8BF	B-41	YKA34CA-2N	H-35
YGLR34C34	E-12	YHD6	H-28	YHSA14K8F	B-31	YKA361R-2N	H-35
YGLR34C58	E-12	YHD-6	H-31	YHSA14K8FRK	B-31	YKA37R-2N	H-35
YGS25	E-25	YHD7	H-28	YHSA14K8LF	B-36	YKA391A-2N	H-35
YGS26	E-25	YHD-7	H-31	YHSA14K8RK	B-12	YKA44-2N	H-37
YGS28	E-25	YHN-450	H-30	YHSA18K10	B-12	YKA6C-2N	H-37
YGS29	E-25	YHN500	H-39	YHSA18K10BF	B-41	YM10-28	K-37
YGS2C	E-25	YHN-500	H-30	YHSA18K10F	B-31	YM10-34	K-37

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YM12-28.....	K-37	YNA56R.....	I-9, I-37	YNT39R39RHT.....	I-26	YNU54R.....	I-15, I-43
YM12-34.....	K-37	YNA56R15.....	I-9, I-37	YNT43R43R.....	I-13, I-42	YNU54RHT.....	I-28
YM4-28.....	K-37	YNA56R15H.....	I-3, I-4, I-29,	YNT43R43RHT.....	I-26	YNU56R.....	I-15, I-43
YM4-34.....	K-37		I-31, I-32	YNT451R451R.....	I-13, I-42	YNU56RHT.....	I-28
YM6-28.....	K-37	YNA56RT.....	I-10, I-38	YNT451R451RHT.....	I-26	YNU58R.....	I-15
YM6-34.....	K-37	YNA56RT15.....	I-10, I-38	YNT49R49R.....	I-13, I-42	YNU58RHT.....	I-28
YM8-28.....	K-37	YNA56RT15H.....	I-5, I-6, I-30	YNT49R49RHT.....	I-26	YNU594R.....	I-43
YM8-34.....	K-37	YNA58R.....	I-9, I-37	YNT52R52R.....	I-13, I-42	YNU595R.....	I-43
YNA32R.....	I-9, I-37	YNA58R15.....	I-9, I-37	YNT52R52RHT.....	I-26	YNU59R.....	I-15, I-43
YNA32R15.....	I-9, I-37	YNA58R15H.....	I-3, I-4, I-29,	YNT54R54R.....	I-42	YNU59RHT.....	I-28
YNA32R15H.....	I-3, I-4, I-29,		I-31, I-32	YNT56R56R.....	I-13, I-42	YOT3434.....	H-32
	I-31, I-32	YNA58RT.....	I-10, I-38	YNT56R56RHT.....	I-26	YOU32R.....	H-55
YNA32RT.....	I-10, I-38	YNA58RT15.....	I-10, I-38	YNT58R58R.....	I-13, I-42	YOU33R.....	H-55
YNA32RT15.....	I-10, I-38	YNA58RT15H.....	I-5, I-6, I-30	YNT58R58RHT.....	I-26	YOU35R.....	H-55
YNA32RT15H.....	I-5, I-6, I-30	YNA594R.....	I-37	YNT594R594R.....	I-42	YOU361R.....	H-55
YNA34R.....	I-9, I-37	YNA594R15.....	I-37	YNT59R59R.....	I-13, I-42	YOU37R.....	H-55
YNA34R15.....	I-9, I-37	YNA594R15H.....	I-29, I-31, I-32	YNT59R59RHT.....	I-26	YOU39R.....	H-55
YNA34R15H.....	I-3, I-4, I-29,	YNA594RT.....	I-38	YNTA245MRATACCC.....	I-51	YOU41R.....	H-55
	I-31, I-32	YNA594RT15.....	I-38	YNTA32R.....	I-14, I-41	YOU421R.....	H-55
YNA34RT.....	I-10, I-38	YNA594RT15H.....	I-30	YNTA32RHT.....	I-27	YOU43R.....	H-55
YNA34RT15.....	I-10, I-38	YNA59R.....	I-9, I-37	YNTA32RTACCC.....	I-51	YOU44R.....	H-55
YNA34RT15H.....	I-5, I-6, I-30	YNA59R15.....	I-9, I-37	YNTA34R.....	I-14, I-41	YOU453R.....	H-55
YNA36R.....	I-9, I-37	YNA59R15H.....	I-3, I-4, I-29,	YNTA34RHT.....	I-27	YOU45R.....	H-55
YNA36R15.....	I-9, I-37		I-31, I-32	YNTA36R.....	I-14, I-41	YOU48R.....	H-55
YNA36R15H.....	I-3, I-4, I-29,	YNA59RT.....	I-10, I-38	YNTA36RHT.....	I-27	YOU49R.....	H-55
	I-31, I-32	YNA59RT15.....	I-10, I-38	YNTA36RTACCC.....	I-51	YP25U25.....	H-24
YNA36RT.....	I-10, I-38	YNA59RT15H.....	I-5, I-6, I-30	YNTA39R.....	I-14, I-41	YP26AU2.....	H-24, H-39
YNA36RT15.....	I-10, I-38	YNA7M10T.....	I-44	YNTA39RHT.....	I-27	YP27AU2.....	H-24
YNA36RT15H.....	I-5, I-6, I-30	YNA7M6T.....	I-44	YNTA39RTACCC.....	I-51	YP27AU26.....	H-24, H-39
YNA39R.....	I-9, I-37	YNA7M7T.....	I-44	YNTA43R.....	I-14, I-41	YP27AU4.....	H-24, H-39
YNA39R15.....	I-9, I-37	YNA7M8T.....	I-44	YNTA43RHT.....	I-27	YP28C28.....	H-22
YNA39R15H.....	I-3, I-4, I-29,	YNM428.....	K-38	YNTA43RTACCC.....	I-51	YP28U2.....	H-24
	I-31, I-32	YNM434.....	K-38	YNTA451R.....	I-14, I-41	YP28U26.....	H-24, H-39
YNA39RT.....	I-10, I-38	YNM628.....	K-38	YNTA451RHT.....	I-27	YP28U28.....	H-24
YNA39RT15.....	I-10, I-38	YNM634.....	K-38	YNTA451RTACCC.....	I-51	YP29C26.....	H-22
YNA39RT15H.....	I-5, I-6, I-30	YNM828.....	K-38	YNTA49R.....	I-14, I-41	YP2C2.....	H-22
YNA43R.....	I-9, I-37	YNM834.....	K-38	YNTA49RHT.....	I-27	YP2U3.....	H-24, H-39
YNA43R15.....	I-9, I-37	YNS32R.....	I-11, I-39	YNTA49RTACCC.....	I-51	YPC25L13.....	C-217
YNA43R15H.....	I-3, I-4, I-29,	YNS32RT.....	I-12, I-40	YNTA52RTACCC.....	I-51	YPC25L20.....	C-217
	I-31, I-32	YNS34R.....	I-11, I-39	YNTA54R.....	I-14, I-41	YPC25L27.....	C-217
YNA43RT.....	I-10, I-38	YNS34RT.....	I-12, I-40	YNTA54RHT.....	I-27	YPC25L34.....	C-217
YNA43RT15.....	I-10, I-38	YNS36R.....	I-11, I-39	YNTA56R.....	I-14, I-41	YPC25L41.....	C-217
YNA43RT15H.....	I-5, I-6, I-30	YNS36RT.....	I-12, I-40	YNTA56RHT.....	I-27	YPC26R8U.....	H-26
YNA451R.....	I-9, I-37	YNS39R.....	I-11, I-39	YNTA58R.....	I-14, I-41	YPC28L13.....	C-217
YNA451R15.....	I-9, I-37	YNS39RT.....	I-12, I-40	YNTA58RHT.....	I-27	YPC28L20.....	C-217
YNA451R15H.....	I-3, I-4, I-29,	YNS43R.....	I-11, I-39	YNTA594R.....	I-41	YPC28L27.....	C-217
	I-31, I-32	YNS43RT.....	I-12, I-40	YNTA59R.....	I-14, I-41	YPC28L34.....	C-217
YNA451RT.....	I-10, I-38	YNS451R.....	I-11, I-39	YNTA59RHT.....	I-27	YPC28L41.....	C-217
YNA451RT15.....	I-10, I-38	YNS451RT.....	I-12, I-40	YNU245MRACCC.....	I-52	YPC28R28A.....	H-25
YNA451RT15H.....	I-5, I-6, I-30	YNS49R.....	I-11, I-39	YNU32R.....	I-15, I-43	YPC28U26.....	H-25, H-39
YNA49R.....	I-9, I-37	YNS49RT.....	I-12, I-40	YNU32RACCC.....	I-52	YPC28U28.....	H-25
YNA49R15.....	I-9, I-37	YNS52R.....	I-11, I-39	YNU32RHT.....	I-28	YPC28U4.....	H-25, H-39
YNA49R15H.....	I-3, I-4, I-29,	YNS52RT.....	I-12, I-40	YNU34R.....	I-15, I-43	YPC29C26.....	K-75
	I-31, I-32	YNS54R.....	I-39	YNU34RHT.....	I-28	YPC2A8U.....	H-26
YNA49RT.....	I-10, I-38	YNS54RT.....	I-40	YNU36R.....	I-15, I-43	YPC31L13.....	C-217
YNA49RT15.....	I-10, I-38	YNS56R.....	I-11, I-39	YNU36RACCC.....	I-52	YPC31L20.....	C-217
YNA49RT15H.....	I-5, I-6, I-30	YNS56RT.....	I-12, I-40	YNU36RHT.....	I-28	YPC31L27.....	C-217
YNA52R.....	I-9, I-37	YNS58R.....	I-11, I-39	YNU39R.....	I-15, I-43	YPC31L34.....	C-217
YNA52R15.....	I-9, I-37	YNS58RT.....	I-12, I-40	YNU39RACCC.....	I-52	YPC31L41.....	C-217
YNA52R15H.....	I-3, I-4, I-29,	YNS594R.....	I-39	YNU39RHT.....	I-28	YPC33R26U.....	H-25, H-39
	I-31, I-32	YNS594RT.....	I-40	YNU43R.....	I-15, I-43	YPC33R28R.....	H-25
YNA52RT.....	I-10, I-38	YNS59R.....	I-11, I-39	YNU43RACCC.....	I-52	YPC33R33R.....	H-25
YNA52RT15.....	I-10, I-38	YNS59RT.....	I-12, I-40	YNU43RHT.....	I-28	YPC34L13.....	C-217
YNA52RT15H.....	I-5, I-6, I-30	YNT32R32R.....	I-13, I-42	YNU451R.....	I-15, I-43	YPC34L20.....	C-217
YNA54R.....	I-37	YNT32R32RHT.....	I-26	YNU451RACCC.....	I-52	YPC34L27.....	C-217
YNA54R15.....	I-37	YNT34R34R.....	I-13, I-42	YNU451RHT.....	I-28	YPC34L34.....	C-217
YNA54R15H.....	I-29, I-31, I-32	YNT34R34RHT.....	I-26	YNU49R.....	I-15, I-43	YPC34L41.....	C-217
YNA54RT.....	I-38	YNT36R36R.....	I-13, I-42	YNU49RACCC.....	I-52	YPC36A32.....	H-25
YNA54RT15.....	I-38	YNT36R36RHT.....	I-26	YNU49RHT.....	I-28	YPC36A36.....	H-25
YNA54RT15H.....	I-30	YNT39R39R.....	I-13, I-42	YNU52RACCC.....	I-52	YPC38R26U.....	H-25

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YPC39L13.....	C-218	YRV4CV6C-L.....	B-58	YS31AT.....	C-210	YS8C.....	C-147
YPC39L20.....	C-218	YRV6CV10-L.....	B-58	YS31-FXB.....	C-155	YS8CA1.....	C-209
YPC39L27.....	C-218	YRV6CV8C-L.....	B-58	YS31-L.....	C-145	YS8C-FXB.....	C-155
YPC39L34.....	C-218	YRV8CV10-L.....	B-58	YS31LTCKITC.....	C-157	YS8CFXLTCKITC.....	C-157
YPC39L41.....	C-218	YRV8CV14-L.....	B-58	YS31-T.....	C-153	YS8C-LB.....	C-149, C-150
YPC40A32.....	H-25	YS10WAG1.....	C-209	YS32.....	C-147	YS8C-L-BOX.....	C-145
YPC40A36.....	H-25	YS12AG1.....	C-209	YS32A1.....	C-209	YSA25R-2N.....	H-36
YPC40A40.....	H-25	YS1C.....	C-147	YS32-FXB.....	C-155	YSA26R-2N.....	H-36
YPC44L13.....	C-218	YS1CA1.....	C-209	YS32-L.....	C-145	YSA28R-2N.....	H-36
YPC44L20.....	C-218	YS1C-LB.....	C-149, C-150	YS32-LB.....	C-149, C-150	YSA2R-2N.....	H-36
YPC44L27.....	C-218	YS1C-LBOX.....	C-145	YS34.....	C-147	YSA30R-2N.....	H-36
YPC44L34.....	C-218	YS1C-T.....	C-153	YS34A1.....	C-209	YSA321R-2N.....	H-36
YPC44L41.....	C-218	YS25.....	C-147	YS34AT.....	C-210	YSA37R-2N.....	H-36
YQE-91.....	B-94	YS25A1.....	C-209	YS34-FXB.....	C-155	YSCM104.....	B-57, C-144
YR2C2WT.....	C-147	YS25AT.....	C-210	YS34FXLTCKITC.....	C-157	YSCM133.....	B-57, C-144
YRA1CU-1.....	H-80	YS25FXLTCKITC.....	C-157	YS34-L.....	C-145	YSCM167.....	B-57, C-144
YRA25A-1.....	H-80	YS25-LB.....	C-149, C-150	YS34-LB.....	C-149, C-151	YSCM17.....	B-57, C-144
YRA25U.....	H-80	YS25-LBOX.....	C-145	YS34LTCKITC.....	C-157	YSCM212.....	B-57, C-144
YRA26U.....	H-80	YS25LTCKITC.....	C-157	YS34-T.....	C-153	YSCM231.....	B-57, C-144
YRA27U.....	H-80	YS25-T.....	C-153	YS36.....	C-147	YSCM27.....	B-57, C-144
YRA28U.....	H-80	YS25UCG1.....	K-69	YS36A1.....	C-209	YSCM42.....	B-57, C-144
YRA4CU-1.....	H-80	YS26.....	C-147	YS36-FXB.....	C-155	YSCM66.....	B-57, C-144
YRA6CU-1.....	H-80	YS26A1.....	C-209	YS36-L.....	C-145	YSCM80.....	B-57, C-144
YRA8CU-1.....	H-80	YS26AT.....	C-210	YS36-LB.....	C-149, C-151	YSD25R25R.....	H-48
YRAL1CU.....	H-80	YS26FXLTCKITC.....	C-157	YS38-FXB.....	C-155	YSD26R25R.....	H-48
YRAL4CU.....	H-80	YS26-LB.....	C-149, C-150	YS38FXLTCKITC.....	C-157	YSD26R26R.....	H-48
YRB1CU1TTN.....	K-70	YS26-LBOX.....	C-145	YS38-L.....	C-145	YSD26R2R.....	H-48
YRB1CU2TTN.....	K-70	YS26LTCKITC.....	C-157	YS38-LB.....	C-149, C-151	YSD26R2W.....	H-48
YRB25U2.....	C-211	YS26-T.....	C-153	YS39.....	C-147	YSD27R25R.....	H-48
YRB25U25TTN.....	K-70	YS26UCG1.....	K-69	YS39A1.....	C-209	YSD27R26R.....	H-48
YRB25U2TTN.....	K-70	YS27.....	C-147	YS39AM1.....	C-209	YSD27R27R.....	H-48
YRB25U3TTN.....	K-70	YS27A1.....	C-209	YS39AT.....	C-210	YSD27R2R.....	H-48
YRB27U25.....	C-211	YS27AT.....	C-210	YS39-L.....	C-145	YSD27R2W.....	H-48
YRB27U25TW.....	K-70	YS27-LB.....	C-149, C-150	YS39-LB.....	C-149, C-151	YSD28R25R.....	H-48
YRB27U26.....	C-211	YS27-LBOX.....	C-145	YS39LTCKITC.....	C-157	YSD28R26R.....	H-48
YRB2825T.....	K-73	YS27UCG1.....	K-69	YS39-T.....	C-153	YSD28R27R.....	H-48
YRB28U1TW.....	K-70	YS28.....	C-147	YS3C.....	C-147	YSD28R28R.....	H-48
YRB28U25TW.....	K-70	YS28A1.....	C-209	YS3C-L.....	C-145	YSD28R2R.....	H-48
YRB28U26.....	C-211	YS28AT.....	C-210	YS3C-LB.....	C-149, C-150	YSD28R2W.....	H-48
YRB28U26TW.....	K-70	YS28-LB.....	C-149, C-150	YS40-FXB.....	C-155	YSE10.....	B-50
YRB28U28TW.....	K-70	YS28-LBOX.....	C-145	YS40-LB.....	C-149, C-151	YSE10-BOX.....	B-50
YRB28U3TW.....	K-70	YS28LTCKITC.....	C-157	YS42A1.....	C-209	YSE10HHS.....	B-51
YRB29U28.....	C-211	YS28-T.....	C-153	YS44.....	C-147	YSE10HN.....	B-48
YRB2U3TTN.....	K-70	YS28UCG1.....	K-69	YS44A1.....	C-209	YSE14H.....	B-50
YRB2U4.....	C-211	YS29.....	C-147	YS44AT.....	C-210	YSE14H-BOX.....	B-50
YRB31U25TW.....	K-70	YS29A1.....	C-209	YS44-FXB.....	C-155	YSE14HHS.....	B-51
YRB31U28.....	C-211	YS29AT.....	C-210	YS44FXLTCKITC.....	C-157	YSE14HN.....	B-48
YRB31U28TW.....	K-70	YS29FXLTCKITC.....	C-157	YS44-L.....	C-145	YSE18H.....	B-50
YRB31U29.....	C-211	YS29-LB.....	C-149, C-150	YS44-LB.....	C-149, C-151	YSE18H-BOX.....	B-50
YRB31U31TW.....	K-70	YS29-LBOX.....	C-145	YS45A1.....	C-209	YSE18HHS.....	B-51
YRB3428T.....	K-73	YS29-T.....	C-153	YS46.....	C-147	YSE18HN.....	B-48
YRB34U25TW.....	K-71	YS2C.....	C-147	YS46A1.....	C-209	YSES10K.....	B-52
YRB34U28TW.....	K-71	YS2CA1.....	C-209	YS47A1.....	C-209	YSES14K.....	B-52
YRB34U29TW.....	K-71	YS2CAT.....	C-210	YS48.....	C-147	YSES18K.....	B-52
YRB34U30TW.....	K-71	YS2CFXLTCKITC.....	C-157	YS483A1.....	C-209	YSF28CP.....	K-41
YRB34U31.....	C-211	YS2C-LB.....	C-149, C-150	YS48A1.....	C-209	YSH2929.....	C-197
YRB34U31TW.....	K-71	YS2C-LBOX.....	C-145	YS4C.....	C-147	YSH3429.....	C-197
YRB34U34TW.....	K-71	YS2CLTCKITC.....	C-157	YS4CA1.....	C-209	YSH3434.....	C-197
YRB36U31.....	C-211	YS2C-T.....	C-153	YS4CFXLTCKITC.....	C-157	YSH3931.....	C-197
YRB36U34.....	C-211	YS2UCG1.....	K-69	YS4C-LB.....	C-149, C-150	YSH3939.....	C-197
YRB39U31TW.....	K-71	YS30.....	C-147	YS4C-LBOX.....	C-145	YSHG3429.....	E-18
YRB39U34.....	C-211	YS30A1.....	C-209	YS4C-T.....	C-153	YSHG3434.....	E-18
YRB39U34TW.....	K-71	YS30AT.....	C-210	YS5C.....	C-147	YSHG3931.....	E-18
YRB39U36.....	C-211	YS30-FXB.....	C-155	YS5C-LB.....	C-149, C-150	YSHG4429.....	E-18
YRB39U39TW.....	K-71	YS30-L.....	C-145	YS5C-LBOX.....	C-145	YSM10.....	B-56
YRB44U31TW.....	K-71	YS30-LB.....	C-149, C-150	YS6C.....	C-147	YSM14.....	B-56
YRB44U34TW.....	K-71	YS30-T.....	C-153	YS6CA1.....	C-209	YSM18.....	B-56
YRB44U39TW.....	K-71	YS31.....	C-147	YS6CFXLTCKITC.....	C-157	YSM1C.....	B-56
YRB44U44TW.....	K-71	YS31A1.....	C-209	YS6C-LBOX.....	C-145	YSM25.....	B-56
YRV2CV6C-L.....	B-58	YS31ACG1.....	K-69	YS6C-T.....	C-153	YSM26.....	B-56

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YSM27.....	B-56	YSR3428LTCKITC.....	C-160, C-167	YSR44FX34TCKITC.....	C-177, C-179	YSV26-LBOX.....	B-54
YSM28.....	B-56	YSR3428TCKITC.....	C-177, C-179	YSR44FX38FXKITC.....	C-183, C-184	YSV27-FXB.....	C-155
YSM2C.....	B-56	YSR3429FXKITC.....	C-183, C-184	YSR44FX38FXLKITC.....	C-173, C-174	YSV27L.....	B-54
YSM4C.....	B-56	YSR3429FXLKITC.....	C-173, C-175	YSR44FX39LTCKITC.....	C-159, C-166	YSV27-LBOX.....	B-54
YSM6C.....	B-56	YSR3429FXLTCKITC.....	C-160, C-167	YSR44FX39LTCKITC.....	C-159, C-166	YSV28-FXB.....	C-155
YSM8C.....	B-56	YSR3431LTCKITC.....	C-160, C-167	YSR44FX39TCKITC.....	C-177, C-179	YSV28L.....	B-54
YSP1C-T.....	C-153	YSR3431TCKITC.....	C-177, C-179	YSR4CFX10CLTCKITC.....	C-164, C-170	YSV28-LBOX.....	B-54
YSP25-T.....	C-153	YSR3434FXKITC.....	C-183, C-184	YSR4CFX6CFXLTCKITC.....	C-164, C-170	YSV2C-FXB.....	C-155
YSP26-T.....	C-153	YSR3434FXLKITC.....	C-173, C-175	YSR4CFX6CFXTCKITC.....	C-178, C-181	YSV2CL.....	B-54
YSP28-T.....	C-153	YSR3434FXLTCKITC.....	C-160, C-167	YSR4CFX8CFXLTCKITC.....	C-164, C-170	YSV2C-LBOX.....	B-54
YSP29-T.....	C-153	YSR34FX25FXLTCKITC.....	C-161, C-168	YSR6CFX10CLTCKITC.....	C-164, C-171	YSV4C-FXB.....	C-155
YSP2C-T.....	C-153	YSR34FX25FXTKITC.....	C-177, C-179	YSR6CFX14CLTCKITC.....	C-164, C-171	YSV4CL.....	B-54
YSP30-T.....	C-153	YSR34FX26FXLTCKITC.....	C-161, C-168	YSR6CFX8CFXLTCKITC.....	C-164, C-171	YSV4C-LBOX.....	B-54
YSP31-T.....	C-153	YSR34FX28FXLTCKITC.....	C-161, C-168	YSR8CFX10CLTCKITC.....	C-165, C-171	YSV6C-FXB.....	C-155
YSP34-T.....	C-153	YSR34FX28FXTKITC.....	C-177, C-179	YSR8CFX14CLTCKITC.....	C-165, C-171	YSV6CL.....	B-54
YSP39-T.....	C-153	YSR34FX28LTCKITC.....	C-161, C-168	YSS2R.....	H-49	YSV6C-LBOX.....	B-54
YSP4C-T.....	C-153	YSR34FX28TCKITC.....	C-177, C-179	YSS4R.....	H-49	YSV8CL.....	B-54
YSR10CFX12CLTCKITC.....	C-165, C-171	YSR34FX29FXKITC.....	C-183, C-184	YSS6R.....	H-49	YSV8C-LBOX.....	B-54
YSR10CFX14CLTCKITC.....	C-165, C-171	YSR34FX29FXLKITC.....	C-173, C-175	YSS6RG2.....	H-49	YTA25R-2N.....	H-34
YSR25FX2CFXLTCKITC.....	C-163, C-170	YSR34FX29FXLTCKITC.....	C-161, C-168	YST2525.....	C-198	YTA26-2N.....	H-36
YSR25FX4CFXLTCKITC.....	C-163, C-170	YSR34FX2CFXLTCKITC.....	C-161, C-168	YST2626.....	C-198	YTA26R-2N.....	H-34
YSR25FX6CFXLTCKITC.....	C-163, C-170	YSR34FX31LTCKITC.....	C-160, C-168	YST2825.....	C-198	YTA27R-2N.....	H-34
YSR25FX6CFXTCKITC.....	C-178, C-181	YSR34FX4CFXLTCKITC.....	C-161, C-168	YST2828.....	C-198	YTA28-2N.....	H-36
YSR25FX6CFXLTCKITC.....	C-164, C-170	YSR34FX6CFXLTCKITC.....	C-161, C-168	YST282C.....	C-198	YTA28R-2N.....	H-34
YSR26FX25FXLTCKITC.....	C-163, C-170	YSR38FX26FXLTCKITC.....	C-160, C-167	YST2929.....	C-198	YTA2C-2N.....	H-36
YSR26FX2CFXLTCKITC.....	C-163, C-170	YSR38FX28FXLTCKITC.....	C-160, C-167	YST2C2C.....	C-198	YTA2R-2N.....	H-34
YSR26FX4CFXLTCKITC.....	C-163, C-170	YSR38FX28LTCKITC.....	C-160, C-167	YST3131.....	C-198	YTA321R-2N.....	H-34
YSR26FX6CFXLTCKITC.....	C-163, C-170	YSR38FX28TCKITC.....	C-177, C-179	YST3428.....	C-198	YTA33R-2N.....	H-34
YSR26FX6CFXTCKITC.....	C-178, C-181	YSR38FX29FXKITC.....	C-183, C-184	YST3434.....	C-198	YTA34-2N.....	H-36
YSR2825FXLTCKITC.....	C-162, C-169	YSR38FX29FXLKITC.....	C-173, C-174	YST3939.....	C-198	YTA361R-2N.....	H-34
YSR2825FXTKITC.....	C-178, C-180	YSR38FX29FXLTCKITC.....	C-160, C-167	YST4C4C.....	C-198	YTA37R-2N.....	H-34
YSR282CFXLTCKITC.....	C-162, C-169	YSR38FX29LTCKITC.....	C-160, C-167	YSU25A25A.....	H-47	YTA391A-2N.....	H-34
YSR282CFXTKITC.....	C-178, C-180	YSR38FX30LTCKITC.....	C-160, C-167	YSU25R25R.....	H-47	YTA39R-2N.....	H-34
YSR284CFXLTCKITC.....	C-162, C-169	YSR38FX31LTCKITC.....	C-160, C-167	YSU25R2R.....	H-47	YTA43R-2N.....	H-34
YSR286CFXLTCKITC.....	C-162, C-169	YSR38FX31TCKITC.....	C-177, C-179	YSU25R2W.....	H-47	YTS245MRAC5.....	I-49
YSR286CFXTCKITC.....	C-178, C-180	YSR38FX34FXKITC.....	C-183, C-184	YSU25R4W.....	H-47	YTS301A.....	I-33
YSR28FX25FXLTCKITC.....	C-163, C-169	YSR38FX34FXLKITC.....	C-173, C-174	YSU25R6W.....	H-47	YTS301AT.....	I-35
YSR28FX26FXLTCKITC.....	C-163, C-169	YSR38FX34FXLTCKITC.....	C-160, C-167	YSU2R2R.....	H-47	YTS311A.....	I-33
YSR28FX28LTCKITC.....	C-163, C-169	YSR38FX34LTCKITC.....	C-160, C-167	YSU2R2W.....	H-47	YTS311AT.....	I-35
YSR28FX2CFXLTCKITC.....	C-163, C-169	YSR3928FXLTCKITC.....	C-159, C-166	YSU2R4W.....	H-47	YTS312E.....	I-46
YSR28FX4CFXLTCKITC.....	C-163, C-169	YSR3928LTCKITC.....	C-159, C-166	YSU2R6W.....	H-47	YTS32AR.....	I-34
YSR29FX25FXLTCKITC.....	C-162, C-169	YSR3928TCKITC.....	C-177, C-179	YSU2R8W.....	H-47	YTS32ART.....	I-36
YSR29FX25FXTKITC.....	C-178, C-180	YSR3929FXKITC.....	C-183, C-184	YSU2W2W.....	H-47	YTS32R33RS.....	I-7
YSR29FX28LTCKITC.....	C-162, C-169	YSR3929FXLKITC.....	C-173, C-174	YSU2W4W.....	H-47	YTS32R34RS.....	I-7
YSR29FX2CFXLTCKITC.....	C-162, C-169	YSR3929FXLTCKITC.....	C-159, C-166	YSU2W6W.....	H-47	YTS32R34RSH.....	I-20
YSR29FX2CFXTCKITC.....	C-178, C-180	YSR3929LTCKITC.....	C-159, C-166	YSU2W8W.....	H-47	YTS32RT33RS.....	I-8
YSR2CFX4CFXLTCKITC.....	C-164, C-170	YSR3930LTCKITC.....	C-159, C-166	YSU4W4W.....	H-47	YTS32RT33RSH.....	I-21
YSR2CFX6CFXLTCKITC.....	C-164, C-170	YSR3931LTCKITC.....	C-159, C-166	YSU4W6W.....	H-47	YTS32RT34RS.....	I-8
YSR2CFX6CFXTCKITC.....	C-178, C-181	YSR3931TCKITC.....	C-177, C-179	YSU4W8W.....	H-47	YTS32RT34RSH.....	I-21
YSR2CFX8CFXLTCKITC.....	C-164, C-170	YSR3934FXKITC.....	C-183, C-184	YSU6W6W.....	H-47	YTS32RTACCC2.....	I-49
YSR3125FXLTCKITC.....	C-161, C-168	YSR3934FXLKITC.....	C-173, C-174	YSV1014-G2.....	B-58	YTS330MRAC5.....	I-49
YSR3125FXTKITC.....	C-177, C-180	YSR3934FXLTCKITC.....	C-159, C-166	YSV10BBOX.....	B-46	YTS331A.....	I-33
YSR3126FXLTCKITC.....	C-161, C-168	YSR3934LTCKITC.....	C-159, C-166	YSV10BOX.....	B-53	YTS331AT.....	I-35
YSR3128FXLTCKITC.....	C-161, C-168	YSR3938FXKITC.....	C-183, C-184	YSV10-HBOX.....	B-55	YTS34R34RS.....	I-7
YSR3128LTCKITC.....	C-161, C-168	YSR3938FXLKITC.....	C-173, C-174	YSV1214-G1.....	B-58	YTS34R34RSH.....	I-20
YSR3128TCKITC.....	C-177, C-180	YSR3938FXLTCKITC.....	C-159, C-166	YSV1418.....	B-58	YTS34RT34RS.....	I-8
YSR3129FXKITC.....	C-183, C-184	YSR3939LTCKITC.....	C-159, C-166	YSV14BBOX.....	B-46	YTS34RT34RSH.....	I-21
YSR3129FXLKITC.....	C-173, C-175	YSR44FX28FXLTCKITC.....	C-159, C-166	YSV14BOX.....	B-53	YTS351A.....	I-33
YSR3129FXLTCKITC.....	C-161, C-168	YSR44FX28LTCKITC.....	C-159, C-166	YSV14-HBOX.....	B-55	YTS351AT.....	I-35
YSR312CFXLTCKITC.....	C-162, C-168	YSR44FX29FXKITC.....	C-183, C-184	YSV18BBOX.....	B-46	YTS361A.....	I-33
YSR312CFXTCKITC.....	C-177, C-180	YSR44FX29FXLKITC.....	C-173, C-174	YSV18BOX.....	B-53	YTS361AT.....	I-35
YSR314CFXLTCKITC.....	C-162, C-168	YSR44FX29FXLTCKITC.....	C-159, C-166	YSV18-HBOX.....	B-55	YTS36R362RS.....	I-7
YSR316CFXLTCKITC.....	C-162, C-168	YSR44FX29LTCKITC.....	C-159, C-166	YSV1C-FXB.....	C-155	YTS36R362RSH.....	I-20
YSR32FX28FXLTCKITC.....	C-162, C-169	YSR44FX30LTCKITC.....	C-159, C-166	YSV1CL.....	B-54	YTS36R36RS.....	I-7
YSR32FX28FXTKITC.....	C-178, C-180	YSR44FX31LTCKITC.....	C-159, C-166	YSV1C-LBOX.....	B-54	YTS36R36RSH.....	I-20
YSR32FX29FXLTCKITC.....	C-162, C-169	YSR44FX31TCKITC.....	C-177, C-179	YSV25-FXB.....	C-155	YTS36RT362RS.....	I-8
YSR32FX29FXTKITC.....	C-178, C-180	YSR44FX34FXKITC.....	C-183, C-184	YSV25L.....	B-54	YTS36RT362RSH.....	I-21
YSR3425FXLTCKITC.....	C-160, C-167	YSR44FX34FXLKITC.....	C-173, C-174	YSV25-LBOX.....	B-54	YTS36RT36RS.....	I-8
YSR3425FXTKITC.....	C-177, C-179	YSR44FX34FXLTCKITC.....	C-159, C-166	YSV26-FXB.....	C-155	YTS36RT36RSH.....	I-21
YSR3426FXLTCKITC.....	C-160, C-167	YSR44FX34LTCKITC.....	C-159, C-166	YSV26L.....	B-54	YTS36RTACCC2.....	I-49

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YTS375E.....	H-67, I-46	YTS49RT483RSHT.....	I-21	YTU321R2R.....	H-33	YTW34RD34REKHT.....	I-17
YTS391A.....	I-33	YTS49RT48RS.....	I-8	YTU321R321R.....	H-33	YTW34RDHT.....	I-17
YTS391AT.....	I-35	YTS49RT48RSHT.....	I-21	YTU33R26R.....	H-33	YTW34RDT.....	I-6
YTS39A.....	I-33	YTS500E.....	I-46	YTU33R28R.....	H-33	YTW34RDT34REK.....	I-6
YTS39AR.....	I-34	YTS51AR.....	I-34	YTU33R33R.....	H-33	YTW34RDT34REKHT.....	I-19
YTS39ART.....	I-36	YTS51ART.....	I-36	YTW245MRE15ACK6.....	I-47	YTW34RDTH.....	I-19
YTS39AT.....	I-35	YTS52R48RS.....	I-7	YTW245MRED15ACK6.....	I-47	YTW34RE.....	I-3, I-4, I-5, I-6
YTS39R43RS.....	I-7	YTS52R48RSHT.....	I-20	YTW301A.....	I-29	YTW34REHT.....	I-16, I-17, I-18, I-19
YTS39R43RSHT.....	I-20	YTS52R521RS.....	I-7	YTW301A331AEK.....	I-29	YTW34RHT.....	I-16
YTS39RT43RS.....	I-8	YTS52R521RSHT.....	I-20	YTW301AD.....	I-31	YTW34RT.....	I-5
YTS39RT43RSHT.....	I-21	YTS52R59RS.....	I-7	YTW301ADT.....	I-32	YTW34RT34REK.....	I-5
YTS39RTACCC2.....	I-49	YTS52R59RSHT.....	I-20	YTW301ADT331AEK.....	I-32	YTW34RT34REKHT.....	I-18
YTS431A.....	I-33	YTS52RT48RS.....	I-8	YTW301AT.....	I-30	YTW34RTH.....	I-18
YTS431AT.....	I-35	YTS52RT48RSHT.....	I-21	YTW301AT331AEK.....	I-30	YTW351A.....	I-29
YTS438E.....	H-67, I-46	YTS52RT521RS.....	I-8	YTW301AT331AEK.....	I-30	YTW351A351AEK.....	I-29
YTS43R43RS.....	I-7	YTS52RT521RSHT.....	I-21	YTW311A.....	I-29	YTW351AD.....	I-31
YTS43R43RSHT.....	I-20	YTS52RT59RS.....	I-8	YTW311AD.....	I-31	YTW351AD351AEK.....	I-31
YTS43RT43RS.....	I-8	YTS52RT59RSHT.....	I-21	YTW311ADT.....	I-32	YTW351ADT.....	I-32
YTS43RT43RSHT.....	I-21	YTS52RTACCC2.....	I-49	YTW311ADT331AEK.....	I-32	YTW351ADT351AEK.....	I-32
YTS43RTACCC2.....	I-49	YTS52RTACCC5.....	I-49	YTW311AT.....	I-30	YTW351AE.....	I-29, I-30, I-31, I-32
YTS445A.....	I-33	YTS54959RSHT.....	I-20	YTW311AT331AEK.....	I-30	YTW351AT.....	I-30
YTS445AT.....	I-35	YTS549R521RS.....	I-7	YTW32R.....	I-3	YTW351T351AEK.....	I-30
YTS451A.....	I-33	YTS549R521RSHT.....	I-20	YTW32R33REK.....	I-3	YTW361A.....	I-29
YTS451AR.....	I-34	YTS549R549RS.....	I-7	YTW32R33REKHT.....	I-16	YTW361A39AEK.....	I-29
YTS451ART.....	I-36	YTS549R549RSHT.....	I-20	YTW32R34REK.....	I-3	YTW361AD.....	I-31
YTS451AT.....	I-35	YTS549R59RS.....	I-7	YTW32R34REKHT.....	I-16	YTW361AD39AEK.....	I-31
YTS451R449RS.....	I-7	YTS549RT521RS.....	I-8	YTW32RD.....	I-4	YTW361ADT.....	I-32
YTS451R449RSHT.....	I-20	YTS549RT521RSHT.....	I-21	YTW32RD33REK.....	I-4	YTW361ADT39AEK.....	I-32
YTS451R481RS.....	I-7	YTS549RT549RS.....	I-8	YTW32RD33REKHT.....	I-17	YTW361AT.....	I-30
YTS451R481RSHT.....	I-20	YTS549RT549RSHT.....	I-21	YTW32RD34REK.....	I-17	YTW361AT39AEK.....	I-30
YTS451R48RS.....	I-7	YTS549RT59RS.....	I-8	YTW32RD34REKHT.....	I-17	YTW362RE.....	I-3, I-4, I-5, I-6
YTS451R48RSHT.....	I-20	YTS549RT59RSHT.....	I-21	YTW32RDHT.....	I-17	YTW362REHT.....	I-16, I-17, I-18, I-19
YTS451RT449RS.....	I-8	YTS55AR.....	I-34	YTW32RDT.....	I-6	YTW36R.....	I-3
YTS451RT449RSHT.....	I-21	YTS55ART.....	I-36	YTW32RDT33REK.....	I-6	YTW36R362REK.....	I-3
YTS451RT481RS.....	I-8	YTS56R59RS.....	I-7	YTW32RDT33REKHT.....	I-19	YTW36R362REKHT.....	I-16
YTS451RT481RSHT.....	I-21	YTS56R59RSHT.....	I-20	YTW32RDT34REK.....	I-6	YTW36R36REK.....	I-3
YTS451RT48RS.....	I-7	YTS56RT59RS.....	I-8	YTW32RDT34REKHT.....	I-19	YTW36R36REKHT.....	I-16
YTS451RT48RSHT.....	I-20	YTS56RT59RSHT.....	I-21	YTW32RDTH.....	I-19	YTW36RD.....	I-4
YTS451RTACCC2.....	I-49	YTS570MRTAC5.....	I-49	YTW32RED15ACCCCK4.....	I-47	YTW36RD362REK.....	I-4
YTS457A.....	I-33	YTS58R48RS.....	I-7	YTW32RED15ACCCCK4.....	I-47	YTW36RD362REKHT.....	I-17
YTS457AT.....	I-35	YTS58R48RSHT.....	I-20	YTW32RHT.....	I-16	YTW36RD36REK.....	I-4
YTS463A.....	I-33	YTS58RT48RS.....	I-8	YTW32RT.....	I-5	YTW36RD36REKHT.....	I-17
YTS463AT.....	I-35	YTS58RT48RSHT.....	I-21	YTW32RT33REK.....	I-5	YTW36RD36REKHT.....	I-17
YTS470MRTAC5.....	I-49	YTS592AR.....	I-34	YTW32RT33REKHT.....	I-18	YTW36RDHT.....	I-6
YTS47A.....	I-33	YTS592ART.....	I-36	YTW32RT34REK.....	I-5	YTW36RDT.....	I-6
YTS47AT.....	I-35	YTS59AR.....	I-34	YTW32RT34REKHT.....	I-18	YTW36RDT362REK.....	I-6
YTS484A.....	I-33	YTS59ART.....	I-36	YTW32RT34REKHT.....	I-18	YTW36RDT362REKHT.....	I-19
YTS484AT.....	I-35	YTS59R521RS.....	I-7	YTW32RTH.....	I-18	YTW36RDT36REK.....	I-6
YTS486A.....	I-33	YTS59R521RSHT.....	I-20	YTW330MRE15ACK5.....	I-47	YTW36RDT36REKHT.....	I-19
YTS486AT.....	I-35	YTS59R59RS.....	I-7	YTW330MRED15ACK5.....	I-47	YTW36RDT36REKHT.....	I-19
YTS48A.....	I-33	YTS59R59RSHT.....	I-20	YTW331A.....	I-29	YTW36RDT36REK.....	I-6
YTS48AR.....	I-34	YTS59RT521RS.....	I-8	YTW331A331AEK.....	I-29	YTW36RDT36REKHT.....	I-19
YTS48ART.....	I-36	YTS59RT521RSHT.....	I-21	YTW331AD.....	I-31	YTW36RDTH.....	I-19
YTS48AT.....	I-35	YTS59RT59RS.....	I-8	YTW331AD331AEK.....	I-31	YTW36RE.....	I-3, I-4, I-5, I-6
YTS48R481RS.....	I-7	YTS59RT59RSHT.....	I-21	YTW331ADT.....	I-32	YTW36RE15ACCCCK4.....	I-47
YTS48R481RSHT.....	I-20	YTS610MRTAC5.....	I-49	YTW331ADT331AEK.....	I-32	YTW36RED15ACCCCK4.....	I-47
YTS48R48RS.....	I-7	YTS690MRTAC5.....	I-49	YTW331AE.....	I-29, I-30, I-31, I-32	YTW36REHT.....	I-16, I-17, I-18, I-19
YTS48R48RSHT.....	I-20	YTS710MRTAC5.....	I-49	YTW331AT.....	I-30	YTW36RHT.....	I-16
YTS48RT481RS.....	I-8	YTS760MRTAC5.....	I-49	YTW331AT331AEK.....	I-30	YTW36RT.....	I-5
YTS48RT481RSHT.....	I-21	YTTAG388.....	E-30	YTW33RE.....	I-3, I-4, I-5, I-6	YTW36RT362REK.....	I-5
YTS48RT48RS.....	I-8	YTU25R25R.....	H-33	YTW33REHT.....	I-16, I-17, I-18, I-19	YTW36RT362REKHT.....	I-18
YTS48RT48RSHT.....	I-21	YTU25R4W.....	H-33	YTW34R.....	I-3	YTW36RT36REK.....	I-5
YTS49AR.....	I-34	YTU26R26R.....	H-33	YTW34R34REK.....	I-3	YTW36RT36REKHT.....	I-18
YTS49ART.....	I-36	YTU27R27R.....	H-33	YTW34R34REKHT.....	I-16	YTW391A.....	I-29
YTS49R483RS.....	I-7	YTU27R28R.....	H-33	YTW34RD.....	I-4	YTW391A431AEK.....	I-29
YTS49R483RSHT.....	I-20	YTU30R30R.....	H-33	YTW34RD34REK.....	I-4	YTW391AD.....	I-31
YTS49R48RS.....	I-7	YTU321R26R.....	H-33				
YTS49R48RSHT.....	I-20	YTU321R27R.....	H-33				
YTS49RT483RS.....	I-8	YTU321R28R.....	H-33				

ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YTW391AD431AEK	I-31	YTW445ADT	I-32	YTW47A	I-29	YTW48RT	I-5
YTW391ADT	I-32	YTW445ADT463AEK	I-32	YTW47A47AEK	I-29	YTW48RT481REK	I-5
YTW391ADT431AEK	I-32	YTW445AT	I-30	YTW47AD	I-31	YTW48RT481REKHT	I-18
YTW391AT	I-30	YTW445AT463AEK	I-30	YTW47AD47AEK	I-31	YTW48RT48REKHT	I-5
YTW391AT431AEK	I-30	YTW451A	I-29	YTW47ADT	I-32	YTW48RT48REKHT	I-18
YTW39A	I-29	YTW451A463AEK	I-29	YTW47ADT47AEK	I-32	YTW48RTTHT	I-18
YTW39A39AEK	I-29	YTW451AD	I-31	YTW47AE	I-29, I-30, I-31, I-32	YTW49R	I-3
YTW39AD	I-31	YTW451AD463AEK	I-31	YTW47AT	I-30	YTW49R483REK	I-3
YTW39AD39AEK	I-31	YTW451ADT	I-32	YTW47AT47AEK	I-30	YTW49R483REKHT	I-16
YTW39ADT	I-32	YTW451ADT463AEK	I-32	YTW481RE	I-3, I-4, I-5, I-6	YTW49R50REK	I-3
YTW39ADT39AEK	I-32	YTW451AT	I-30	YTW481REHT	I-16, I-17, I-18, I-19	YTW49R50REKHT	I-16
YTW39AE	I-29, I-30, I-31, I-32	YTW451AT463AEK	I-30	YTW483RE	I-3, I-4, I-5, I-6	YTW49RD	I-4
YTW39AT	I-30	YTW451R	I-3	YTW483REHT	I-16, I-17, I-18, I-19	YTW49RD483REK	I-4
YTW39AT39AEK	I-30	YTW451R45REK	I-3	YTW484A	I-29	YTW49RD483REKHT	I-17
YTW39R	I-3	YTW451R45REKHT	I-16	YTW484A484AEK	I-29	YTW49RD50REK	I-4
YTW39R43REK	I-3	YTW451R481REK	I-3	YTW484AD	I-31	YTW49RD50REKHT	I-17
YTW39R43REKHT	I-16	YTW451R481REKHT	I-16	YTW484AD484AEK	I-31	YTW49RDHT	I-17
YTW39RD	I-4	YTW451R48REK	I-3	YTW484ADT	I-32	YTW49RDT	I-6
YTW39RD43REK	I-4	YTW451R48REKHT	I-16	YTW484AE	I-29, I-30, I-31, I-32	YTW49RDT483REK	I-6
YTW39RD43REKHT	I-17	YTW451RD	I-4	YTW484AT	I-30	YTW49RDT483REKHT	I-19
YTW39RDHT	I-17	YTW451RD45REK	I-4	YTW484AT484AEK	I-30	YTW49RDT50REK	I-6
YTW39RDT	I-6	YTW451RD45REKHT	I-17	YTW486A	I-29	YTW49RDT50REKHT	I-19
YTW39RDT43REK	I-6	YTW451RD481REK	I-4	YTW486A486AEK	I-29	YTW49RDTTHT	I-19
YTW39RDT43REKHT	I-19	YTW451RD481REKHT	I-17	YTW486AD	I-31	YTW49RHT	I-16
YTW39RDTHT	I-19	YTW451RD48REK	I-4	YTW486AD486AEK	I-31	YTW49RT	I-5
YTW39RE15ACCK4	I-47	YTW451RD48REKHT	I-19	YTW486ADT	I-32	YTW49RT483REK	I-5
YTW39RED15ACCK4	I-47	YTW451RDHT	I-17	YTW486ADT486AEK	I-32	YTW49RT483REKHT	I-18
YTW39RHT	I-16	YTW451RDT	I-6	YTW486AE	I-29, I-30, I-31, I-32	YTW49RT50REK	I-5
YTW39RT	I-5	YTW451RDT45REK	I-6	YTW486AT	I-30	YTW49RT50REKHT	I-18
YTW39RT43REK	I-5	YTW451RDT45REKHT	I-19	YTW486AT486AEK	I-30	YTW49RTTHT	I-18
YTW39RT43REKHT	I-18	YTW451RDT481REK	I-6	YTW486AT486AEK	I-30	YTW50RE	I-3, I-4, I-5, I-6
YTW39RTACCC2	I-49	YTW451RDT481REKHT	I-19	YTW486AT	I-30	YTW50REHT	I-16, I-17, I-18, I-19
YTW39RTHT	I-18	YTW451RDT48REK	I-6	YTW48A	I-29	YTW52R	I-3, I-4, I-5, I-6
YTW431A	I-29	YTW451RDT48REKHT	I-19	YTW48A484AEK	I-29	YTW52R50REK	I-3
YTW431A431AEK	I-29	YTW451RDHT	I-19	YTW48AD	I-31	YTW52R50REKHT	I-16
YTW431AD	I-31	YTW451RE15ACCK4	I-47	YTW48AD484AEK	I-31	YTW52R521REK	I-3
YTW431AD431AEK	I-31	YTW451RED15ACCK4	I-47	YTW48ADT	I-32	YTW52R521REKHT	I-16
YTW431ADT	I-32	YTW451RHT	I-16	YTW48ADT484AEK	I-32	YTW52R56REK	I-3
YTW431ADT431AEK	I-32	YTW451RT	I-5	YTW48ADT484AEK	I-32	YTW52R56REKHT	I-16
YTW431AE	I-29, I-30, I-31, I-32	YTW451RT45REK	I-5	YTW48ADT484AEK	I-32	YTW52RD	I-4
YTW431AT	I-30	YTW451RT45REKHT	I-18	YTW48ADT484AEK	I-32	YTW52RD50REK	I-4
YTW431AT431AEK	I-30	YTW451RT481REK	I-5	YTW48ADT484AEK	I-32	YTW52RD50REKHT	I-17
YTW43R	I-3	YTW451RT481REKHT	I-18	YTW48ADT484AEK	I-32	YTW52RD521REK	I-4
YTW43R43REK	I-3	YTW451RT48REK	I-5	YTW48ADT484AEK	I-32	YTW52RD521REKHT	I-17
YTW43R43REKHT	I-16	YTW451RT48REKHT	I-18	YTW48ADT484AEK	I-32	YTW52RD56REK	I-4
YTW43RD	I-4	YTW451RTHT	I-18	YTW48AT484AEK	I-30	YTW52RD56REKHT	I-17
YTW43RD43REK	I-4	YTW457A	I-29	YTW48R	I-3	YTW52RD56REKHT	I-17
YTW43RD43REKHT	I-17	YTW457A463AEK	I-29	YTW48R481REK	I-3	YTW52RD56REKHT	I-17
YTW43RDHT	I-17	YTW457AD	I-31	YTW48R481REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RDT	I-6	YTW457AD463AEK	I-31	YTW48R48REK	I-3	YTW52RD56REKHT	I-17
YTW43RDT43REK	I-6	YTW457ADT	I-32	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RDT43REKHT	I-19	YTW457ADT463AEK	I-32	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RDHT	I-19	YTW457AT	I-30	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RE	I-3, I-4, I-5, I-6	YTW457AT463AEK	I-30	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RE15ACCK4	I-47	YTW45RE	I-3, I-4, I-5, I-6	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RED15ACCK4	I-47	YTW45REHT	I-16, I-17, I-18, I-19	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43REHT	I-16, I-17, I-18, I-19	YTW463A	I-29	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RHT	I-16	YTW463A463AEK	I-29	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RT	I-5	YTW463AD	I-31	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RT43REK	I-5	YTW463AD463AEK	I-31	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RT43REKHT	I-18	YTW463ADT	I-32	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW43RTHT	I-18	YTW463ADT463AEK	I-32	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW445A	I-29	YTW463AE	I-29, I-30, I-31, I-32	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW445A463AEK	I-29	YTW463AT	I-30	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW445AD	I-31	YTW463AT463AEK	I-30	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
YTW445AD463AEK	I-31	YTW470MRE15ACK5	I-47	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17
		YTW470MRED15ACK5	I-47	YTW48R48REKHT	I-3	YTW52RD56REKHT	I-17



**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
YTW52RT56REK.....	I-5	YTW58RDT58REKHT.....	I-19	Z2529.....	K-33, K-34	Z3340.....	K-33, K-34
YTW52RT56REKHT.....	I-18	YTW58RDHT.....	I-19	Z2530.....	K-33, K-34	Z3344.....	K-34
YTW52RTHT.....	I-18	YTW58RE.....	I-3, I-4, I-5, I-6	Z2532.....	K-33, K-34	Z3434.....	K-33, K-34
YTW549R.....	I-3	YTW58REHT.....	I-16, I-17, I-18, I-19	Z2534.....	K-33, K-34	Z3436.....	K-33, K-34
YTW549R521REK.....	I-3	YTW58RHT.....	I-16	Z2536.....	K-34	Z3440.....	K-33, K-34
YTW549R521REKHT.....	I-16	YTW58RT.....	I-5	Z2628.....	K-34	Z3444.....	K-33, K-34
YTW549R549REK.....	I-3	YTW58RTHT.....	I-18	Z2629.....	K-33, K-34	Z34NR.....	K-32
YTW549R549REKHT.....	I-16	YTW58RT58REK.....	I-5	Z2630.....	K-33, K-34	Z34NRB.....	K-32
YTW549R56REK.....	I-3	YTW58RT58REKHT.....	I-18	Z2632.....	K-33, K-34	Z34P.....	K-31
YTW549R56REKHT.....	I-16	YTW58RTHT.....	I-18	Z2634.....	K-33, K-34	Z3536.....	K-33
YTW549RD.....	I-4	YTW58RTHT.....	I-18	Z2636.....	K-34	Z3540.....	K-33
YTW549RD521REK.....	I-4	YTW590RE.....	I-3, I-4, I-5, I-6	Z2640.....	K-34	Z3544.....	K-33
YTW549RD521REKHT.....	I-17	YTW590REHT.....	I-16, I-17, I-18, I-19	Z2728.....	K-33, K-34	Z3636.....	K-33, K-34
YTW549RD549REK.....	I-4	YTW591RE.....	I-3, I-4, I-5, I-6	Z2729.....	K-34	Z3640.....	K-33, K-34
YTW549RD549REKHT.....	I-17	YTW591REHT.....	I-16, I-17, I-18, I-19	Z2730.....	K-33, K-34	Z3644.....	K-33, K-34
YTW549RD56REK.....	I-4	YTW59R.....	I-3	Z2732.....	K-33, K-34	Z36NR.....	K-32
YTW549RD56REKHT.....	I-17	YTW59R591REK.....	I-3	Z2734.....	K-33, K-34	Z-37.5.....	K-60
YTW549RDHT.....	I-17	YTW59R591REKHT.....	I-16, I-17, I-18, I-19	Z2736.....	K-34	Z3740.....	K-33
YTW549RDT.....	I-6	YTW59R591REHT.....	I-16, I-17, I-18, I-19	Z2740.....	K-34	Z3744.....	K-33
YTW549RDT521REK.....	I-6	YTW59R.....	I-3	Z2828.....	K-33	Z3840.....	K-33
YTW549RDT521REKHT.....	I-19	YTW59R591REK.....	I-3	Z2829.....	K-33, K-34	Z3844.....	K-33
YTW549RDT549REK.....	I-6	YTW59R591REKHT.....	I-16	Z2830.....	K-33, K-34	Z3940.....	K-33
YTW549RDT549REKHT.....	I-19	YTW59R591REK.....	I-3	Z2832.....	K-33, K-34	Z3944.....	K-33
YTW549RDT56REK.....	I-6	YTW59R591REKHT.....	I-16	Z2834.....	K-33, K-34	Z3C28.....	K-34
YTW549RDT56REKHT.....	I-19	YTW59RD.....	I-4	Z2836.....	K-34	Z4040.....	K-33
YTW549RDHT.....	I-19	YTW59RD591REK.....	I-4	Z2840.....	K-34	Z4044.....	K-33
YTW549RE.....	I-3, I-4, I-5, I-6	YTW59RD591REKHT.....	I-17	Z2844.....	K-34	Z40NR.....	K-32
YTW549REHT.....	I-16, I-17, I-18, I-19	YTW59RD591REKHT.....	I-17	Z28NR.....	K-32	Z40NRA.....	K-32
YTW549RHT.....	I-16	YTW59RDHT.....	I-17	Z2929.....	K-33, K-34	Z40P.....	K-31
YTW549RT.....	I-5	YTW59RDT.....	I-6	Z2930.....	K-33, K-34	Z4144.....	K-33
YTW549RT521REK.....	I-5	YTW59RDT591REK.....	I-6	Z2932.....	K-33, K-34	Z4244.....	K-33
YTW549RT521REKHT.....	I-18	YTW59RDT591REKHT.....	I-19	Z2934.....	K-33, K-34	Z4344.....	K-33
YTW549RT549REK.....	I-5	YTW59RDT591REKHT.....	I-19	Z2936.....	K-33, K-34	Z-44.....	K-60
YTW549RT549REKHT.....	I-18	YTW59RDT59REK.....	I-6	Z2940.....	K-33, K-34	Z4444.....	K-33
YTW549RT56REK.....	I-5	YTW59RDT59REKHT.....	I-19	Z2944.....	K-34	Z44NR.....	K-32
YTW549RT56REKHT.....	I-18	YTW59RDHT.....	I-19	Z29NR.....	K-32	Z4C28.....	K-33
YTW549RTHT.....	I-18	YTW59RE.....	I-3, I-4, I-5, I-6	Z29P.....	K-31	Z4C29.....	K-33
YTW56R.....	I-3	YTW59REHT.....	I-16, I-17, I-18, I-19	Z2C28.....	K-33, K-34	Z4C30.....	K-33
YTW56R590REK.....	I-3	YTW59RHT.....	I-16	Z2C29.....	K-33, K-34	Z-50.....	K-60
YTW56R590REKHT.....	I-16	YTW59RT.....	I-5	Z2C30.....	K-33	Z6C28.....	K-33
YTW56RD.....	I-4	YTW59RT591REK.....	I-5	Z2C32.....	K-33	Z6C29.....	K-33
YTW56RD590REK.....	I-4	YTW59RT591REKHT.....	I-18	Z2C34.....	K-33	Z6C30.....	K-33
YTW56RD590REKHT.....	I-17	YTW59RT591REKHT.....	I-18	Z2MLDN2-20.....	K-29	Z-7.5.....	K-60
YTW56RDHT.....	I-17	YTW59RT591REKHT.....	I-18	Z2MLDN2-30.....	K-29	Z72C3029.....	K-36
YTW56RDT.....	I-6	YTW59RT591REKHT.....	I-18	Z2MLDN2-30B.....	K-29	Z88C3429.....	K-36
YTW56RDT590REK.....	I-6	YTW59RT591REKHT.....	I-18	Z2MLDN4-20.....	K-29	ZM10-15.....	K-9
YTW56RDT590REKHT.....	I-19	YTW59RTHT.....	I-18	Z2MLDN4-30.....	K-29	ZM10-25.....	K-15
YTW56RDHT.....	I-19	YTW610MRE15ACK5.....	I-48	Z2MLDN4-30B.....	K-29	ZM10-25B.....	K-15
YTW56RE.....	I-3, I-4, I-5, I-6	YTW610MRED15ACK5.....	I-48	Z2MLDN6-20.....	K-29	ZM10-30.....	K-21
YTW56REHT.....	I-16, I-17, I-18, I-19	YTW690MRE15ACK5.....	I-48	Z2MLDN6-30.....	K-29	ZM10-30B.....	K-21
YTW56RHT.....	I-16	YTW690MRED15ACK5.....	I-48	Z2MLDN6-30B.....	K-29	ZM12-15.....	K-9
YTW56RT.....	I-5	YTW710MRE15ACK5.....	I-48	Z-30.....	K-60	ZM12-25.....	K-15
YTW56RT590REK.....	I-5	YTW710MRED15ACK5.....	I-48	Z3030.....	K-33	ZM12-25B.....	K-15
YTW56RT590REKHT.....	I-18	YTW760MRE15ACK5.....	I-48	Z3032.....	K-33	ZM12-30.....	K-21
YTW56RTHT.....	I-18	YTW760MRED15ACK5.....	I-48	Z3034.....	K-33	ZM12-30B.....	K-21
YTW570MRE15ACK5.....	I-48	YTW780MRE15ACK5.....	I-48	Z3036.....	K-33	ZM14-15.....	K-9
YTW570MRED15ACK5.....	I-48	Z104C4034.....	K-36	Z3040.....	K-33	ZM14-25.....	K-15
YTW58R.....	I-3	Z104C4434.....	K-36	Z30NR.....	K-32	ZM14-25B.....	K-15
YTW58R58REK.....	I-3	Z-11.....	K-60	Z3132.....	K-33	ZM14-30.....	K-21
YTW58R58REKHT.....	I-16	Z144C4840.....	K-36	Z3134.....	K-33	ZM14-30B.....	K-21
YTW58RD.....	I-4	Z-15.....	K-60	Z3136.....	K-33	ZM16-15.....	K-9
YTW58RD58REK.....	I-4	Z1C28.....	K-34	Z3140.....	K-33	ZM16-25.....	K-15
YTW58RD58REKHT.....	I-17	Z1C29.....	K-33, K-34	Z3232.....	K-33, K-34	ZM16-25B.....	K-15
YTW58RDHT.....	I-17	Z1C30.....	K-33, K-34	Z3234.....	K-33, K-34	ZM16-30.....	K-21
YTW58RDT.....	I-6	Z1C32.....	K-33, K-34	Z3236.....	K-33, K-34	ZM16-30B.....	K-21
YTW58RDT58REK.....	I-6	Z1C34.....	K-33	Z3240.....	K-33, K-34	ZM4-15.....	K-9
YTW58RDT58REKHT.....	I-6	Z22.5.....	K-60	Z3244.....	K-34	ZM4-25.....	K-15
YTW58RDT58REKHT.....	I-6	Z-25.....	K-60	Z32NR.....	K-32	ZM4-25B.....	K-15
YTW58RDT58REKHT.....	I-6	Z2528.....	K-33, K-34	Z3334.....	K-33, K-34	ZM4-30.....	K-21
YTW58RDT58REKHT.....	I-6			Z3336.....	K-33, K-34	ZM4-30B.....	K-21

## ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)

Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #	Catalog Number	Page #
ZM6-15.....	K-9	ZMK4-25A4.....	K-20	ZML4-25B.....	K-18	ZMLDN4-30B.....	K-28
ZM6-25.....	K-15	ZMK4-25B.....	K-20	ZML4-25B12.....	K-18	ZMLDN5-15.....	K-27
ZM6-25B.....	K-15	ZMK4-25B12.....	K-20	ZML4-30.....	K-24	ZMLDN5-20.....	K-27
ZM6-30.....	K-21	ZMK430.....	K-26	ZML4-30B.....	K-24	ZMLDN5-20B.....	K-27
ZM6-30B.....	K-21	ZMK430B.....	K-26	ZML5-15.....	K-12	ZMLDN5-25.....	K-28
ZM8-15.....	K-9	ZMK5-15.....	K-14	ZML5-15A3.....	K-12	ZMLDN5-25B.....	K-28
ZM8-25.....	K-15	ZMK5-15A3.....	K-14	ZML5-25.....	K-18	ZMLDN5-30.....	K-28
ZM8-25B.....	K-15	ZMK5-15A4.....	K-14	ZML5-25A3.....	K-18	ZMLDN5-30B.....	K-28
ZM8-30.....	K-21	ZMK5-25.....	K-20	ZML5-25B.....	K-18	ZMLDN6-15.....	K-27
ZM8-30B.....	K-21	ZMK5-25A4.....	K-20	ZML5-25B12.....	K-18	ZMLDN6-20.....	K-27
ZMDN3-20.....	K-30	ZMK5-25B.....	K-20	ZML5-30.....	K-24	ZMLDN6-20B.....	K-27
ZMDN3-20B.....	K-30	ZMK5-25B12.....	K-20	ZML5-30B.....	K-24	ZMLDN6-25.....	K-28
ZMDN3-25.....	K-30	ZMK530.....	K-26	ZML6-15.....	K-12	ZMLDN6-25B.....	K-28
ZMDN4-20.....	K-30	ZMK530B.....	K-26	ZML6-15A3.....	K-12	ZMLDN6-30.....	K-28
ZMDN4-20B.....	K-30	ZMK6-15.....	K-14	ZML6-25.....	K-18	ZMLDN6-30B.....	K-28
ZMDN4-25.....	K-30	ZMK6-15A3.....	K-14	ZML6-25A3.....	K-18	ZMS29.....	K-35
ZMDN5-20.....	K-30	ZMK6-15A4.....	K-14	ZML6-25B.....	K-18	ZMS34.....	K-35
ZMDN5-20B.....	K-30	ZMK6-25.....	K-20	ZML6-25B12.....	K-18	ZMS40.....	K-35
ZMDN5-25.....	K-30	ZMK6-25A4.....	K-20	ZML6-30.....	K-24	ZMT11-15.....	K-10
ZMDN6-20.....	K-30	ZMK6-25B.....	K-20	ZML6-30B.....	K-24	ZMT11-15A3.....	K-10
ZMDN6-20B.....	K-30	ZMK6-25B12.....	K-20	ZML7-15.....	K-12	ZMT11-25.....	K-16
ZMDN6-25.....	K-30	ZMK630.....	K-26	ZML7-15A3.....	K-12	ZMT11-25A3.....	K-16
ZME2-15.....	K-11	ZMK630B.....	K-26	ZML7-25.....	K-18	ZMT11-25B.....	K-16
ZME2-25.....	K-17	ZMK7-15.....	K-14	ZML7-25A3.....	K-18	ZMT11-25B12.....	K-16
ZME2-25B.....	K-17	ZMK7-15A3.....	K-14	ZML7-25B.....	K-18	ZMT11-30.....	K-22
ZME230.....	K-23	ZMK7-15A4.....	K-14	ZML7-25B12.....	K-18	ZMT11-30B.....	K-22
ZME230B.....	K-23	ZMK7-25.....	K-20	ZML7-30.....	K-24	ZMT13-15.....	K-10
ZME3-15.....	K-11	ZMK7-25A4.....	K-20	ZML7-30B.....	K-24	ZMT13-15A3.....	K-10
ZME3-25.....	K-17	ZMK7-25B.....	K-20	ZML8-15.....	K-12	ZMT13-25.....	K-16
ZME3-25B.....	K-17	ZMK7-25B12.....	K-20	ZML8-25.....	K-18	ZMT13-25A3.....	K-16
ZME330.....	K-23	ZMK730.....	K-26	ZML8-25A3.....	K-18	ZMT13-25B.....	K-16
ZME330B.....	K-23	ZMK730B.....	K-26	ZML8-25B.....	K-18	ZMT13-25B12.....	K-16
ZME4-15.....	K-11	ZMK8-15.....	K-14	ZML8-25B12.....	K-18	ZMT13-30.....	K-22
ZME4-25.....	K-17	ZMK8-15A3.....	K-14	ZML8-30.....	K-24	ZMT13-30B.....	K-22
ZME4-25B.....	K-17	ZMK8-15A4.....	K-14	ZML8-30B.....	K-24	ZMT15-15.....	K-10
ZME430.....	K-23	ZMK8-25.....	K-20	ZML9-15.....	K-12	ZMT15-15A3.....	K-10
ZME430B.....	K-23	ZMK8-25A4.....	K-20	ZML9-15A3.....	K-12	ZMT15-25.....	K-16
ZME5-15.....	K-11	ZMK8-25B.....	K-20	ZML9-25.....	K-18	ZMT15-25A3.....	K-16
ZME5-25.....	K-17	ZMK8-25B12.....	K-20	ZML9-25A3.....	K-18	ZMT15-25B.....	K-16
ZME5-25B.....	K-17	ZMK830.....	K-26	ZML9-25B.....	K-18	ZMT15-25B12.....	K-16
ZME530.....	K-23	ZMK830B.....	K-26	ZML9-25B12.....	K-18	ZMT15-30.....	K-22
ZME530B.....	K-23	ZMK9-15.....	K-14	ZML9-30.....	K-24	ZMT15-30B.....	K-22
ZME6-15.....	K-11	ZMK9-15A3.....	K-14	ZML9-30B.....	K-24	ZMT17-15.....	K-10
ZME6-25.....	K-17	ZMK9-15A4.....	K-14	ZMLDN1-15.....	K-27	ZMT17-15A3.....	K-10
ZME6-25B.....	K-17	ZMK9-25.....	K-20	ZMLDN1-20.....	K-27	ZMT17-25.....	K-16
ZME630.....	K-23	ZMK9-25A4.....	K-20	ZMLDN1-20B.....	K-27	ZMT17-25A3.....	K-16
ZME630B.....	K-23	ZMK9-25B.....	K-20	ZMLDN1-25.....	K-28	ZMT17-25B.....	K-16
ZME7-15.....	K-11	ZMK9-25B12.....	K-20	ZMLDN1-25B.....	K-28	ZMT17-25B12.....	K-16
ZME7-25.....	K-17	ZMK930.....	K-26	ZMLDN1-30.....	K-28	ZMT17-30.....	K-22
ZME7-25B.....	K-17	ZML0-15A3.....	K-12	ZMLDN1-30B.....	K-28	ZMT17-30B.....	K-22
ZME730.....	K-23	ZML2-15.....	K-12	ZMLDN2-15.....	K-27	ZMT3-15.....	K-10
ZME730B.....	K-23	ZML2-15A3.....	K-12	ZMLDN2-20.....	K-27	ZMT3-15A3.....	K-10
ZME8-15.....	K-11	ZML2-25.....	K-18	ZMLDN2-20B.....	K-27	ZMT3-25.....	K-16
ZME8-25.....	K-17	ZML2-25A3.....	K-18	ZMLDN2-25.....	K-28	ZMT3-25B.....	K-16
ZME8-25B.....	K-17	ZML2-25B.....	K-18	ZMLDN2-25B.....	K-28	ZMT3-25A3.....	K-16
ZME830.....	K-23	ZML2-25B12.....	K-18	ZMLDN2-30.....	K-28	ZMT3-25B12.....	K-16
ZME830B.....	K-23	ZML2-30.....	K-24	ZMLDN2-30B.....	K-28	ZMT3-30.....	K-22
ZMK10-15.....	K-14	ZML2-30B.....	K-24	ZMLDN3-15.....	K-27	ZMT3-30B.....	K-22
ZMK10-15A3.....	K-14	ZML3-15.....	K-12	ZMLDN3-20.....	K-27	ZMT5-15.....	K-10
ZMK10-15A4.....	K-14	ZML3-15A3.....	K-12	ZMLDN3-20B.....	K-27	ZMT5-15A3.....	K-10
ZMK10-25.....	K-20	ZML3-25.....	K-18	ZMLDN3-25.....	K-28	ZMT5-25.....	K-16
ZMK10-25A4.....	K-20	ZML3-25A3.....	K-18	ZMLDN3-25B.....	K-28	ZMT5-25A3.....	K-16
ZMK10-25B.....	K-20	ZML3-25B.....	K-18	ZMLDN3-30.....	K-28	ZMT5-25B.....	K-16
ZMK10-25B12.....	K-20	ZML3-25B12.....	K-18	ZMLDN3-30B.....	K-28	ZMT5-25B12.....	K-16
ZMK1030.....	K-26	ZML3-30.....	K-24	ZMLDN4-15.....	K-27	ZMT5-30.....	K-22
ZMK1030B.....	K-26	ZML3-30B.....	K-24	ZMLDN4-20.....	K-27	ZMT5-30B.....	K-22
ZMK4-15.....	K-14	ZML4-15.....	K-12	ZMLDN4-20B.....	K-27	ZMT7-15.....	K-10
ZMK4-15A3.....	K-14	ZML4-15A3.....	K-12	ZMLDN4-25.....	K-28	ZMT7-15A3.....	K-10
ZMK4-15A4.....	K-14	ZML4-25.....	K-18	ZMLDN4-25B.....	K-28	ZMT7-25.....	K-16
ZMK4-25.....	K-20	ZML4-25A3.....	K-18	ZMLDN4-30.....	K-28	ZMT7-25A3.....	K-16

**ALPHA-NUMERIC INDEX BY CATALOG NUMBER (Continued)**

<b>Catalog Number</b>	<b>Page #</b>	<b>Catalog Number</b>	<b>Page #</b>
ZMT7-25B.....	K-16	ZMX6-25.....	K-19
ZMT7-25B12.....	K-16	ZMX6-25A4.....	K-19
ZMT7-30.....	K-22	ZMX6-25B.....	K-19
ZMT7-30B.....	K-22	ZMX6-25B12.....	K-19
ZMT9-15.....	K-10	ZMX6-30.....	K-25
ZMT9-15A3.....	K-10	ZMX6-30B.....	K-25
ZMT9-25.....	K-16	ZMX8-15.....	K-13
ZMT9-25A3.....	K-16	ZMX8-15A3.....	K-13
ZMT9-25B.....	K-16	ZMX8-15A4.....	K-13
ZMT9-25B12.....	K-16	ZMX8-25.....	K-19
ZMT9-30B.....	K-22	ZMX8-25A4.....	K-19
ZMTDN1015.....	K-31	ZMX8-25B.....	K-19
ZMTDN81025.....	K-31	ZMX8-25B12.....	K-19
ZMTDN815.....	K-31	ZMX8-30.....	K-25
ZMTDN820.....	K-31	ZMX8-30B.....	K-25
ZMX10-15.....	K-13		
ZMX10-15A3.....	K-13		
ZMX10-15A4.....	K-13		
ZMX10-25.....	K-19		
ZMX10-25A4.....	K-19		
ZMX10-25B.....	K-19		
ZMX10-25B12.....	K-19		
ZMX10-30.....	K-25		
ZMX10-30B.....	K-25		
ZMX12-15.....	K-13		
ZMX12-15A3.....	K-13		
ZMX12-15A4.....	K-13		
ZMX12-25.....	K-19		
ZMX12-25A4.....	K-19		
ZMX12-25B.....	K-19		
ZMX12-25B12.....	K-19		
ZMX12-30.....	K-25		
ZMX14-15.....	K-13		
ZMX14-15A3.....	K-13		
ZMX14-15A4.....	K-13		
ZMX14-25.....	K-19		
ZMX14-25A4.....	K-19		
ZMX14-25B.....	K-19		
ZMX14-25B12.....	K-19		
ZMX14-30.....	K-25		
ZMX14-30B.....	K-25		
ZMX16-15.....	K-13		
ZMX16-15A3.....	K-13		
ZMX16-15A4.....	K-13		
ZMX16-25.....	K-19		
ZMX16-25A4.....	K-19		
ZMX16-25B.....	K-19		
ZMX16-25B12.....	K-19		
ZMX16-30.....	K-25		
ZMX18-15.....	K-13		
ZMX18-15A3.....	K-13		
ZMX18-15A4.....	K-13		
ZMX18-25.....	K-19		
ZMX18-25A4.....	K-19		
ZMX18-25B.....	K-19		
ZMX18-25B12.....	K-19		
ZMX18-30.....	K-25		
ZMX18-30B.....	K-25		
ZMX4-15.....	K-13		
ZMX4-15A3.....	K-13		
ZMX4-15A4.....	K-13		
ZMX4-25.....	K-19		
ZMX4-25A4.....	K-19		
ZMX4-25B.....	K-19		
ZMX4-25B12.....	K-19		
ZMX4-30.....	K-25		
ZMX4-30B.....	K-25		
ZMX6-15.....	K-13		
ZMX6-15A3.....	K-13		
ZMX6-15A4.....	K-13		

---

## TERMS AND CONDITIONS

1. **Applicability.** Burndy, LLC ("Seller") hereby offers for sale to the buyer named on the face hereof ("Buyer") the products listed on the face hereof (the "Products") on the express condition that Buyer agrees to accept and be bound by the terms and conditions set forth herein. Any provisions contained in any document issued by Buyer are expressly rejected and if these terms and conditions differ from the terms of Buyer's offer, this document shall be construed as a counter offer and shall not be effective as an acceptance of Buyer's document. Buyer's receipt of Products provided hereunder will constitute Buyer's acceptance of these terms and conditions. This is the complete and exclusive statement of the contract between Seller and Buyer with respect to Buyer's purchase of the Products. No waiver, consent, modification, amendment or change of the terms contained herein shall be binding unless in writing and signed by Seller and Buyer. Seller's failure to object to terms contained in any subsequent communication from Buyer will not be a waiver or modification of the terms set forth herein. All orders are subject to acceptance in writing by an authorized representative of Seller.
2. **Prices.** Prices in written quotations issued by Seller are valid for thirty (30) days. All other prices are subject to change at any time, unless otherwise expressly agreed by Seller. Any prices shown in published literature are maintained as a general source of information and are not quotations or offers to sell. Seller reserves the right to make corrections due to typographical, clerical or engineering errors or due to incomplete or inaccurate information from Buyer. Prices for accepted orders may change due to customer order, quantity, material or engineering changes.
3. **Taxes.** Prices do not include any state, local, use or excise taxes, duties or other charges now or hereafter imposed for which Seller may be liable as a result of the sale, use or delivery of the Products ("Taxes"). In the absence of proper evidence of exemption supplied by Buyer to Seller, Buyer will be responsible for any and all such Taxes.
4. **Minimum Order Quantity.** Orders are subject to standard package sizes.
5. **Payment Terms.** Subject to credit approval, unless otherwise specified on the quotation or invoice, payment terms shall be Net 30 days from the date of invoice. All payment shall be in US dollars. If Buyer fails to pay any amounts when due, Buyer agrees to pay Seller interest thereon at a periodic rate of the greater of the maximum percentage allowed by law or 1% per month. Buyer will also be responsible for all costs and expenses, including attorneys' fees incurred by Seller in collecting any overdue amounts or otherwise enforcing Seller's rights hereunder.
6. **Shipping and Delivery.** Estimated delivery dates are provided in the quotation or acknowledgment, and shall not represent a fixed or guaranteed ship date. Unless otherwise agreed to by Seller, Seller reserves the right to ship at its convenience and/or ship and invoice for partial orders. All deliveries are FCA Seller's location (INCOTERMS 2010); freight may be pre-paid and added to invoice. Seller may stop delivery of Products in transit and/or withhold shipments in whole or in part if Buyer fails to make any payment to Seller when due or otherwise fails to perform under these terms. In the event of a delay due to any cause beyond Seller's reasonable control, Seller reserves the right to terminate the order or to reschedule the shipment within a reasonable period of time, and Seller shall not be responsible for any damages resulting from delay. If delivery is delayed due to any cause within Buyer's control, Seller may place the Products in storage at Buyer's risk and expense and for Buyer's account.
7. **Title and Risk of Loss.** Title and risk of loss to the Products shall pass to Buyer upon delivery by Seller to the carrier.
8. **Cancellations. Returns.** Orders may not be cancelled or modified once accepted by Seller unless agreed upon in writing by Seller. Any cancellation or return of Products shall be subject to Seller's return policies, and may be subject to Seller's cancellation or restocking fee. Seller's restocking policy is available upon request. Non-stock or special order items are non-cancellable and non-returnable. No returns shall be permitted without a Return Material Authorization (RMA).
9. **Packaging. Allocation.** All Products are packaged in accordance with Seller's standard packaging, unless otherwise agreed upon by the parties. Additional or modified packaging requirements may result in an increase in price. In the event of inability for any reason to supply the total demand for the materials or Products specified, Seller may allocate its available supply among any or all purchasers, at its discretion and without liability for failure of performance that may result therefrom.
10. **Tooling.** Any tooling required for an initial order will be billed to Buyer. Any Non-Recurring Engineering (NRE) charges invoiced by Seller shall not be deemed to grant any right, title or interest in any tools, dies, jigs, fixtures and items of like nature, or in any design, engineering, trade secret, patent or other proprietary rights embodied in the tooling, upon Buyer's payment of such charges and such items shall at all times be, and remain, the property of Seller.
11. **Warranty.**
  - 11.1 Seller warrants that the Products will perform substantially in accordance with Seller's published specifications (or other applicable specifications as agreed upon in writing by Seller) and will be free from defects in material and workmanship, when subject to normal, proper and intended usage by properly trained personnel, for the following warranty period, which shall begin on the date of shipment by Seller (the "Warranty Period"): (a) Tools: The Warranty Period shall be as specified in the product literature or, if no period is so specified, five (5) years; (b) UL listed Products: the Warranty Period shall be two (2) years; (c) for all other products, the Warranty Period shall be 30 days. (d) For UL Certified Compression Connection (the "Connection"), provided that the Connection is made using (i) a recommended and properly calibrated tool, (ii) a recommended and properly calibrated die set, and (iii) a compression connector manufactured by Seller and specified in the UL listing for such connection, and Buyer otherwise complies with the requirements set forth in the applicable UL listing, Seller warrants that the Connection will conform with the UL listing for a period of 5 years from the date the Connection is made, provided such Connection is made within one year of the purchase of the connector used in the Connection.
  - 11.2 **Remedies.** During the Warranty Period, Seller agrees to repair or replace Products in order to ensure that the Products perform in accordance with the applicable specifications provided that Buyer shall (a) promptly notify Seller in writing upon the discovery of any defect, which notice shall include the product model and serial number (if applicable) and details of the warranty claim; and (b) after Seller's review, Seller will provide Buyer with a RMA. Buyer may return the defective Products to Seller with all costs prepaid by Buyer. In case of a defect in the Connection during the Warranty Period, Seller shall replace the connector used to make such connection. All replaced parts shall become the property of Seller. Shipment to Buyer of repaired or replacement Products shall be made in accordance with the Delivery provisions herein. Any consumables, including but not limited to, bulbs and batteries, are excluded from warranty. Seller will have no obligation to make repairs, replacements or corrections which are defective as a result of: (i) **normal wear and tear**, (ii) **Buyer's misuse, fault or negligence**, (iii) **use of the Products in a manner for which they were not designed**, or (iv) **improper storage, maintenance, installation and handling of the Products, and in the case of the Connection, Buyer's failure to use Seller's Tool, connector and die set Products, as specified in 11.1 (d) above, and in accordance with the requirements of the UL listing for such Connection.** If Seller determines that Products for which Buyer has requested warranty services are not covered by the warranty hereunder, Buyer shall pay or reimburse Seller for all costs of investigating and responding to such request at Seller's then prevailing time and materials rates. If Seller provides repair services or replacement parts that are not covered by this warranty, Buyer shall pay Seller therefor at Seller's then prevailing time and materials rates. THE OBLIGATIONS CREATED BY THIS WARRANTY TO REPAIR OR REPLACE A DEFECTIVE PRODUCT SHALL BE THE SOLE REMEDY OF BUYER IN THE EVENT OF A DEFECTIVE PRODUCT OR SERVICE. EXCEPT AS EXPRESSLY PROVIDED HEREIN, SELLER DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, ORAL OR WRITTEN, WITH RESPECT TO THE PRODUCTS, INCLUDING WITHOUT LIMITATION ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. In no event will Seller's aggregate liability under warranty exceed the price paid by Buyer for the defective Product. Products supplied by Seller that are obtained by Seller from a third party supplier are not warranted by Seller. At its discretion and to the extent Seller is permitted, Seller agrees to assign to Buyer any warranty rights in such Product that Seller may have from the third party supplier. The Warranty Period for replacement Products shall be the remainder of the original Warranty Period.

## TERMS AND CONDITIONS (Continued)

**12. Intellectual Property.** Seller's specifications and design of the Products and any developments, improvements and intellectual property created under this order, whether made solely by a party or jointly by Buyer and Seller ("Intellectual Property") shall be owned by Seller. Buyer is not granted any interest, right or license with respect to any such intellectual property, except to the extent required to use the Products for the purpose for which it is specifically provided to Buyer in accordance with these terms and conditions.

**13. Software.** With respect to any software incorporated in or forming a part of the Products hereunder ("Software"), Seller and Buyer intend and agree that such Software is being licensed and not sold. Notwithstanding anything to the contrary contained herein, Seller or its licensor, as the case may be, retains all rights and interest in Software. Seller hereby grants to Buyer a royalty-free, non-exclusive, nontransferable license, without power to sublicense, to use Software provided hereunder solely in connection with the Products and to use the related documentation solely for Buyer's own internal business purposes. This license will terminate when Buyer's lawful possession of the Products ceases, unless earlier terminated as provided herein. Buyer agrees to not sell, transfer, license, loan or otherwise make available in any form to Software to any third party. Buyer may not disassemble, decompile or reverse engineer, copy, modify, enhance or otherwise change or supplement the Software without Seller's prior written consent. Seller may terminate this license if Buyer fails to comply with any term or condition herein.

**14. Indemnity. By Seller.** Seller agrees to indemnify, defend and save Buyer from and against any and all damages, liabilities, actions, causes of action, suits, claims, demands, losses, costs and expenses (including without limitation reasonable attorney's fees) ("Claims") for (i) personal injury or death or damage to real property to the extent caused by the negligence or willful misconduct of Seller, its employees, agents or representatives in connection with the performance of services at Buyer's premises and (ii) claims that a Product infringes any valid United States patent, copyright or trade secret. Notwithstanding the foregoing, Seller shall have no liability the extent any such Claims are caused by either (i) the negligence or willful misconduct of Buyer or third party, (ii) use of a Product in combination with equipment or software not supplied by Seller where the Product would not itself be infringing, (iv) Seller's compliance with Buyer's designs, specifications or instructions, (v) use of the Product in an application or environment for which it was not designed or (vi) service, installation or modification of any Product except by Seller. Buyer shall provide Seller prompt written notice of any Claims and Seller shall have the right to assume exclusive control of the defense of such claim or, at the option of the Seller, to settle the same. Buyer agrees to cooperate reasonably with Seller in connection with the performance by Seller of its obligations in this Section. Notwithstanding the above, Seller's infringement related indemnification obligations shall be extinguished and relieved if Seller, at its discretion and at its own expense (a) procures for Buyer the right, at no additional expense to Buyer, to continue using the Product; (b) replaces or modifies the Product so that it becomes non-infringing, provided the modification or replacement does not adversely affect the specifications of the Product or (c) if neither of the preceding is reasonably practicable, refund the purchase price for the Product. THE FOREGOING INDEMNIFICATION PROVISION STATES SELLER'S ENTIRE LIABILITY TO BUYER FOR THE CLAIMS DESCRIBED HEREIN. **By Buyer.** Buyer shall indemnify, defend and hold harmless Seller from and against any and all Claims to the extent arising from or in connection with (i) the negligence or willful misconduct of Buyer; (ii) use of a Product in combination with equipment or software not supplied by Seller where the Product itself would not be infringing; (iii) Seller's compliance with designs, specifications or instructions supplied to Seller by Buyer; (iv) use of a Product in an application or environment for which it was not designed; or (v) modifications of a Product by anyone other than Seller.

**15. Limitation of Liability.** Notwithstanding anything to the contrary contained herein, Seller's aggregate liability for any claim of any kind shall not exceed the price paid by Buyer for the products giving rise to such claim. IN NO EVENT SHALL SELLER BE LIABLE FOR SPECIAL, INCIDENTAL, LIQUIDATED, OR CONSEQUENTIAL DAMAGES HOWSOEVER ARISING OUT OF SELLER'S PERFORMANCE (OR NON-PERFORMANCE) OF THE CONTRACT AND NOTWITHSTANDING WHETHER BUYER MAY HAVE BEEN ADVISED OR IS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

**16. Compliance with Laws. Export Laws.** Seller agrees to observe and comply with all applicable federal, state and local laws, rules, regulations, including but not limited to all applicable laws, regulations, laws, treaties, and agreements relating to the export, re-export, and import of any Product or part of Product. Buyer shall not, without first obtaining any required license to do so from the appropriate U.S. government agency; (i) export or re-export any Product or part of a Product, or (ii) export, re-export, distribute or supply any Product or part of a Product to any restricted or embargoed country or to a person or entity whose privilege to participate in exports has been denied or restricted by the U.S. government. At Seller's request, Buyer will provide information on the end user and end use of any Product or part thereof exported or to be exported by Buyer. Buyer shall cooperate fully with Seller in any audit or inspection related to applicable export or import control laws or regulations, and shall indemnify and hold Seller harmless from, or in connection with, any violation of this section by Buyer or its employees, consultants, or agents.

**17. Miscellaneous.** (a) Any legal claim shall be controlled under the laws of the state of the Seller's primary place of business. Seller and Buyer agree to accept and be bound by the exclusive jurisdiction of the federal and state courts thereof. The application to this Agreement of the U.N. Convention on Contracts for the International Sale of Goods is hereby expressly excluded. (b) In the event that any one or more provisions contained in these terms shall be held by a court of competent jurisdiction to be invalid, illegal or unenforceable in any respect, the validity, legality and enforceability of the remaining provisions contained herein shall remain in full force and effect. (c) Seller's failure to enforce or waiver of a breach of any provision contained herein shall not constitute a waiver of any other breach or of such provision. (d) Any notice or communication required or permitted hereunder shall be in writing and shall be deemed received when personally delivered or three (3) business days after being sent by certified mail, postage prepaid, to a party at the address specified herein or at such other address as either party may from time to time designate to the other. (e) Buyer may not assign or delegate any rights or obligations without Seller's prior written consent. (f) Seller reserves the right to place a Lien and notifications of liens should Seller not be paid for equipment provided hereunder. (g) Buyer agrees that all pricing, discounts, data, design and technical information, operations/maintenance manuals, testing procedures, drawings, schematics and any other information regarding the Products or Seller's processes provided by Seller to Buyer are the confidential and proprietary information of Seller. Buyer agrees to (a) keep such information confidential and not disclose such information to any third party; and (b) use such information solely for Buyer's internal purposes and in connection with the Products supplied hereunder. Nothing herein shall restrict the use of information available to the general public.